


DOL 58 weather sensor

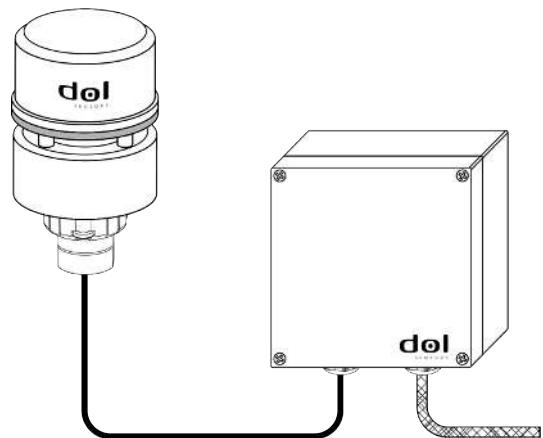

1 Product description


The DOL 58 measures wind direction, wind speed and air pressure/temperature (optional). Wind speed and direction are measured using ultrasound. The weather station thus has no movable parts, which means it is extremely reliable and has an exceptionally long lifetime.

DOL 58 includes:

- Weather sensor
- Connection box
- 5 m/ 16 feet cable to connect the weather sensor with the terminal box
- Mounting bracket for the weather sensor

DOL 58's connection box has three analog outputs:

- Wind direction
- Wind speed
- Air pressure or temperature (supplied upon request)

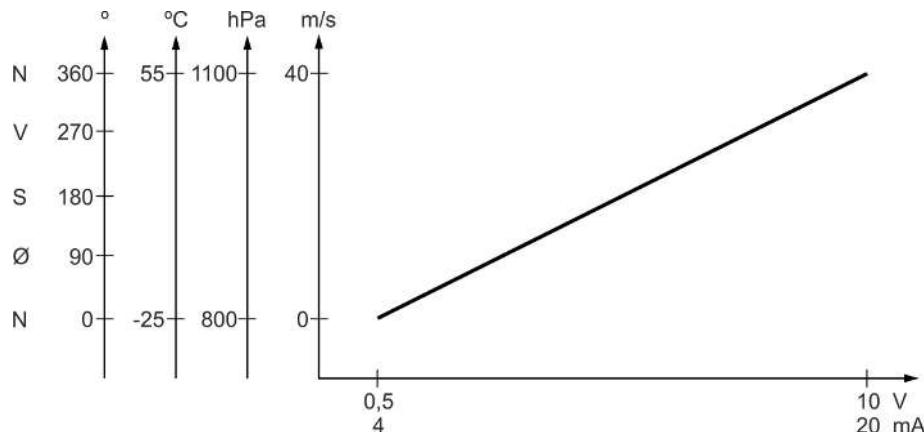

Connection between weather measurement and the analog outputs.


2 Mounting guide

In order to achieve the best possible readings from the weather sensor it is important that the sensor has an "unrestricted view" on all sides. Be careful that rooftops, chimneys, trees, etc. do not block this "unrestricted view" to the weather sensor.


The weather sensor should be mounted on a mast with the accompanying bracket at a minimum of 1.50 m (5 feet) above the ridge of the roof, for example. If using the same mast for e.g. the WLAN antenna, then the weather sensor must be placed at the top of the mast and a minimum of 1 m (3.3 feet) above the WLAN antenna.

It is important:

- that the mast is 100% vertical, as errors will otherwise occur in the readings.
- that the north indicator points northwards.

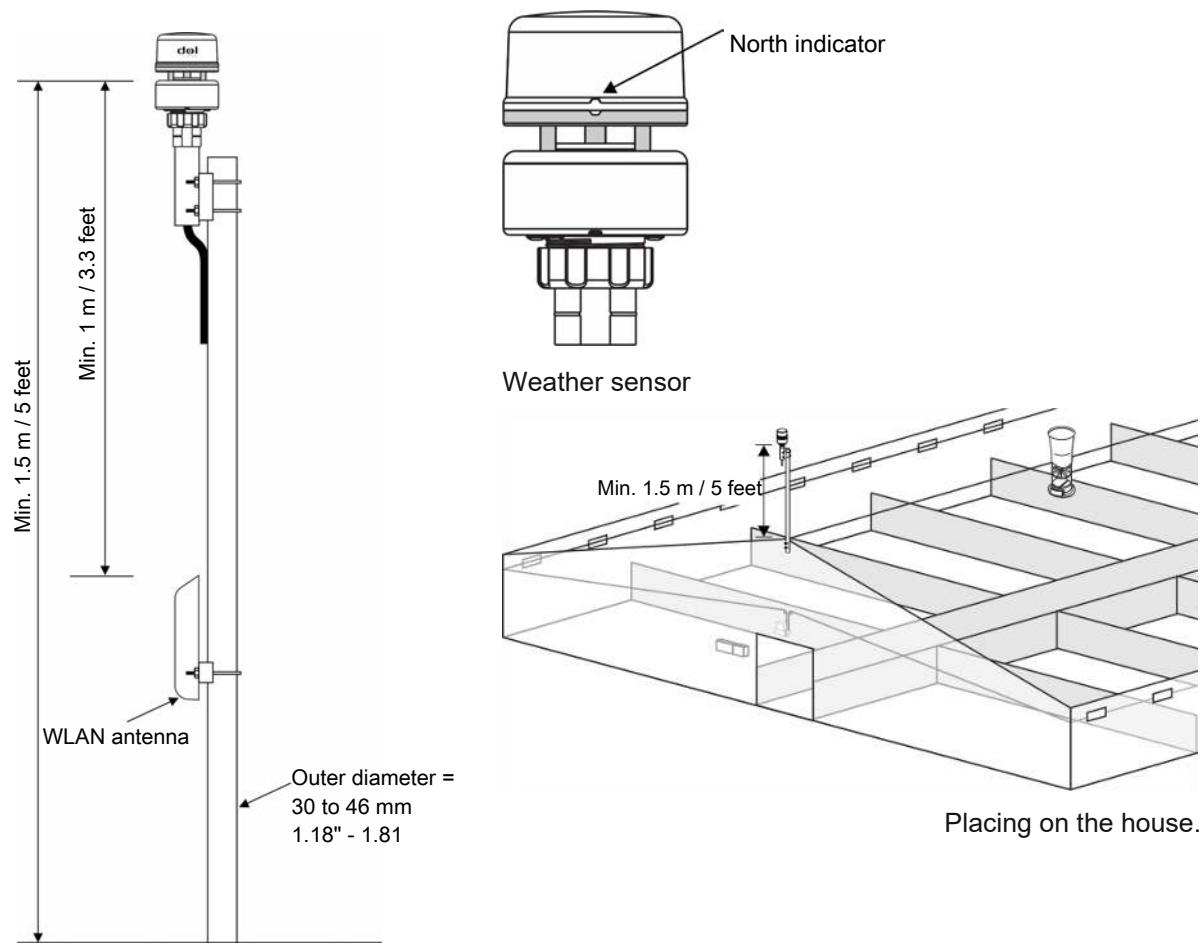

Placing in relation to e.g. the ridge of a roof and any WLAN antenna.

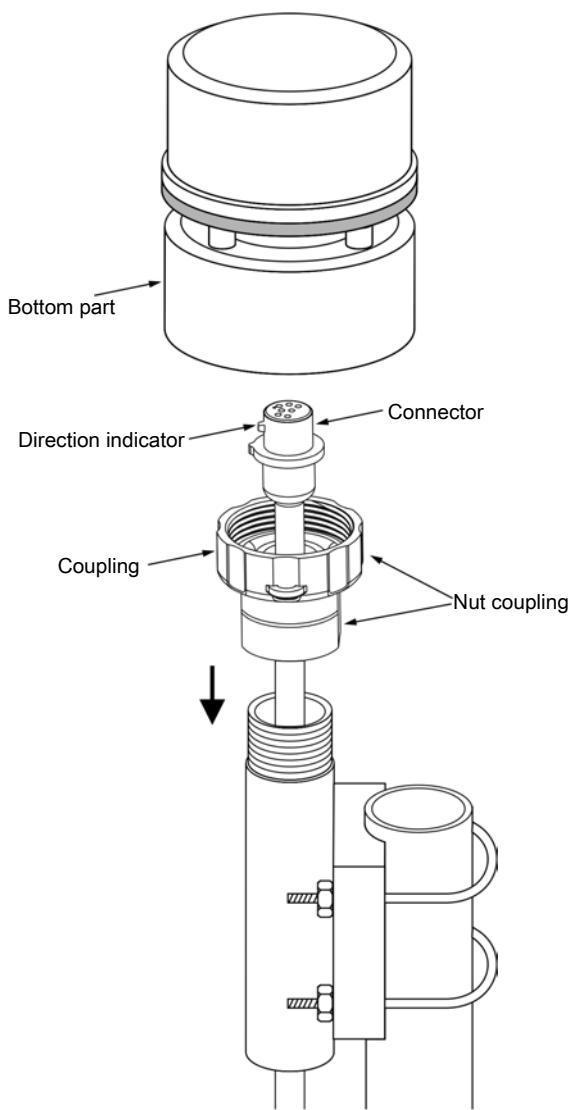

1. Secure the mast bracket to the mast.
2. Pull the cable between the weather sensor and the connection box through the mast bracket. The cable between the weather sensor and the mast bracket is not rodent-protected.
3. Tighten the nut coupling on the mast bracket (*tighten by hand only*).
4. Mount the plug on the weather sensor.
5. Tighten the coupling securely onto the weather sensor. Hold onto the bottom part of the weather sensor only (*tighten by hand only*).
6. The gasket must be adapted to the actual cable with the sealing ring provided.
7. Mount the connection box with the four screws supplied.

Avoid tightening or adjusting the weather sensor by turning the top part of the sensor.

3 Installation guide


3.1 Electrical connection




Installation, servicing and troubleshooting of all electrical equipment must be carried out by qualified personnel in compliance with the applicable national and international standard EN 60204-1 and any other EU standards that are applicable in Europe.

The installation of a power supply isolator is required for each motor and power supply to facilitate voltage-free work on the electrical equipment. The power supply isolator is not included.

3.1.1 Connection of weather sensor

| Number | Wire color | Plug connectors |
|--------|---------------|---|
| 1 | Red (RD) | |
| 2 | Black (BK) | |
| 3 | White (WH) | |
| 4 | Not connected | |
| 5 | Not connected | |
| 6 | Not connected | |
| 7 | Yellow (YE) | |
| 8 | Orange (OG) | |
| 9 | Blue (BU) | |
| 10 | Not connected |  |

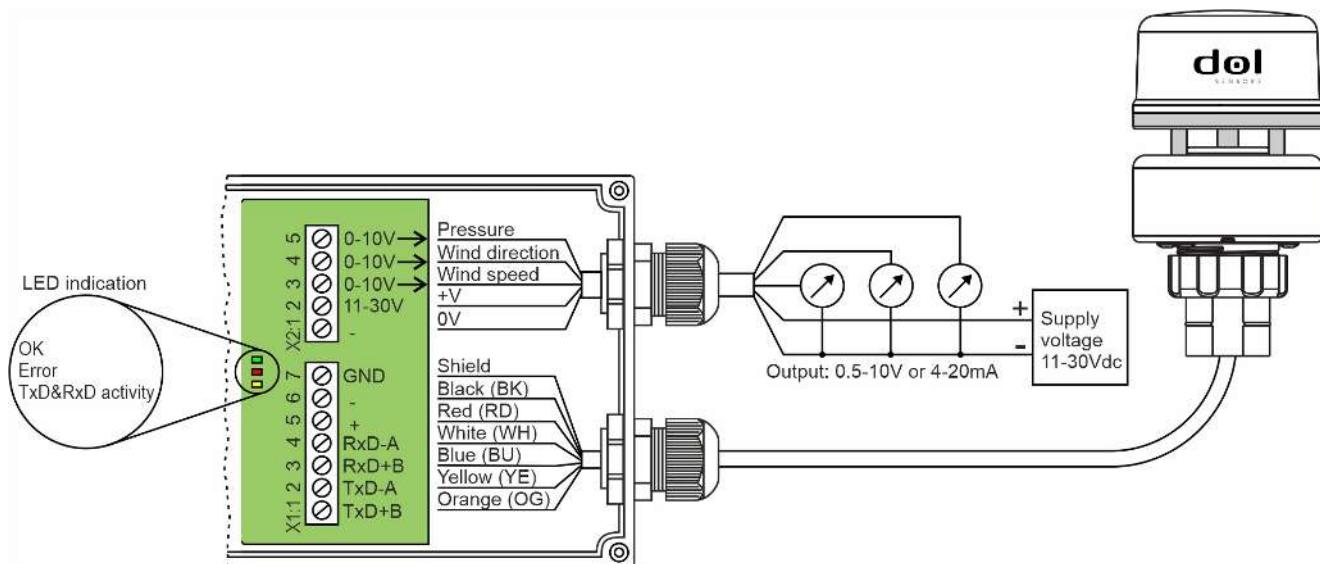


| LED indication | LED designation | DOL 58 status |
|----------------|------------------|--|
| Green ON | OK | Operation OK |
| RED flash | Error | Overvoltage or undervoltage alarm Overloading of output 1-3 |
| Red ON | | Connection error at output 1-3: Voltage output: Load <500Ω Current output: Load. |
| Yellow flash | TxD&RxD activity | TxD/RxD activity |
| Yellow ON | | RxD/TxD error in the communication to the weather sensor |

4 Maintenance

The sensor has no movable parts and thus does not require regular maintenance.

! Possible reduced function can be caused by spider webs, insects or dirt in the wind channel. The wind channel can be cleaned carefully with a damp cloth. During cleaning, it is important not to damage the reflector plate or the protective film in the wind channel, as these are important for optimal function of the weather sensor.

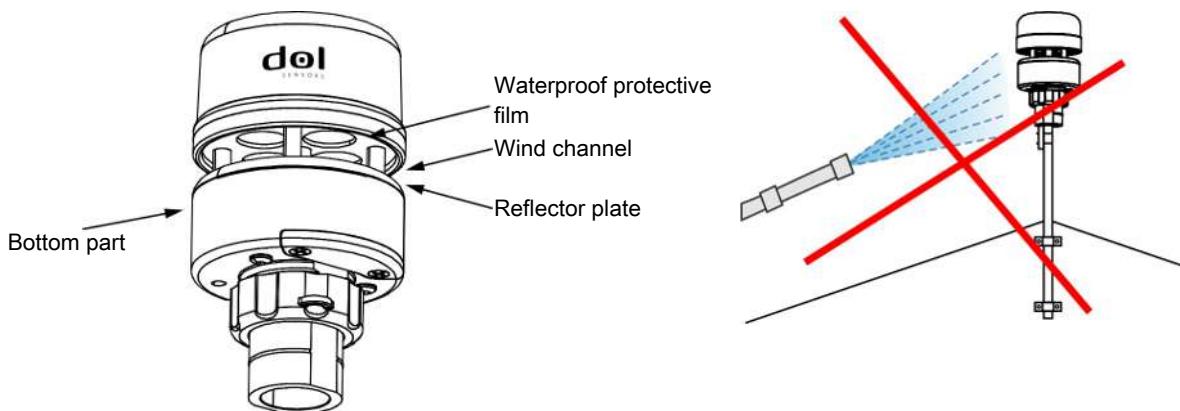


5 Technical data

| Input measuring range | | | Voltage output | | | Current output | |
|------------------------------|-----------------|--|----------------|---|------|---|----|
| Wind speed at 0-55 °C | Measuring range | 0 - 40 | m/s | 0.5 - 10 | VDC | 4 - 20 | mA |
| | Resolution | 0.05 | m/s | 11.88 | mVDC | 20.00 | µA |
| | Accuracy | 0 - 5m/s: 0.50 + 10% of reading | m/s | 0 - 5m/s: 11.88 or 10% of reading | mVDC | 0 - 5m/s: 200 or 10% of reading | µA |
| | | 5 - 40m/s: 1.00 or 5% of reading | m/s | 5 - 40m/s: 23.75 or 5% of reading | mVDC | 5 - 40m/s: 400 or 5% of read- ing | µA |
| Wind direction at 0-55 °C | Measuring range | 0 - 360 | | 0.5 - 10 | VDC | 4 - 20 | mA |
| | Resolution | 0.1 | | 2.63 | mVDC | 4.44 | µA |
| | Accuracy | 2 - 5m/s: 5.00 | | 2 - 5m/s: 131.66 | mVDC | 2 - 5m/s: 222.22 | µA |
| | | >5 m/s: 2.00 | | >5 m/s: 52.67 | mVDC | >5 m/s: 88.89 | µA |
| Barometric pres- sure | Measuring range | 800 - 1100 | hPa | 0.5 - 10 | VDC | 4 - 20 | mA |
| | Resolution | 0.1 | hPa | 3.17 | mVDC | 5.33 | µA |
| | Accuracy | +/- 1.00 | hPa | +/- 31.67 | mVDC | +/- 53.33 | µA |
| Air temperature | Measuring range | -25 - 55 | °C | 0.5 - 10 | VDC | 4 - 20 | mA |
| | Resolution | 0.1 | °C | 11.88 | mVDC | 20.00 | µA |
| | Accuracy | >2 m/s: +/- 1.1 | °C | >2m/s: +/- 130.63 | mVDC | >2m/s: +/- 220.00 | µA |



| Input measuring range | | | | Voltage output | | Current output | | | | | | | | |
|--|--|--|--|---|-----|----------------|--|--|--|--|--|--|--|--|
| Load | | | | 500Ω - 10MΩ Recommended load ≥ 100 kΩ | | See graph | | | | | | | | |
| Output impedance | | | | <1Ω | | n/a | | | | | | | | |
| Output current | | | | <20mA per output (current limited) | | n/a | | | | | | | | |
| Max. Cable length at 0.75mm ² | | 100 | | m | 500 | m | | | | | | | | |
| Max. Cable length at 1.50mm ² | | 200 | | m | 500 | m | | | | | | | | |
| Common | | | | | | | | | | | | | | |
| Supply | Voltage | VDC | 11 - 30 | | | | | | | | | | | |
| | Current | mA | @ 12 V DC Typ. 70mA, max. 130 @ 24 V DC Typ. 50mA, max. 110 | | | | | | | | | | | |
| Temperature, operation | °C | -25 - 55 | | | | | | | | | | | | |
| Shipping weight | kg | 1.9 | | | | | | | | | | | | |
| Shipping dimensions | mm | 380 x 185 x 165 | | | | | | | | | | | | |
| Protection class | IP | Interface box: 65 Weather sensor X6 (Relative humidity/X4) | | | | | | | | | | | | |
| Approval | | CE | | | | | | | | | | | | |
| Mounting | Mast outer diameter Ø 30 to 46 mm (1.18" to 1.81") | | | | | | | | | | | | | |


When the wind speed is less than 2 m/s and the temperature is below 0 °C, the readings will be less accurate.

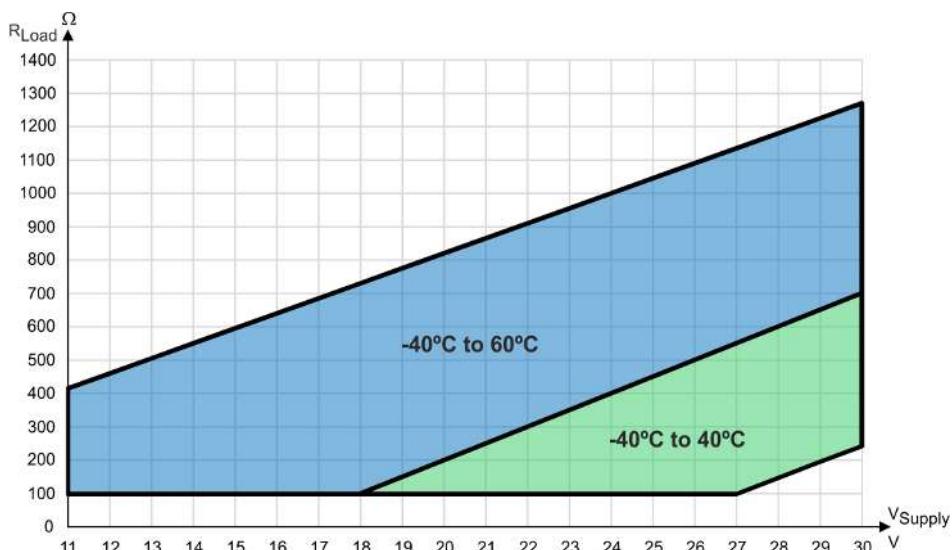

Load resistance and supply voltage.

5.1 Dimensions

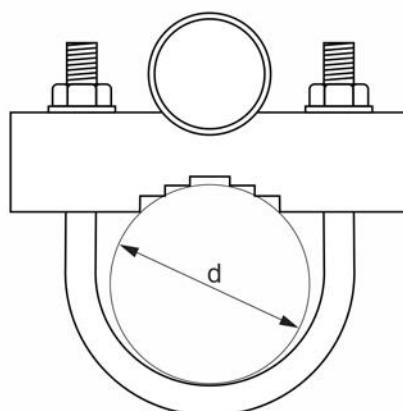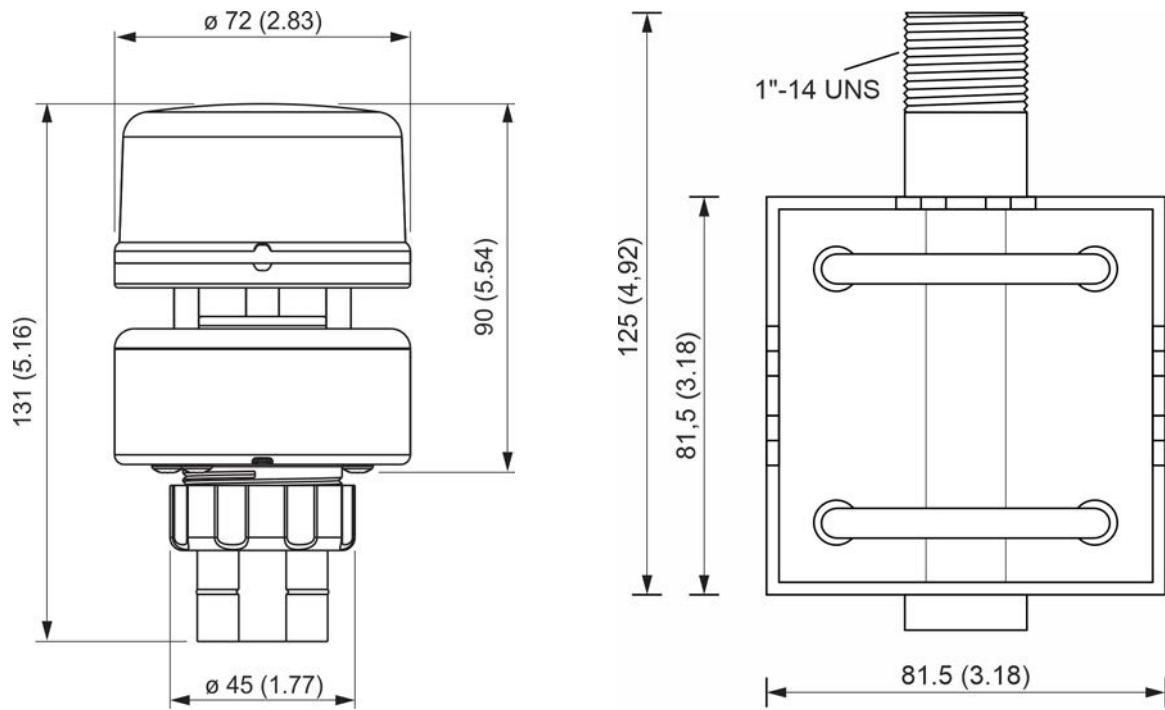

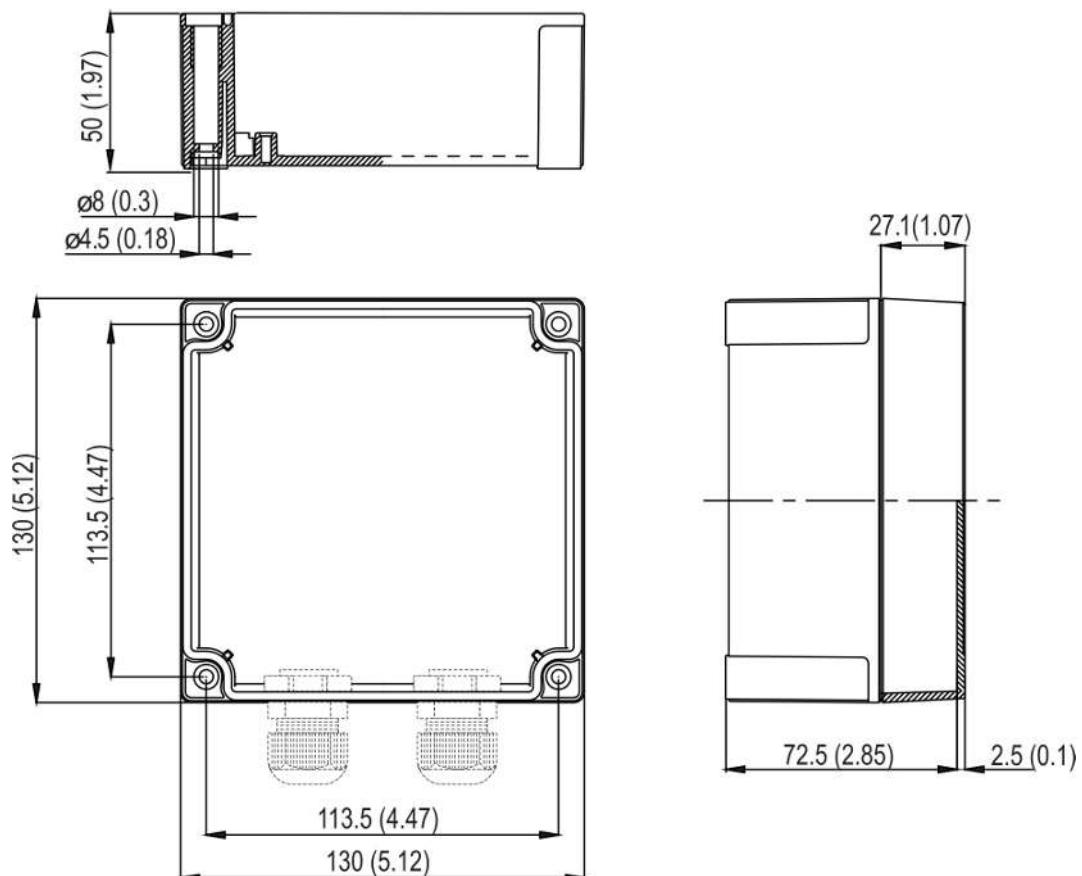

Interface box dimensions.

