


PANAMA

FACTS

321 PANAMA

Anwendungen				
	100 % SDA	DIN 60 001		
	370 g / m ²	DIN EN 12127		
	Note: 100	EN ISO 4920		
	460 mm	DIN EN ISO 811		
	L 1/1	DIN ISO 9354		
	170 daN / 5 cm	DIN EN ISO 13934-1		
	150 daN / 5 cm	DIN EN ISO 13934-1		
	 min. 7/8  min. 4-5/5	DIN EN ISO 105-B04		
	120 cm			
	 min. 7/8	DIN EN ISO 105-B02		
	Konformitätserklärung			
EN 13561				





321 PANAMA




321 010

UV 60




321 325

UV 60

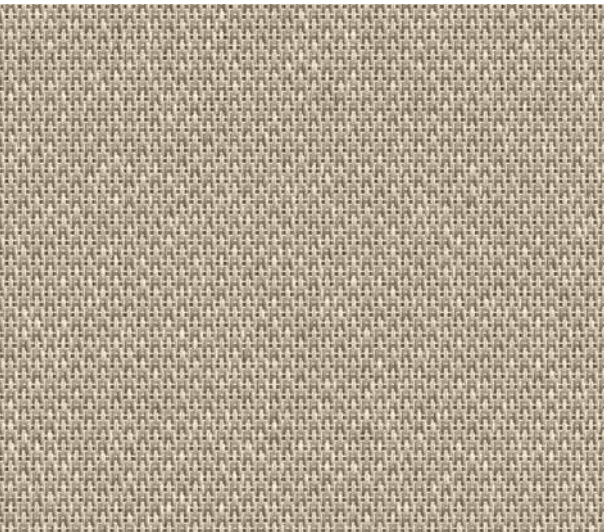


321 780

UV 80

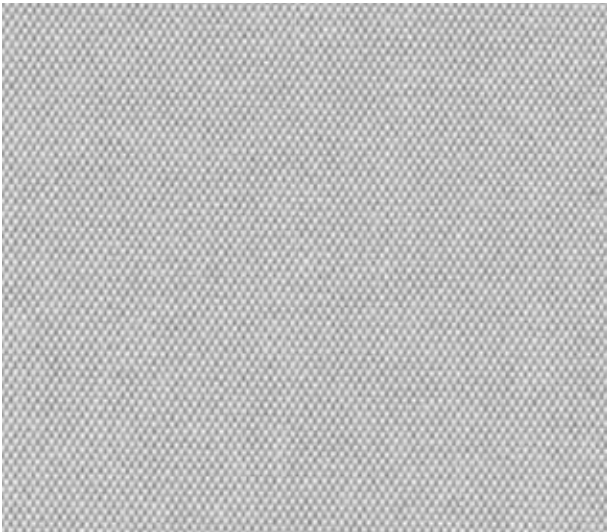


321 030

UV 60

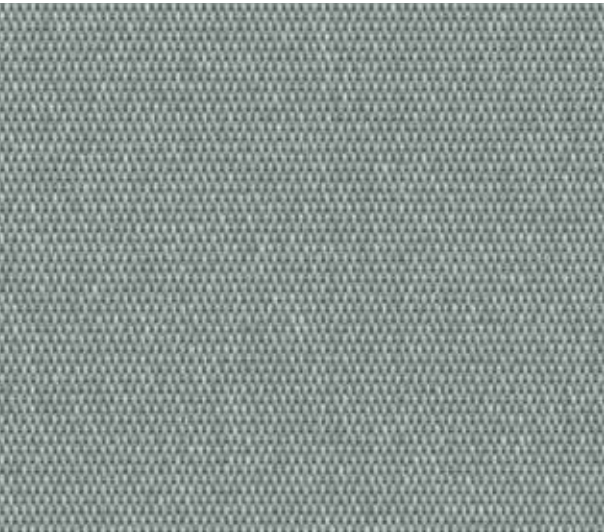


321 D87*

UV 80

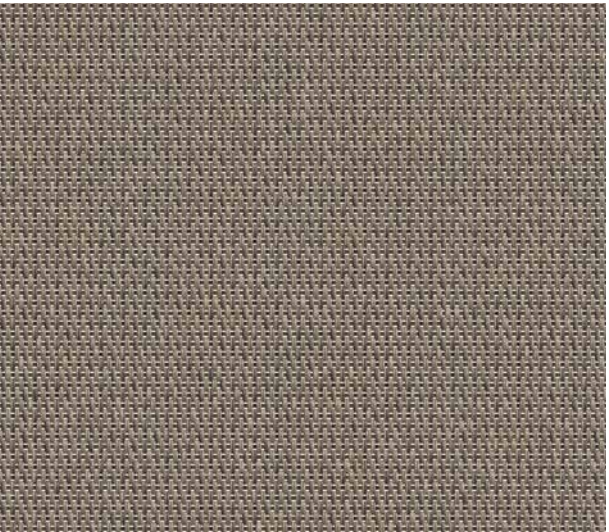

321 083

UV 80

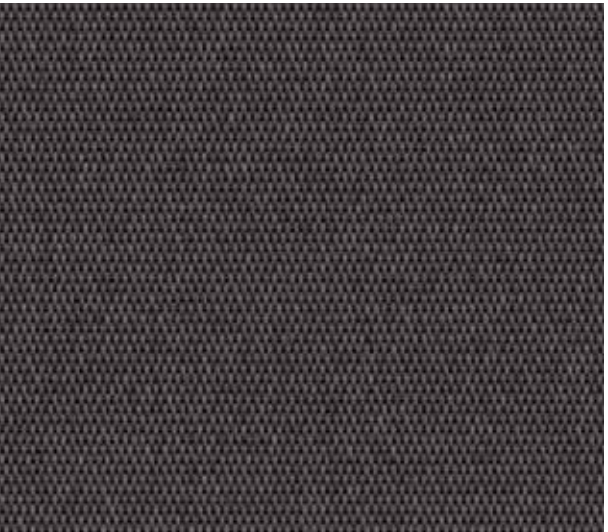

321 398

UV 80