

Product	
Catalog No.	
Fixture Type	Notes



WM202 LED STAIRWELL LIGHT

WM202 is a CCT tunable LED corridor light designed for corner mounting, providing uniform vertical illumination ideal for hallways and walkways. Featuring selectable wattage and CCT, it delivers up to 4,600 lumens at 115 lm/W. With 0-10V dimming, damp location rating, optional sensors, and emergency backup, WM202 ensures energy efficiency, flexibility, and ease of installation in commercial and institutional settings.


APPLICATIONS

- Storage Rooms
- Offices
- Conference Rooms
- Retail
- Reception Areas
- Hallways
- Education Facilities

FEATURES

- Replaces wall mounted lighting and provides direct and indirect illumination
- Adjustable color allows versatile application
- Surge-protected
- Emergency backup battery compatible
- Occupancy sensor compatible

DIMENSIONS

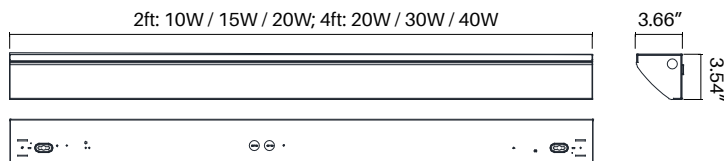

SPECIFICATION SUMMARY

Category	Specification	Data
Category Performance	Wattage	2ft: 10W / 15W / 20W 4ft: 20W / 30W / 40W
	Delivered Lumens	1,150 - 4,600lm
	Lumen Efficacy	115lm/W
	Color Temperature	3500/4000/5000K(Selectable)
	CRI (Ra)	82
Electrical	Input Voltage	AC120-277V / 347-480V
	Dimming	-
	Power Factor	0.95
Physical	Housing	Steel
	Lens Option	Milky lens, Perforated cover, Clear lens, Louver
	Operation Temperature	-4°F to +104°F
	IP Rating	IP20
	Mounting Options	Surface
	Dimensions	2ft: 24.02" × 3.54" × 3.54" 4ft: 48.03" × 3.54" × 3.54"

LIFESPAN AND WARRANTY

Rated Life	50,000 Hrs
Warranty	5 Years
Certification	UL, cUL


CERTIFICATION



WM202 LED STAIRWELL LIGHT

PHOTOMETRY

WM202-04040DVU-CTOS

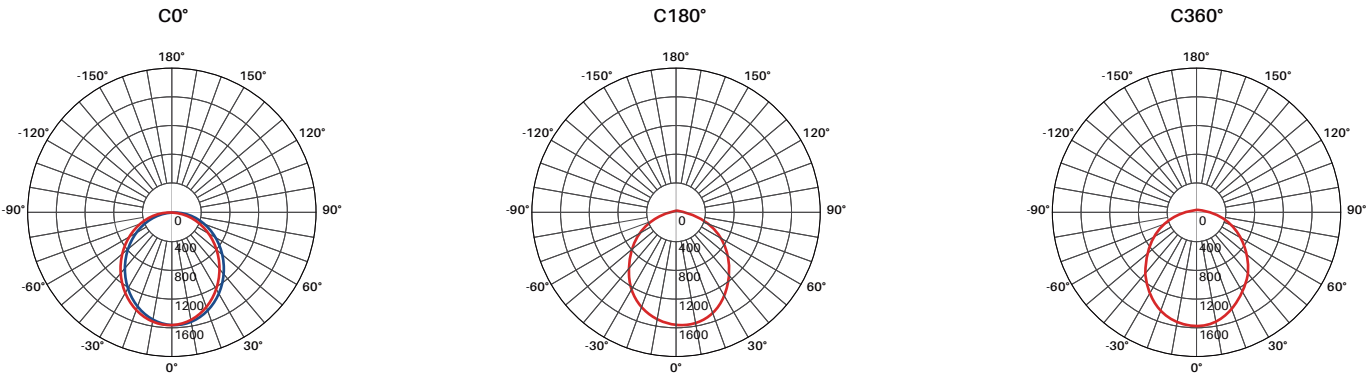

Distribution Curve
C-plane — C0/180 — C90/270

Summary

Category	Details (C0°)
Luminous Flux	4,464.8 lm
Luminous Efficacy	111.6 lm/W
Power Consumption	40 W
Peak Intensity	1,649.3 cd
Light Distribution	Symmetric, downward
Beam Spread Pattern	Wide beam
CCT (Color Temp.)	3500K
Recommended Height	8.2 ft ~ 13.1 ft

PERFORMANCE DATA

2'	PRODUCT CODE	WATTS	lm/W	DELIVERED LUMENS	Input Voltage	CRI (Ra)	CCT
	WM202-02	10/15/20(Selectable)	115	1,150-2,300	AC120-277V	82	3500/4000/5000K(Selectable)

4'	PRODUCT CODE	WATTS	lm/W	DELIVERED LUMENS	Input Voltage	CRI (Ra)	CCT
	WM202-04	20/30/40(Selectable)	115	2,300-4,600	AC120-277V	82	3500/4000/5000K(Selectable)


WM202 LED STAIRWELL LIGHT

MOUNTING OPTIONS



Surface Mount

Accessories

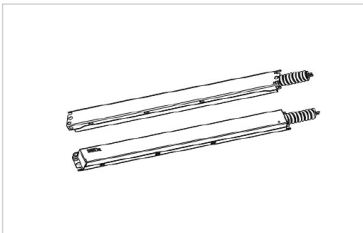

Emergency Backup Battery



Occupancy Motion Sensor

ORDERING INFORMATION

WM202								
Series SKU	Size	Wattage	Dimming	Voltage	CCT	Lens	Mounting (Optional)	Accessories (Optional)
WM202	02: 2ft	020: 10/15/20W (Selectable)	DV: 0-10V Dim *Leave blank if not specified	U: 120-277V H: 347-480V	CT: CCT Selectable (3500/4000/5000K)	M: Milky lens P: Perforated C: Clear lens L: Louver *Leave blank if not specified	SM: Surface Mount	EM: Emergency Battery OS: Occupancy Sensor
	04: 4ft	040: 20/30/40W (Selectable)						

Example: WM202-04040DVU-CTMSM
Lead times will vary depending on options selected.
Consult with your sales representative.

MISCELLANEOUS

CONSTRUCTION:
INSTALLATION:
OPTICS:
LISTINGS:
ELECTRICAL:
GOVERNMENT PROCUREMENT:

NOTE