



WP1301 LED MINI WALL PACK LIGHT

WP1301 is a traditional-style LED wall mount luminaire designed for safety, security, and facility lighting. It delivers 1,600-2,700 lumens with options for clear or frosted lenses and CCT choices of 3000K, 4000K, or 5000K. Built with a tempered UV-coated lens for durability, it offers 0-10V dimming, IP65 wet location rating, and reliable performance from -40°F to +104°F. An optional photocell enables dusk-to-dawn operation.


APPLICATIONS

- General Security
- Pathway
- Perimeter

FEATURES

- Optional photocell compatible
- Tempered UV coated lens provide outstanding performance, uniformity and glare control

DIMENSIONS

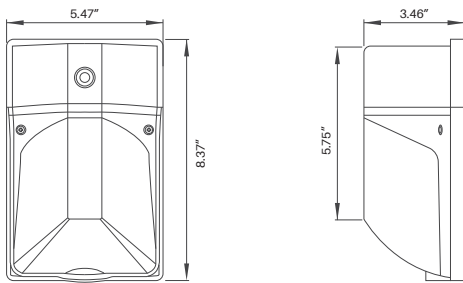

Weight:
15W/17W: 1.852lb
25W: 1.852lb

CERTIFICATION



Product	
Catalog No.	
Fixture Type	Notes

Category	Specification	Data
Category Performance	Wattage	15W, 17W, 25W
	Delivered Lumens	1800 lm; 2000 lm; 2600 lm
	Lumen Efficacy	~120 lm/W
	Color Temperature	3000K/4000K/5000K
	Lens Option	Clear, Frost
	CRI (Ra)	>70
	Beam Angle	75°
Electrical	Input Voltage	AC120-277V
	Dimming	Non-Dimmable
	Power Factor	>0.9
Physical	Housing	Aluminum
	Operation Temperature	-40°F to 104°F
	Dimension	8.37"x5.47"x3.46"
	Mounting Options	Wall
	IP Rating	IP65

LIFESPAN AND WARRANTY

Rated Life	50,000 Hrs
Warranty	5 Years
Certification	UL, cUL, Wet location, DLC Premium

CONTROL OPTIONS



Photocell

WP1301 LED MINI WALL PACK LIGHT


PHOTOMETRY

System Watts	Voltage	Lens	CRI	Lumens (3000K)	LPW (3000K)	Lumens (4000K)	LPW (4000K)	Lumens (5000K)	LPW (5000K)
15W	120-277VAC	Clear	70	1600lm	107 lm/W	1700lm	113 lm/W	175lm	117 lm/W
		Frosted	70	1760lm	117 lm/W	1800lm	120 lm/W	1820lm	121 lm/W
17W	120-277VAC	Clear	70	1800lm	106 lm/W	1900lm	112 lm/W	1950lm	115 lm/W
		Frosted	70	1900lm	112 lm/W	2000lm	118 lm/W	2020lm	119 lm/W
25W	120-277VAC	Clear	70	2500lm	100 lm/W	2550lm	102 lm/W	2600lm	104 lm/W
		Frosted	70	2550lm	102 lm/W	2600lm	104 lm/W	2700lm	108 lm/W


ELECTRICAL DATA

Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage(V)	Current (Amps)
1	250	15	120	0.13
		15	208	0.07
		15	240	0.06
		15	277	0.05
1	250	17	120	0.14
		17	208	0.08
		17	240	0.07
		17	277	0.06
1	430	25	120	0.21
		25	208	0.12
		25	240	0.10
		25	277	0.09

PHOTOMETRY

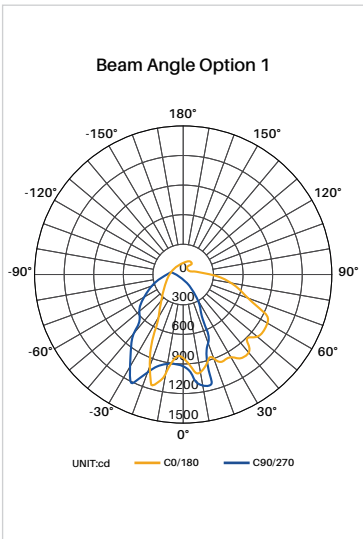

Clear Lens

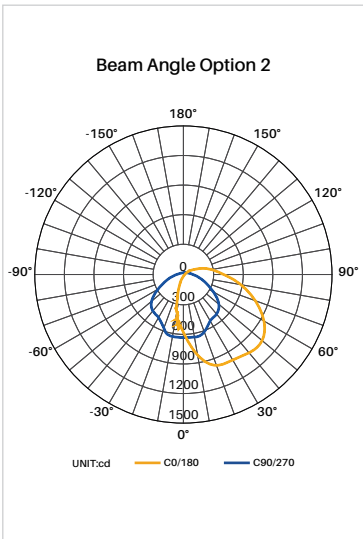

Frosted Lens

WP1301 LED MINI WALL PACK LIGHT

ORDERING INFORMATION

WP1301						
Series SKU	Wattage	Input Voltage	CCT	Lens	Finish	Option (Optional)
WP1301	015: 15W 017: 17W 025: 25W	U:120-277V	30: 3000K 40: 4000K 50: 5000K	C: Clear F: Frost	D: Dark Bronze B: Black W: White	PC: Photocell

Example: WP1301-015U-40CDPC
Lead times will vary depending on options selected.
Consult with your sales representative.

MISCELLANEOUS

NOTE

CONSTRUCTION:
INSTALLATION:
OPTICS:
LISTINGS:
ELECTRICAL:
GOVERNMENT PROCUREMENT: