



## WP1302 LED WALL PACK LIGHT

WP1302 is a rugged LED wall pack with selectable wattage and CCT for field flexibility. Featuring a UV-resistant PC lens, die-cast aluminum housing, and IP-rated sealing, it delivers up to 14,000 lumens with efficacy up to 170 lm/W. Ideal for outdoor lighting, it offers 0-10V dimming, optional photocell, and emergency battery backup. Designed for durability and performance, WP1302 is DLC Premium listed and UL wet location rated.


### APPLICATIONS

- Building Perimeters
- Entrances
- Walkways
- Parking Areas
- Security Lighting
- Warehouses
- Loading Docks

### FEATURES

- Rugged die-cast aluminum housing
- UV-resistant PC lens
- Field-selectable wattage & CCT
- DLC Premium listed
- UL wet location rated

### DIMENSIONS

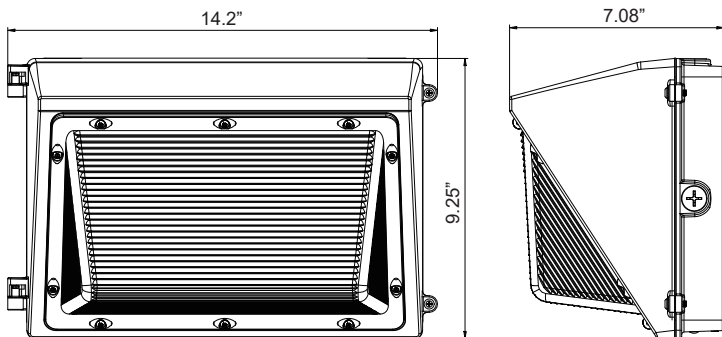

Product	
Catalog No.	
Fixture Type	Notes

### SPECIFICATION SUMMARY

Category	Specification	Data
Category Performance	Wattage	27W/38W/50W/65W(Selectable) 45W/60W/80W/100W(Selectable)
	Delivered Lumens	4,100-13,400lm
	Lumen Efficacy	129-170lm/W
	Color Temperature	3000/4000/5000K(Selectable)
	CRI (Ra)	70
Electrical	Input Voltage	AC120-277V
	Dimming	1-10V
	Power Factor	0.90
Physical	Housing	Aluminum
	Operation Temperature	-40°F to +104°F
	IP Rating	Wet location rated
	Mounting Options	Wall mount
	Dimensions	14.2" x 9.25" x 7.08"

### LIFESPAN AND WARRANTY

Rated Life	50,000 Hrs
Warranty	5 Years
Certification	UL, cUL

### CERTIFICATION



# WP1302 LED WALL PACK LIGHT

Lorem ipsum dolor sit amet,

## CCT AND WATTAGE ADJUSTABLE

65W							
SETTING	SYSTEM WATTS	3000K		4000K		5000K	
		LUMENS (70CRI)	LPW(70CRI)	LUMENS (70CRI)	LPW(70CRI)	LUMENS	LPW(70CRI)
100%	65W	8600lm	132 lm/W	9500lm	146 lm/W	9000lm	138 lm/W
80%	50W	6900lm	138 lm/W	7600lm	152 lm/W	7200lm	144 lm/W
60%	38W	5500lm	145 lm/W	6200lm	163 lm/W	5700lm	150 lm/W
40%	27W	4100lm	152 lm/W	4600lm	170 lm/W	4200lm	156 lm/W

100W							
SETTING	SYSTEM WATTS	3000K		4000K		5000K	
		LUMENS (70CRI)	LPW(70CRI)	LUMENS (70CRI)	LPW(70CRI)	LUMENS (70CRI)	LPW(70CRI)
100%	100W	12900lm	129 lm/W	14000lm	140 lm/W	13400lm	134 lm/W
80%	80W	10800lm	135 lm/W	11800lm	148 lm/W	11200lm	140 lm/W
60%	60W	8400lm	140 lm/W	9300lm	155 lm/W	8800lm	147 lm/W
40%	45W	6600lm	147 lm/W	7400lm	164 lm/W	7000lm	156 lm/W

## ELECTRICAL DATA


Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	1110	65	120	0.54
		65	208	0.31
		65	240	0.27
		65	277	0.23
1	2500	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36

## PERFORMANCE DATA

PRODUCT CODE	WATTS	lm/W	DELIVERED LUMENS	Input Voltage	CRI (Ra)	CCT
WP1302	27W/38W/50W/65W(Selectable)	132-170	4,100-9,000	AC120-277V	70	3000/4000/5000K(Selectable)
WP1302	45W/60W/80W/100W(Selectable)	129-164	6,600-13,400	AC120-277V	70	3000/4000/5000K(Selectable)

# WP1302 LED WALL PACK LIGHT

## PHOTOMETRICS

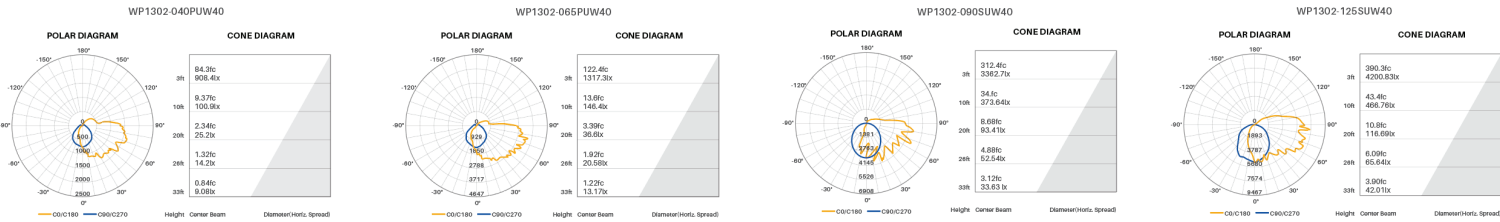

## Accessories



Emergency Backup Battery



Photocell

## ORDERING INFORMATION

WP1302						
Series SKU	Wattage	Dimming	Voltage	CCT	Housing	Accessories (Optional)
WP1302	<b>065:</b> 27/38/50/65W (Selectable) <b>100:</b> 45/60/80/100W (Selectable)	<b>DV:</b> 1-10V Dim  * Leave blank if not specified	<b>U:</b> 120-277V	<b>CT:</b> CCT Selectable (3000/4000/5000K)	<b>D:</b> Dark Bronze <b>B:</b> Black <b>W:</b> White	<b>EM:</b> Emergency Battery <b>PH:</b> Photocell

Example: WP1302-065DVU-CTD  
Lead times will vary depending on options selected.  
Consult with your sales representative.

## MISCELLANEOUS

CONSTRUCTION:  
INSTALLATION:  
OPTICS:  
LISTINGS:  
ELECTRICAL:  
GOVERNMENT PROCUREMENT:

## NOTE