

Product	
Catalog No.	
Fixture Type	Notes



## WP2002 LED MINI WALL PACK

The WP2002 is a compact LED mini wall pack designed for reliable outdoor illumination with excellent energy efficiency. Using high-performance LED chips and an integrated photocell option, it provides automatic dusk-to-dawn operation and selectable color temperature for added flexibility. Its durable polycarbonate housing and IP65 protection ensure long-lasting performance, making it ideal for security lighting, hallways, stairwells, and residential or commercial building exteriors.

### SPECIFICATION SUMMARY

Category	Specification	Data
Category Performance	Wattage	15W, 20W (Optional)
	Delivered Lumens	1,800~2,400lm
	Lumen Efficacy	120lm/W
	Color Temperature	27K/30K/35K/40K/50K (Selectable)
	CRI (Ra)	80+
Electrical	Input Voltage	120V
	Power Factor	>0.8
Physical	Housing	Polycarbonate
	Beam Angle	100°
	Operation Temperature	-4°F to +113°F
	IP Rating	IP 65
	IK Rating	IK 08
	Surge protector	1kv
	Mounting Options	Wall Mount
	Dimension (L × W × H)	5.32 × 8.86 × 2.36

### APPLICATIONS

- Security and Perimeter Lighting
- Entryways & Stairwells
- Hallways & Corridors
- Outdoor Commercial Buildings
- Outdoor Residential Areas


### LIFESPAN AND WARRANTY

Rated Life	50,000 Hrs
Warranty	3 Years
Certification	ETL

### FEATURES

- Field-adjustable 5CCT (2700K-5000K)
- Optional photocell ON/OFF for dusk-to-dawn control
- High efficacy up to 120 lm/W
- Durable polycarbonate housing with IP65 protection
- Quick installation with hinge-type rotating shaft design
- Optical polycarbonate lens minimizing glare and light pollution

### CERTIFICATION



CCT Selectable

Up to IKV

IK08

IP65


# WP2002 LED MINI WALL PACK

## PERFORMANCE DATA

PRODUCT CODE	WATTS	DELIVERED LUMENS	BEAM ANGLE	INPUT VOLTAGE	DIM	CCT
WP2002	15	1800	100°	AC120	Triac	2700K, 3000K, 3500K
WP2002	20	2400	100°	AC120	Triac	4000K, 5000K (Selectable)

\*All above efficacy and lumens are subject to CRI>80 @4000K please check IES files for accurate data.

## DIMENSION

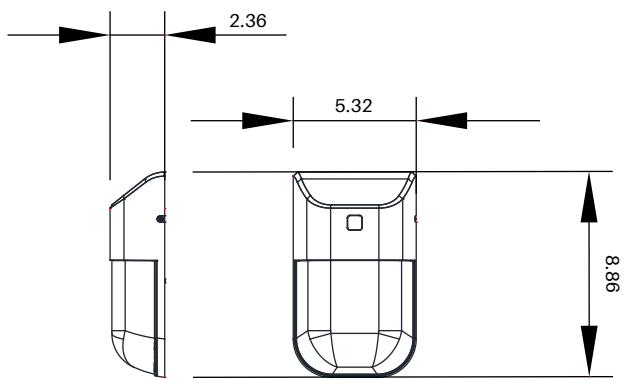

Photocell dusk to dawn



Polycarbonate housing



Field-adjustable CCT  
5CCT Selectable:  
27K/30K/35K/40K/50K



Photocell On/Off

Optical polycarbonate lens



Unique hinge rotating shaft design  
Make the installation convenient and quick and  
can be installed by one person.

## ORDERING INFORMATION

WP2002					
Series SKU	Wattage	Dimming	Input Voltage	CCT	HOUSING COLOR
WP2002	015: 15W 020: 20W	DT: Triac dimming	U: 120V	CT: CCT Selectable (27K/30K/35K/40K/50K)	D: Bronze B: Black W: White

Factory default settings for **Photocell** is ON.

Example: WP2002-015DTU-CTB

Lead times will vary depending on options selected.  
Consult with your sales representative.

## MISCELLANEOUS

CONSTRUCTION:

INSTALLATION:

OPTICS:

LISTINGS:

ELECTRICAL:

GOVERNMENT PROCUREMENT:

## NOTE

In a continuing effort to offer the highest quality product to our customers,  
we reserve the right to change the product specifications without notice.