

Product	
Catalog No.	
Fixture Type	Notes



WP2001 LED ROUND HIGH BAY LIGHT

The WP2001 LED Full-Cutoff Wall Pack is designed for efficient and compliant outdoor wall-mounted lighting applications. Featuring a full cut-off optical design, it minimizes glare while delivering uniform downward illumination. The fixture offers field-selectable wattage and CCT options, allowing flexible configuration to meet various project requirements. With durable die-cast aluminum construction and IP65 weatherproof rating, WP2001 provides long-lasting performance, energy efficiency, and reliable operation in demanding outdoor environments.

APPLICATIONS

- Factory
- Warehouse
- Walkways
- Hallways
- Outdoor Commercial
- Outdoor Residential

FEATURES

- Full cut-off optical design for glare control
- Field-adjustable wattage (4 levels selectable)
- Field-adjustable CCT (3000K / 4000K / 5000K)
- Die-cast aluminum housing for excellent heat dissipation
- Dusk-to-dawn photocell ON/OFF control

SPECIFICATION SUMMARY

Category	Specification	Data
Category Performance	Wattage	9": 40/30/20/15W (Selectable) 9": 80/60/50/40W (Selectable) 11": 80/60/50/40W (Selectable) 11": 120/100/90/60W (Selectable)
	Delivered Lumens	18,000 lm
	Lumen Efficacy	150 lm/W
	Color Temperature	3000K / 4000K / 5000K
	CRI (Ra)	>80
	Beam Angle	Type III
Electrical	Input Voltage	120-277VAC / 120-347VAC
	Dimming	0-10V
	Power Factor	>0.9
Physical	Housing	Die-cast aluminum
	Operation Temperature	-40°F to 122°F
	Dimension	9": 8.7" × 5.6" × 8.0" 11": 11.0" × 7.2" × 9.2"
	Mounting Options	Wall
	IP Rating	IP65
	Surge Protection	L/N 6KV, L/N-P 6KV L/N 4KV, L/N-P 6KV for 40W

LIFESPAN AND WARRANTY


Rated Life	50,000 Hrs
Warranty	5 Years
Certification	UL, DLC Premium

CERTIFICATION





WP2001 LED ROUND HIGH BAY LIGHT


DIMENSIONS



9"

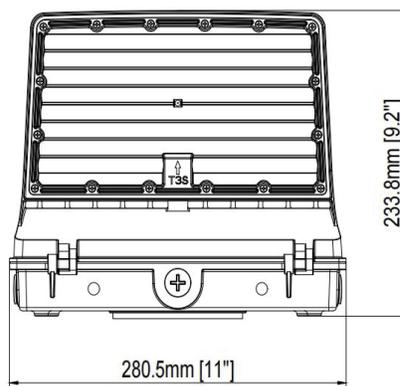

11"

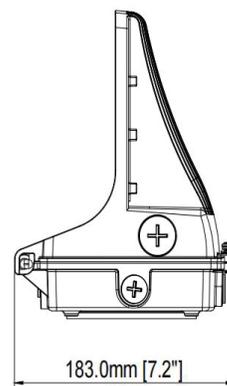

ACCESSORIES



Glare Shield




Microwave Motion Sensor



Bluetooth Microwave Motion Sensor



Plug-in Microwave Motion Sensor

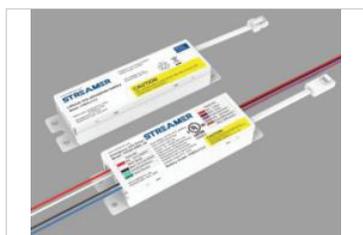

Emergency driver

WP2001 LED ROUND HIGH BAY LIGHT

ORDERING INFORMATION

Series SKU	Size	Wattage	Input Voltage	CCT	Housing	Option (Optional)
WP2001	09: 9" 11: 11"	015: 40/30/20/15W(Selectable) 040: 80/60/50/40W(Selectable) 040: 80/60/50/40W(Selectable) 060: 120/100/90/60W(Selectable)	U:120-277V H:120-347V	CT: CCT Selectable (30/40/50K)	D: Dark Bronze B: Black C: Customized	GS: Glare Shield PM: Plug-in Microwave Motion Sensor BM: Bluetooth Microwave Motion Sensor MS: Microwave Motion Sensor EM: Emergency driver

Example: WP2001-09040U-CTDGS

Lead times will vary depending on options selected.
Consult with your sales representative.

MISCELLANEOUS

CONSTRUCTION:
INSTALLATION:
OPTICS:
LISTINGS:
ELECTRICAL:
GOVERNMENT PROCUREMENT:

NOTE