

Product	
Catalog No.	
Fixture Type	Notes



## SPECIFICATION SUMMARY

Category	Specification	Data
Category Performance	Wattage	40/30/20/15W (Selectable)
		80/60/50/40W (Selectable)
		120/100/90/60W (Selectable)
	Delivered Lumens	-18,000lm
	Lumen Efficacy	-150lm/W
Electrical	Color Temperature	3000K / 4000K /5000K (Selectable)
	CRI (Ra)	80+
	Input Voltage	120-277V / 120-347V
	Dimming	0-10V
	Power Factor	≥ 0.9
Physical	Housing	Die-cast aluminum housing
	Operation Temperature	-40°F to +122°F / 32°F to 104°F (With EM)
	IP Rating	IP 65
	Mounting Options	Wall Mount
	Dimension	13" × 6.5" × 6.7"
	Surge Protection	L/N 6KV, L/N-PE 6KV L-N/L&N-PE: 4+6KV (120-277V, 40W)

## WP2033 LED WALL PACK

The LED wall pack is an ideal solution for wall-mounted lighting projects. Three geometric shapes are available for different environments. A 4-in-1 switch allows selection of lighting direction, CCT, wattage, and photocell ON/OFF control. The D2D photocell can automatically turn off at sunrise or during the day and automatically light up at sunset or at night. It is a highly efficient and energy-saving lighting solution designed for long-lasting performance.

### APPLICATIONS

- Walkways & pathways
- Parking areas
- Landscape lighting
- Outdoor commercial buildings
- Outdoor residential areas


### FEATURES

- 4 wattages selectable
- AC120-277V & AC120-347V options
- DIP switch for UP & DOWN / DOWN lighting modes
- Die-cast aluminum housing for excellent heat dissipation
- Dusk-to-dawn photocell (ON/OFF selectable)


### LIFESPAN AND WARRANTY

Rated Life	50,000 Hrs
Warranty	5 Years
Certification	UL

### CERTIFICATION



### DIMENSION

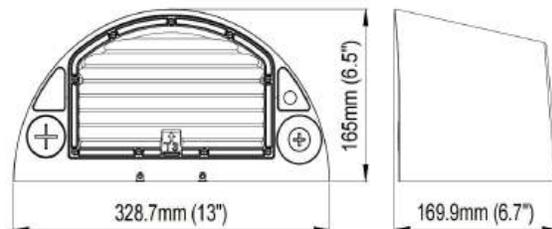

# WP2033 LED WALL PACK

## PERFORMANCE DATA

PRODUCT CODE	SIZE	WATTS	DELIVERED LUMENS	VOLTAGE	DIM	CCT
WP2033	13"	40/30/20/15W (Selectable)	7,500	AC120-277V	0-10V	3000K, 4000K, 5000K (Selectable)
WP2033	13"	80/60/50/40W (Selectable)	12,000			
WP2033	13"	120/100/90/60W (Selectable)	18,000	AC120-347V		

- All above efficacy and lumens are subject to CRI>80 @4000K, please check IES files for accurate data.
- Factory default settings: Photocell is ON, lighting direction is full, max wattage, highest CCT.

## ACCESSORIES



Microwave motion sensor



Plug-in Microwave Motion Sensor



Emergency driver  
4W for 40W fixture, 8W for 80W fixture,  
not available for 120W fixture.



Remote controller

## ORDERING INFORMATION

Series SKU	Wattage	Input Voltage	CCT	ACCESSORIES
WP2033	<b>040:</b> 40/30/20/15W (Selectable) <b>080:</b> 80/60/50/40W (Selectable) <b>120:</b> 120/100/90/60W (Selectable)	<b>U:</b> 120-277V <b>H:</b> 120-347V	<b>CT:</b> CCT Selectable (30K/40K/50K)	<b>MS:</b> Microwave Sensor <b>BS:</b> Bluetooth Microwave Sensor <b>PS:</b> Plug-in Microwave Motion Sensor <b>PB:</b> Plug-in Bluetooth Microwave Motion Sensor <b>EM:</b> Emergency driver <b>RC:</b> Remote controller

Example: WP2033-040U-CTMS  
Lead times will vary depending on options selected.  
Consult with your sales representative.

## MISCELLANEOUS

CONSTRUCTION:  
INSTALLATION:  
OPTICS:  
LISTINGS:  
ELECTRICAL:  
GOVERNMENT PROCUREMENT:

## NOTE