

Product	
Catalog No.	
Fixture Type	Notes

SPECIFICATION SUMMARY

Category	Specification	Data
Category Performance	Wattage	40/30/20W (Selectable)
		60/40/30W (Selectable)
		80/60/40W (Selectable)
		100/80/60W (Selectable)
		120/100/80W (Selectable)
	150/120/100W (Selectable)	
	Delivered Lumens	-18,750lm
	Lumen Efficacy	-150lm/W
	Color Temperature	3000K / 4000K / 5000K (Selectable)
	CRI (Ra)	70+
Electrical	Input Voltage	120-277V / 120-347V
	Dimming	0-10V
	Power Factor	≥ 0.9
Physical	Housing	Die-cast aluminum housing
	Operation Temperature	-40°F to +113°F / -40°F to 104°F (Only 150W)
	IP Rating	IP 65
	Mounting Options	Wall Mount
	Dimension	14.4" × 9.3" × 6.1"
	Surge Protection	L/N 6KV, L/N-P 6KV L/N 4KV, L/N-P 6KV (40W, 60W, 120-277V only)



WP2018 LED WALL PACK

WP2018 LED Wall Pack Light is a high-performance outdoor luminaire designed for commercial and industrial applications. Featuring field-selectable wattage, CCT, and photocell ON/OFF control, WP2018 provides maximum flexibility for various project requirements. The robust ADC12 die-cast aluminum housing and IP65-rated construction ensure long-lasting durability in wet locations. With high lumen efficacy and easy wall mounting, WP2018 is an ideal solution for reliable and energy-efficient exterior lighting.

APPLICATIONS

- Walkways & pathways
- Parking areas
- Landscape lighting
- Outdoor commercial buildings
- Outdoor residential areas


FEATURES

- Motion sensor optional
- 3 CCT selectable (3000K / 4000K / 5000K)
- 3 Wattages selectable
- ON/OFF Photocell selectable
- ADC12 Aluminum Die Casting housing for excellent heat dissipation


LIFESPAN AND WARRANTY

Rated Life	50,000 Hrs
Warranty	5 Years
Certification	UL

CERTIFICATION



DIMENSION

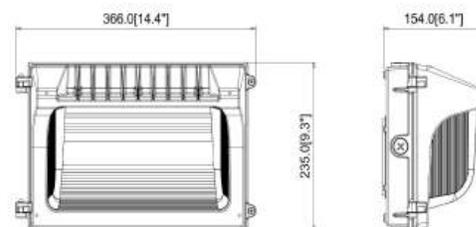

WP2018 LED WALL PACK

PERFORMANCE DATA

PRODUCT CODE	WATTS	DELIVERED LUMENS	VOLTAGE	DIM	CCT
WP2018	40/30/20W (Selectable)	5,000	AC120-277V AC120-347V	0-10V	3000K, 4000K, 5000K (Selectable)
WP2018	60/40/30W (Selectable)	7,500			
WP2018	80/60/40W (Selectable)	10,000			
WP2018	100/80/60W (Selectable)	12,500			
WP2018	120/100/80W (Selectable)	15,000			
WP2018	150/120/100W (Selectable)	18,750			

1. All above efficacy and lumens are subject to 5000K, please check IES files for accurate data.
 2. CCT & Power Selectable models ship preset at the highest CCT and the highest wattage. Factory default settings for Photocell is ON.



ORDERING INFORMATION

Series SKU	Wattage	Input Voltage	CCT	ACCESSORIES
WP2018	040: 40/30/20W (Selectable) 060: 60/40/30W (Selectable) 080: 80/60/40W (Selectable) 100: 100/80/60W (Selectable) 120: 120/100/80W (Selectable) 150: 150/120/100W (Selectable)	U: 120-277V H: 120-347V	CT: CCT Selectable (30K/40K/50K)	MS: Microwave Motion Sensor PC: Photocell

Example: WP2018-040U-CT
 Lead times will vary depending on options selected.
 Consult with your sales representative.

MISCELLANEOUS

CONSTRUCTION:
 INSTALLATION:
 OPTICS:
 LISTINGS:
 ELECTRICAL:
 GOVERNMENT PROCUREMENT:

NOTE