

Product	
Catalog No.	
Fixture Type	Notes



CL702 CANOPY LIGHT

CL702 LED Garage Light features a concise and modern appearance with a lightweight structural design. The uplight structure effectively eliminates the “cave effect” commonly caused by traditional parking garage luminaires, creating a brighter and more comfortable environment. It is ideal for applications requiring enhanced visual comfort and uniform illumination.

APPLICATIONS

- Indoor Parking Areas
- Garages
- Basements
- Commercial Parking Structures
- Utility Rooms

FEATURES

- ADC12 die-cast aluminum housing with excellent heat dissipation
- Up to 165 lm/W high efficacy
- 3 CCT selectable (3000K / 4000K / 5000K)
- 4 power selectable options (depending on model)
- Uplight function standard (5-10% uplight output)


SPECIFICATION SUMMARY

Category	Specification	Data
Category Performance	Wattage	25/19/13/7.5W(Selectable)
		40/30/20/12W(Selectable)
		60/45/30/18W(Selectable)
		80/60/40/24W(Selectable)
		100/75/50/30W(Selectable)
	Delivered Lumens	~16,500lm
	Lumen Efficacy	165lm/W
	Color Temperature	3000K/4000K/5000K (Selectable)
	CRI (Ra)	70+
Electrical	Input Voltage	120-277V / 120-347V
	Dimming	0-10V
	Power Factor	>0.90
Physical	Surge Protection	4kV line-line, 6kV line-earth
	Housing	Aluminum alloy
	Lens Options	Polycarbonate optical lens
	Operation Temperature	-22°F to +122°F
	IP Rating	IP65
	IK Rating	IK08
	Mounting Options	Surface, Conduit
	Dimension (L x W x H)	25W / 40W / 60W: Ø10.7" x 3" 80W / 100W: Ø12.7" x 3.3"

LIFESPAN AND WARRANTY


Rated Life	50,000 Hrs
Warranty	5 Years
Certification	ETL

CERTIFICATION




CL702 CANOPY LIGHT

PHOTOMETRICS

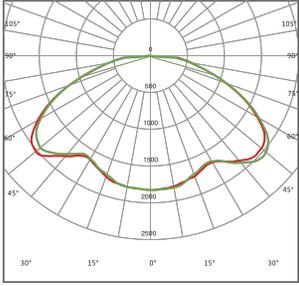


25W/40W/60W beam angle

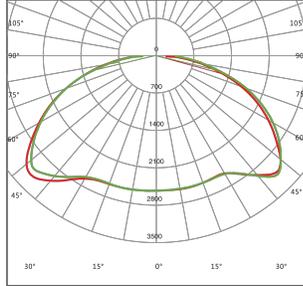




80W/100W beam angle

DIMENSION

25W/40W/60W

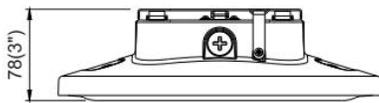

80W/100W

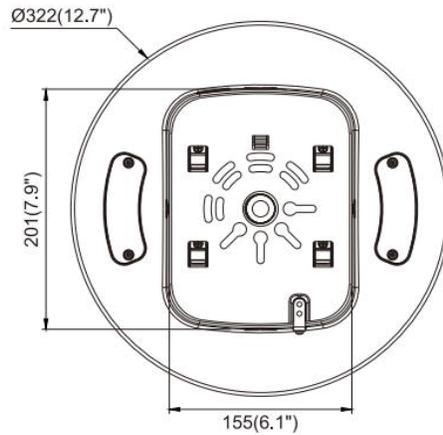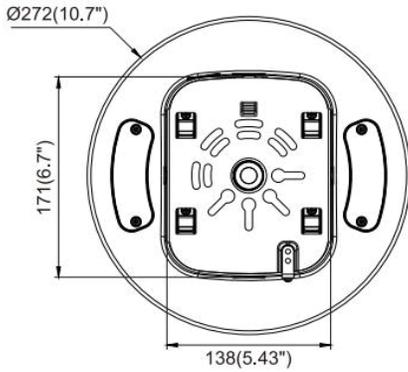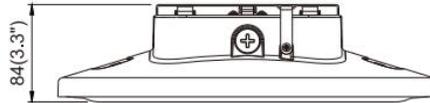

MOUNTING OPTIONS



Surface mounting



Conduit mounting

CL702 CANOPY LIGHT


ACCESSORIES



Motion sensor



PIR sensor

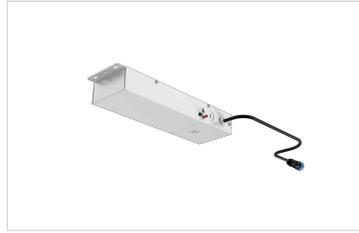

Emergency kit

ORDERING INFORMATION

Series SKU	Wattage	Input Voltage	CCT	Mounting	Option (Optional)
CL702	025: 25/19/13/7.5W(Selectable) 040: 40/30/20/12W(Selectable) 060: 60/45/30/18W(Selectable) 080: 80/60/40/24W(Selectable) 100: 100/75/50/30W(Selectable)	U: 120-277V H: 120-347V	CT: CCT Selectable (3000/4000/5000K)	S: Surface C: Conduit	MS: Motion Sensor PS: PIR Sensor EM: Emergency driver

Example: CL702-040U-CTSEM
 Lead times will vary depending on options selected.
 Consult with your sales representative.

MISCELLANEOUS

CONSTRUCTION:
 INSTALLATION:
 OPTICS:
 LISTINGS:
 ELECTRICAL:
 GOVERNMENT PROCUREMENT:

NOTE