


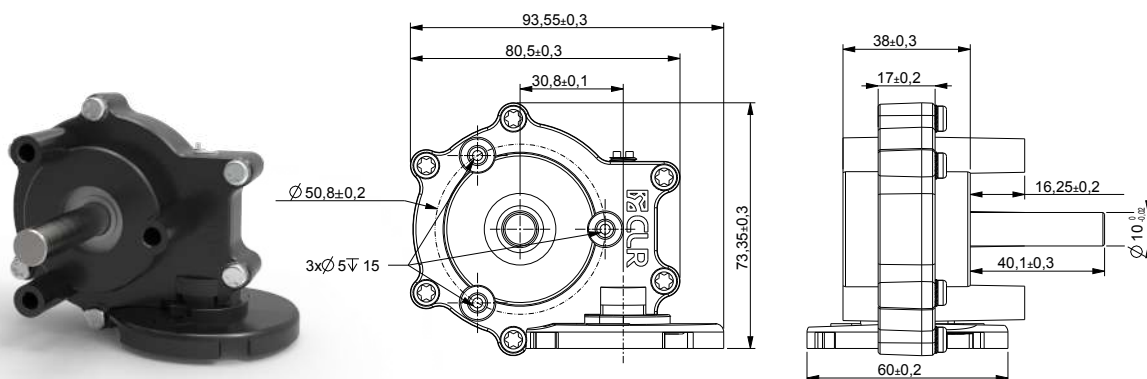


GENERAL SPECIFICATIONS

Gear Reducer:	Worm Gear
Output Shaft:	Steel
Output Shaft Support:	Ball Bearing
Maximum Radial Load (10 mm from flange):	200 N
Maximum Allowable Axial Load:	80 N
Gear and Output Shaft Material:	Steel and POM
Housing and Cover:	PA6 + 30% Glass Fiber
Operating Torque:	Up to 4.5 N·m

TYPICAL RATIOS

4,5:1
26,5:1
69:1

MOTOR COMPATIBILITY: Brushless, steppers and DC

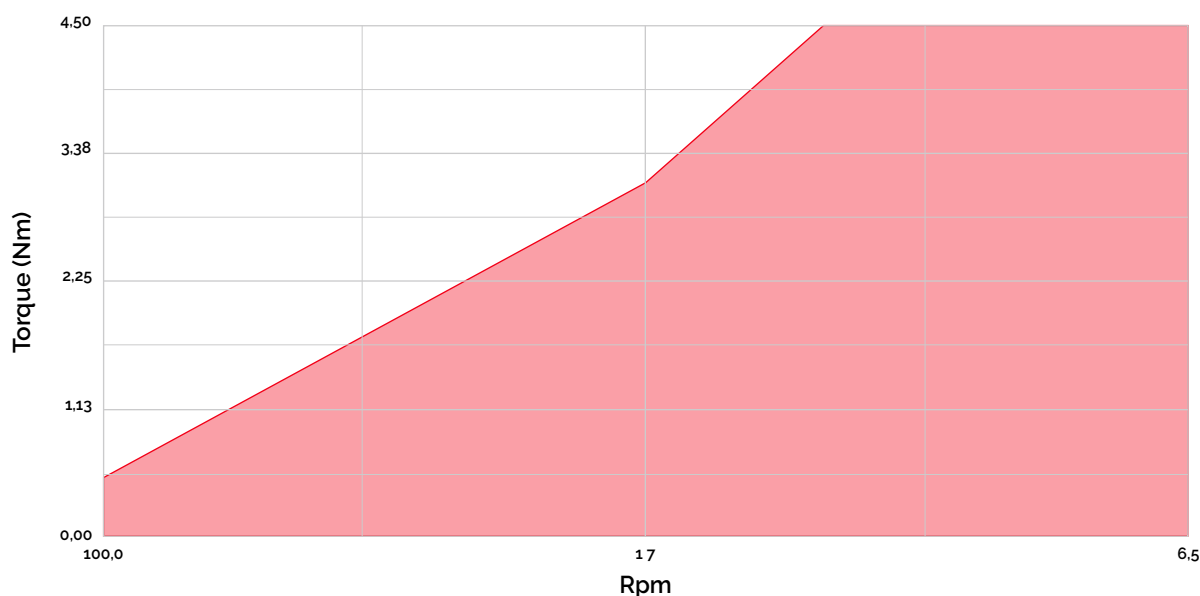

GEAR BOX OPTIONS:

We are manufacturers and offer customization options tailored to your needs.

