


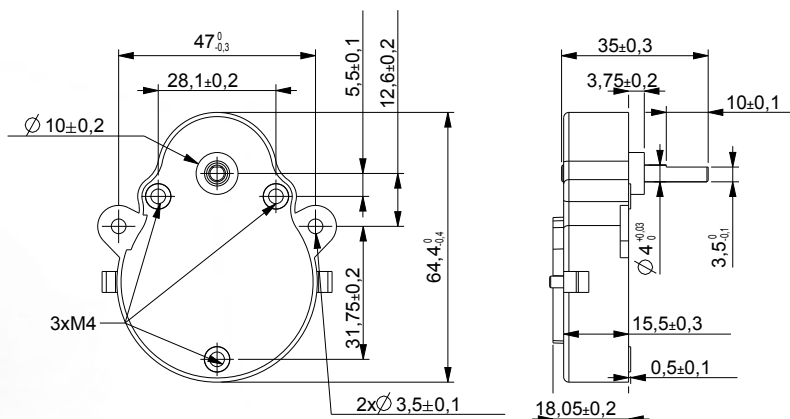


GENERAL SPECIFICATIONS

Gear Reducer:	Spur
Output Shaft:	Steel
Output Shaft Support:	Sintered Bushing
Maximum Radial Load (5 mm from flange):	10 N
Maximum Allowable Axial Load:	20 N
Gear and Output Shaft Material:	Steel
Gear Support:	Hardened and Ground Steel Shafts
Housing and Cover:	Zamak
Operating Torque:	Up to 0.5 N·m
Mounting:	Available with various mounting points

TYPICAL RATIOS

10:1	78:1
21:1	89:1
25:1	152:1
30:1	203:1
38:1	300:1
48:1	500:1

MOTOR COMPATIBILITY: Brushless, steppers, AC and DC

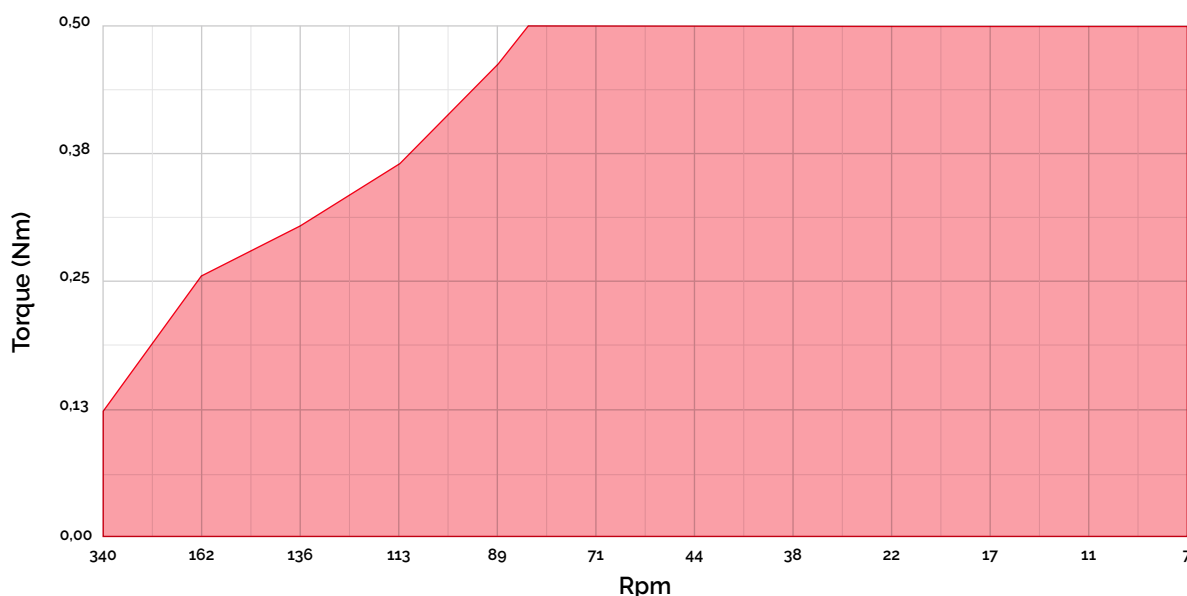

GEAR BOX OPTIONS:

We are manufacturers and offer customization options tailored to your needs.

