
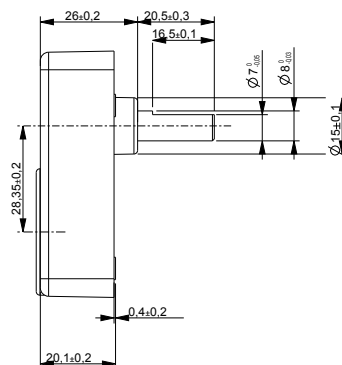


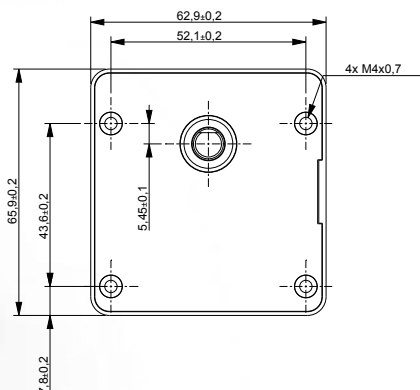


GENERAL SPECIFICATIONS

Gear Reducer:	Spur
Output Shaft:	Steel
Output Shaft Bearing:	Sintered Bushing
Maximum Radial Load (8 mm from flange):	130 N
Maximum Allowable Axial Load:	80 N
Gear and Output Shaft Material:	Steel
Gear Support:	Hardened and Ground Steel Shafts
Housing and Cover:	Zamak
Operating Torque:	Up to 2 N·m

TYPICAL RATIOS

15,25:1	133:1
17:1	220:1
28,1:1	319:1
37,63:1	399,5:1
43,5:1	572:1
63:1	764,4:1
97,5:1	1583:1

MOTOR COMPATIBILITY: Brushless, steppers, AC and DC

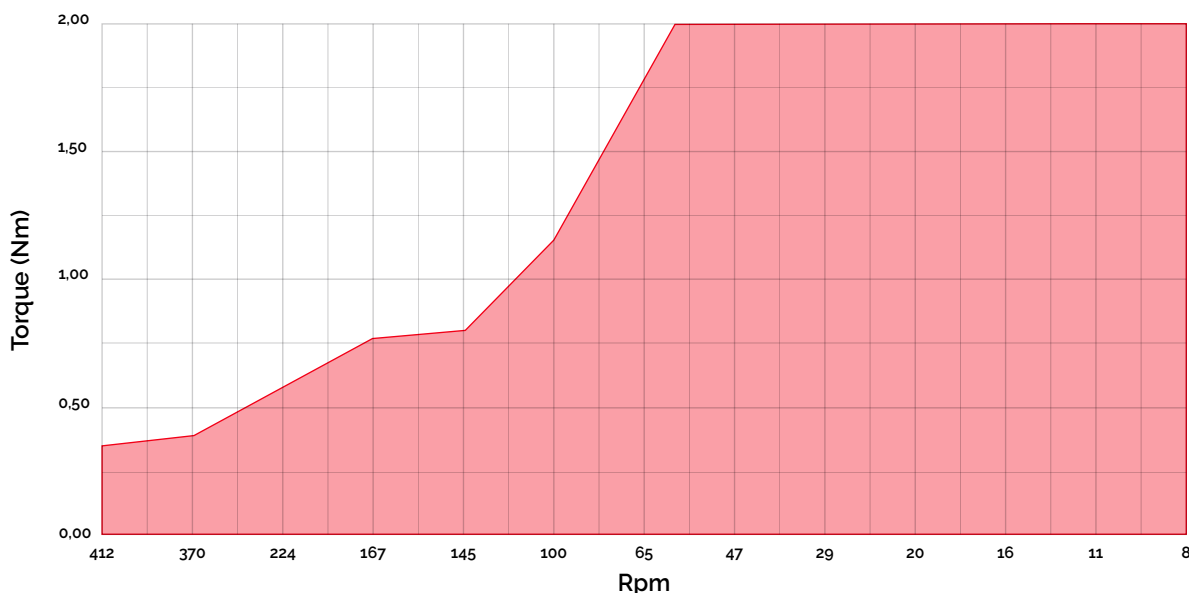

GEAR BOX OPTIONS:

We are manufacturers and offer customization options tailored to your needs.

