


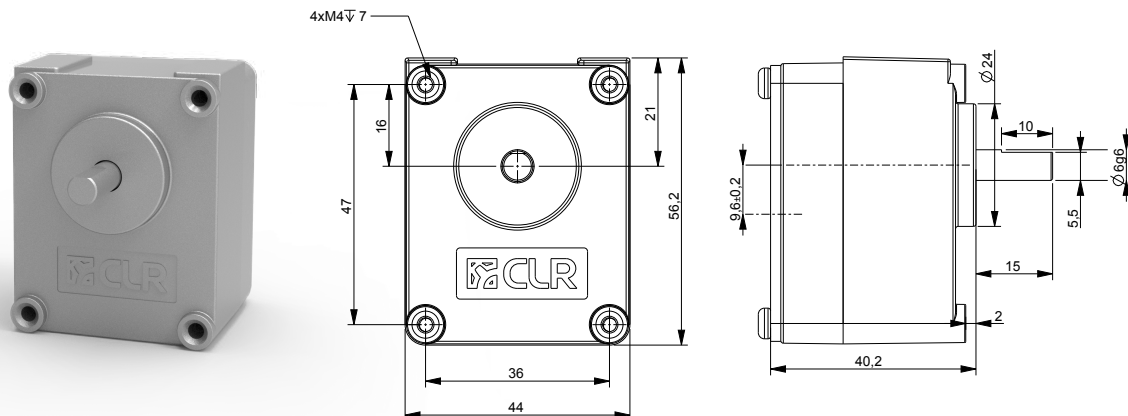


GENERAL SPECIFICATIONS

Gear Reducer:	Spur - Helical
Output Shaft:	Steel
Output Shaft Bearing:	Ball and Needle Bearing
Maximum Radial Load (8 mm from flange):	150 N
Maximum Allowable Axial Load:	100 N
Gear and Output Shaft Material:	Steel
Gear Support:	Hardened and Ground Steel Shafts
Housing and Cover:	Zamak
Operating Torque:	Up to 3 N·m

TYPICAL RATIOS

5,34:1	159,06:1
9,94:1	197,81:1
17,81:1	284,90:1
29,78:1	397:1
59,35:1	476,41:1
85,48:1	636,25:1
119,10:1	

MOTOR COMPATIBILITY: Brushless, steppers, AC and DC

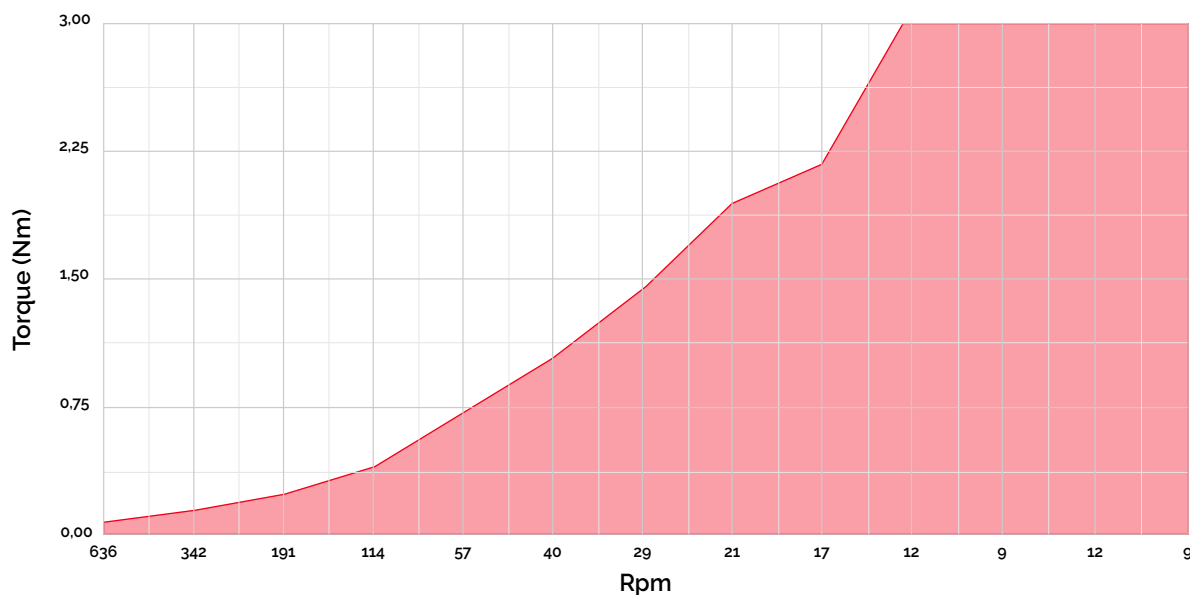

GEAR BOX OPTIONS:

We are manufacturers and offer customization options tailored to your needs.

