
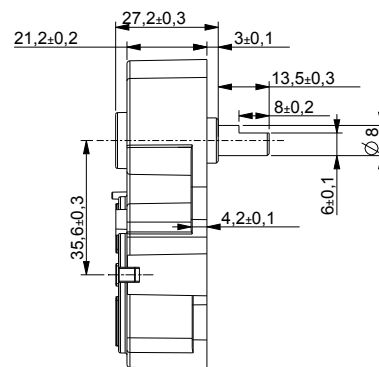


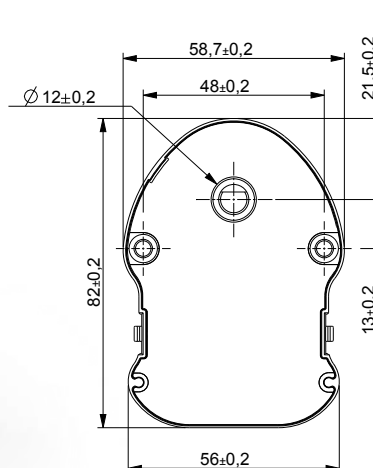


GENERAL SPECIFICATIONS

Gear Reducer:	Spur - Helical
Output Shaft:	Steel
Output Shaft Bearing:	Sintered Bushing
Maximum Radial Load (10 mm from flange):	130 N
Maximum Allowable Axial Load:	80 N
Gear and Output Shaft Material:	Steel and POM
Gear Support:	Hardened and Ground Steel Shafts
Housing and Cover:	Zamak
Operating Torque:	Up to 3,5 N·m

TYPICAL RATIOS

250:1
401,8:1
500:1
1000:1
2000:1
4846:1
7788:1
24642:1

MOTOR COMPATIBILITY: Brushless, steppers, AC and DC

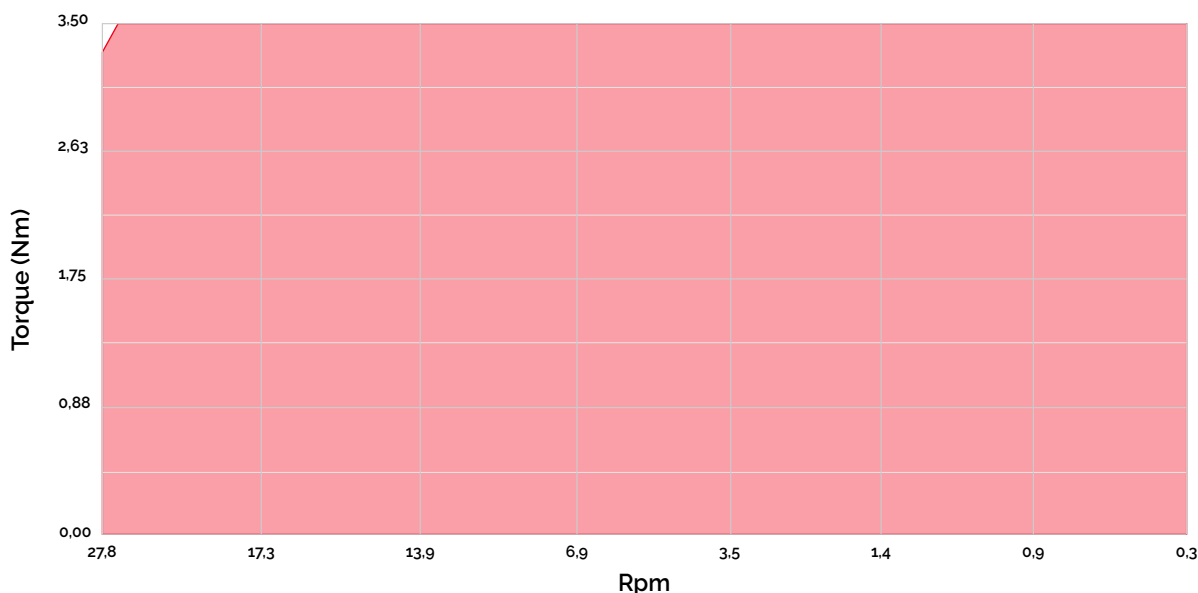

GEAR BOX OPTIONS:

We are manufacturers and offer customization options tailored to your needs.

