
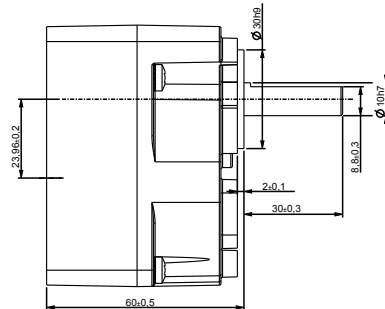


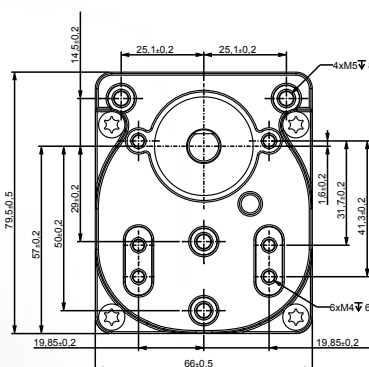


GENERAL SPECIFICATIONS

Gear Reducer:	Spur - Helical
Output Shaft:	Steel
Output Shaft Bearing:	Ball Bearing
Maximum Radial Load (15 mm from flange):	500 N
Maximum Allowable Axial Load:	300 N
Gear and Output Shaft Material:	Steel
Housing and Cover:	Zamak
Operating Torque:	Up to 8 N·m
Mounting:	External Fixing Points

TYPICAL RATIOS

10,34:1	218,40:1
16,80:1	314,50:1
33,60:1	425,88:1
67,20:1	709,80:1
96,77:1	1075,20:1
161,28:1	

MOTOR COMPATIBILITY: Brushless, steppers, AC and DC

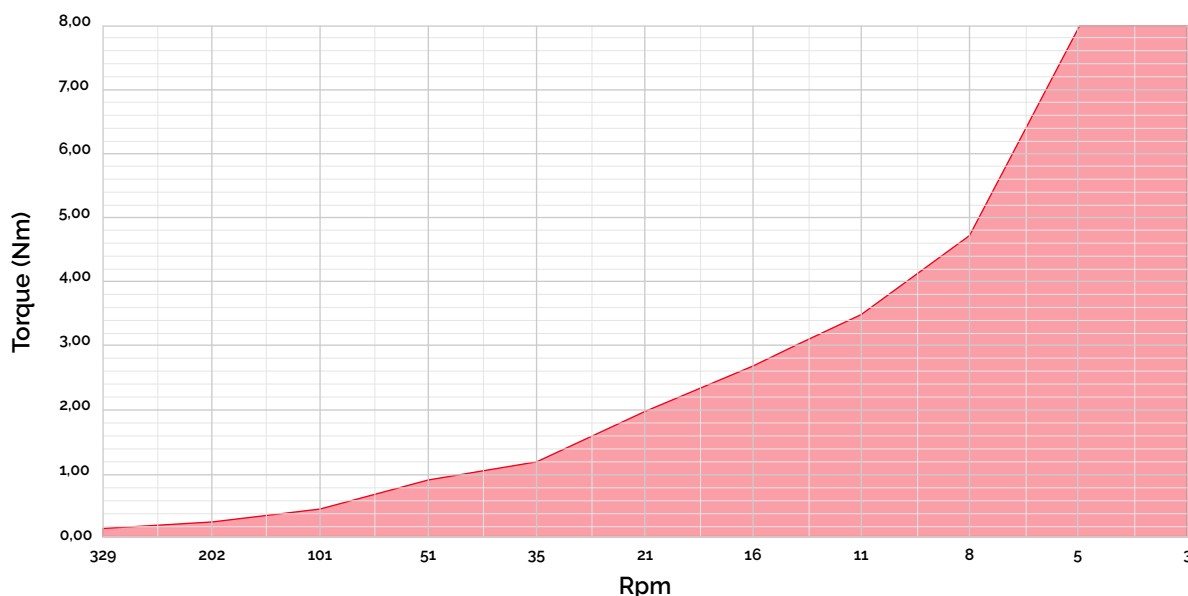

GEAR BOX OPTIONS:

We are manufacturers and offer customization options tailored to your needs.

