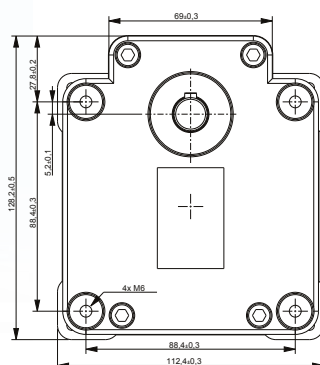



GENERAL SPECIFICATIONS

Gear Reducer:	Helical
Output Shaft:	Steel
Output Shaft Support:	Ball Bearing
Maximum Radial Load (15 mm from flange):	1000 N
Maximum Allowable Axial Load:	1000 N
Gear and Output Shaft Material:	Steel
Gears Support:	Bearings
Housing and Cover:	Aluminium
Operating Torque:	Up to 20 N·m

TYPICAL RATIOS

9,8:1
18,8:1
31,1:1
56,3:1
93,4:1
119,8:1
162,4:1
229,1:1
310,6:1
399:1

MOTOR COMPATIBILITY: Brushless, steppers, AC, DC and servomotor

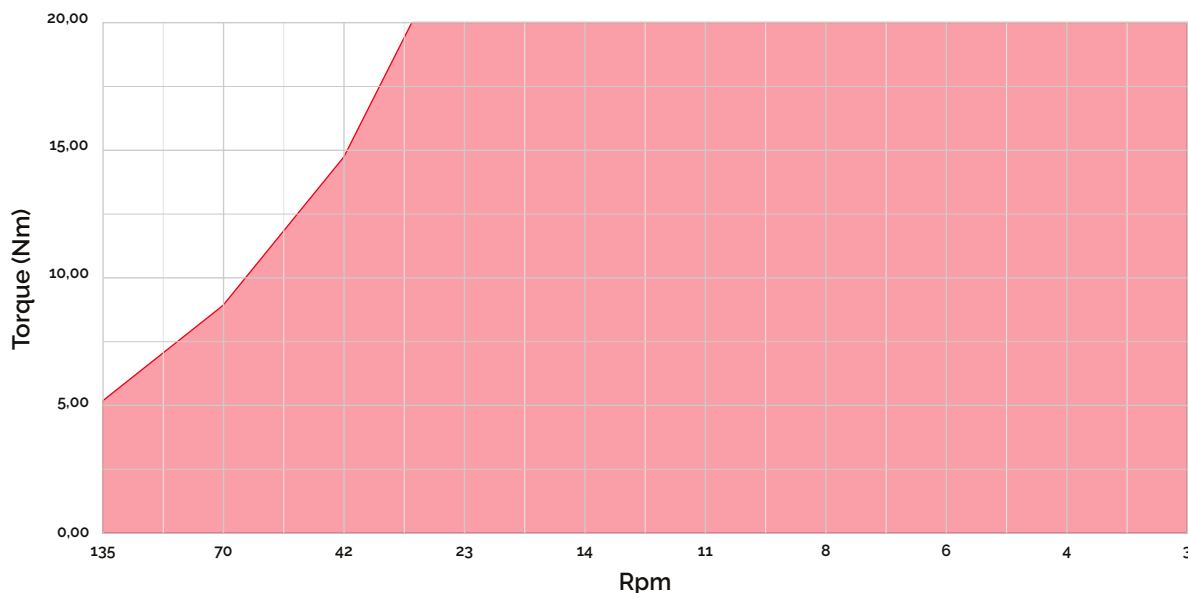

GEAR BOX OPTIONS:

We are manufacturers and offer customization options tailored to your needs.

