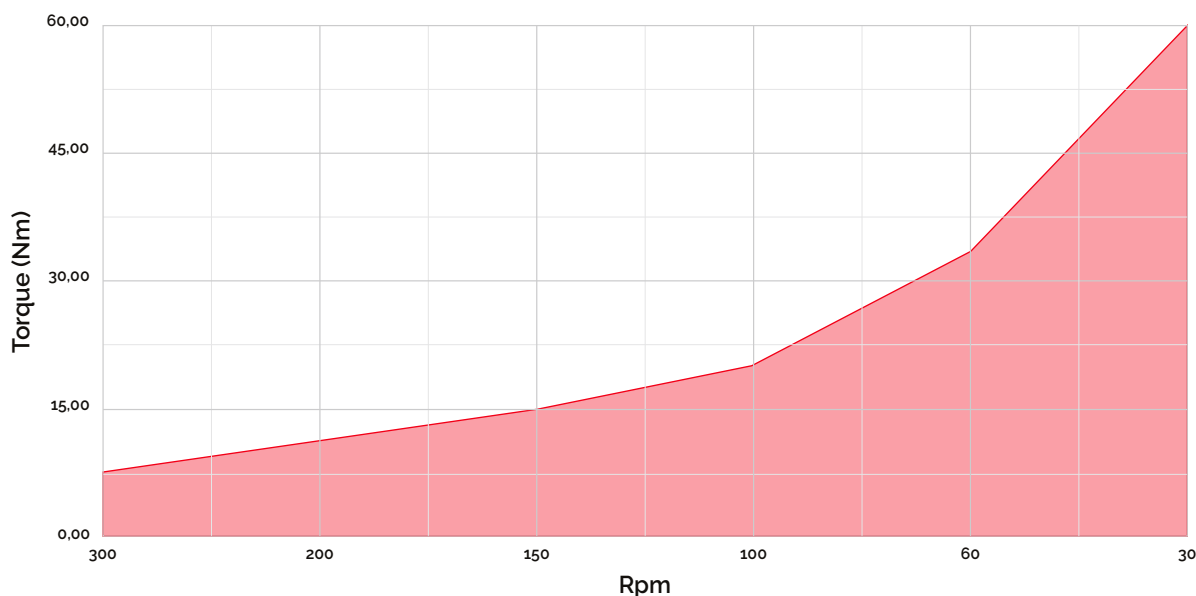
**GENERAL SPECIFICATIONS**

Gear Reducer:	Spur - Helical
Output Shaft:	Steel
Output Shaft Support:	Ball and Needle Bearing
Maximum Radial Load (10 mm from flange):	1200 N
Maximum Allowable Axial Load:	400 N
Gear and Output Shaft Material:	Steel
Gear Support:	Bearings
Housing and Cover:	Aluminium
Operating Torque:	Up to 55 N·m

TYPICAL RATIOS

10:1
15:1
20:1
30:1
50:1
100:1

MOTOR COMPATIBILITY: Brushless, steppers, AC, DC and servomotor**GEAR BOX OPTIONS:**

We are manufacturers and offer customization options tailored to your needs.

