


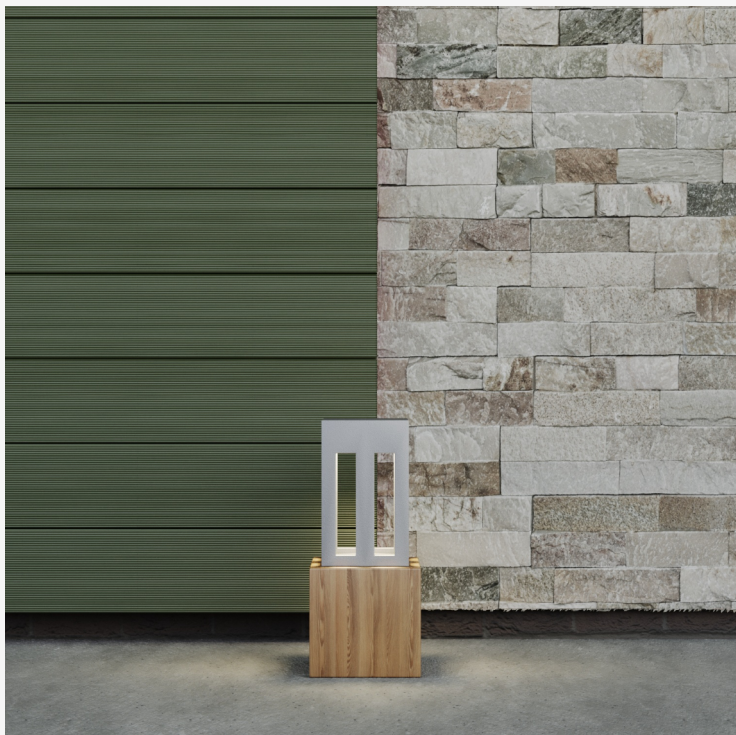


SPECIFICATIONS


Material	Extruded Aluminum
Lens	N/A
Length / Width	6" x 6" / Custom on request*
Total Height	14"
Base Height	8"
Light Source Type	LED
Power	8W / 14W
Input Voltage	110-277V, 50-60 Hz
LED Output	60 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V 360° symmetrical light distribution
IP Rating	IP 65
Warranty	5 years
Finishes	16 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*

GENERAL INFORMATION

The SYLVA G is a compact garden bollard luminaire designed for low-level pathway and landscape illumination with soft, glare-free 360° light distribution. Made of extruded aluminum with a frosted acrylic lens, it offers IP65 protection, multiple CCT options, and efficient LED performance ideal for decorative and functional garden applications.

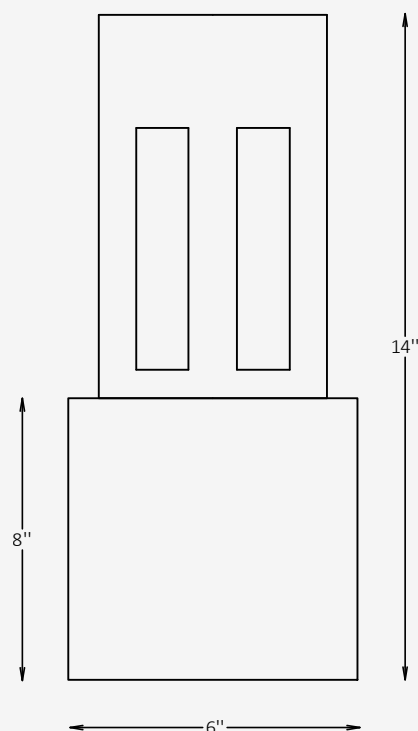

OTHER VERSIONS AVAILABLE

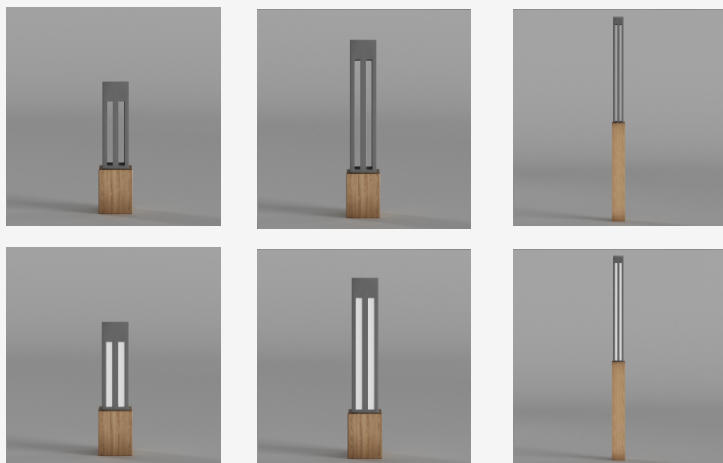

CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Length / Width	Height	Material
☒ SLV-G Garden	☐ 6 6" x 6" ☐ Cus Custom on request	☐ 14 14" ☐ Cus Custom on request	☒ AL Extruded Aluminum
CCT	Wattage / Lumens	Light Distribution	Dimming
☐ 22 2200K ☐ 30 3000K ☐ 40 4000K ☐ 50 5000K	☐ 48 8 W / 480 lm ☐ 84 14 W / 840 lm ☐ Cus Custom on request	☒ LD5 Type V 360° symmetrical light distribution	☐ NN Non-Dimmable ☐ DM 0-10V
Body Finish Options	Base Finish Options	Mounting	
☐ ST Standard ☐ WE Wood effect ☐ MC Metallic ☐ Cus Custom on request	☐ ST Standard ☐ WE Wood effect ☐ MC Metallic ☐ Cus Custom on request	☒ SM Surface-mounted	

Finishes

Standard finishes

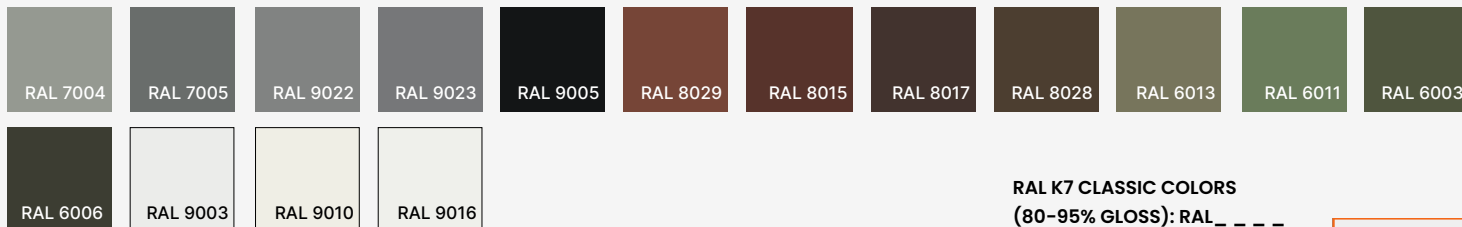

RAL K7 CLASSIC COLORS
(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.


On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Wood-effect finishes



Metallic finishes




Project

Notes

Bolt Patterns

for Surface-mounted Installation

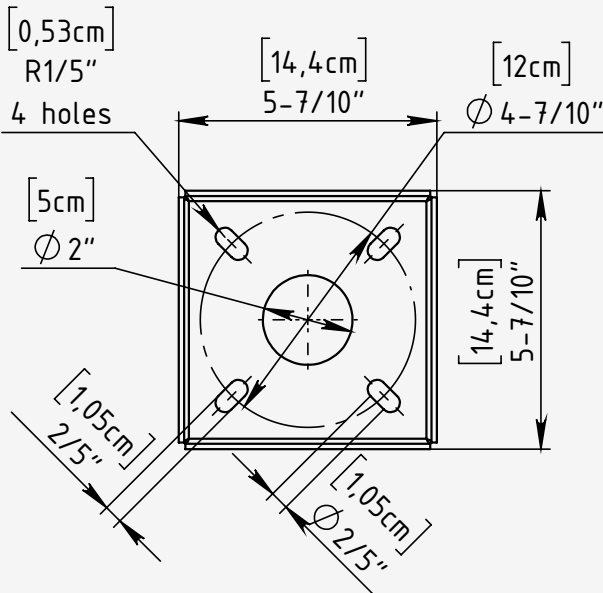

Mounting Type	Surface-mounted
Base Plate Material	Stainless Steel
Bolt Mounting Circle	Ø: 4-7/10"
Number of Anchor Bolt	4 equally holes (90° apart)
Bolt Size	1/4"-20 x 3 1/4" concrete anchor bolt

- Installation Notes:**
- Use a manufacturer-supplied base plate to position anchor bolts accurately.
 - Ensure bolts are embedded vertically and aligned to avoid fixture tilt.
 - Grouting under the base plate is recommended for leveling and load distribution.
 - Allow clearance for wiring through the center opening and access to bolt heads if concealed.