




GENERAL INFORMATION


The Orbita Echo Circle is a refined dual-emission pendant that delivers both upward and downward illumination in a sleek, architectural form. Designed for optimal performance and minimal visual weight, this luminaire features a slim aluminum profile and polycarbonate lens, offering efficient Beam Up & Down distribution. Ideal for open-plan environments, lobbies, and collaborative spaces, the Echo Circle enhances ambient brightness while maintaining visual balance and design harmony.

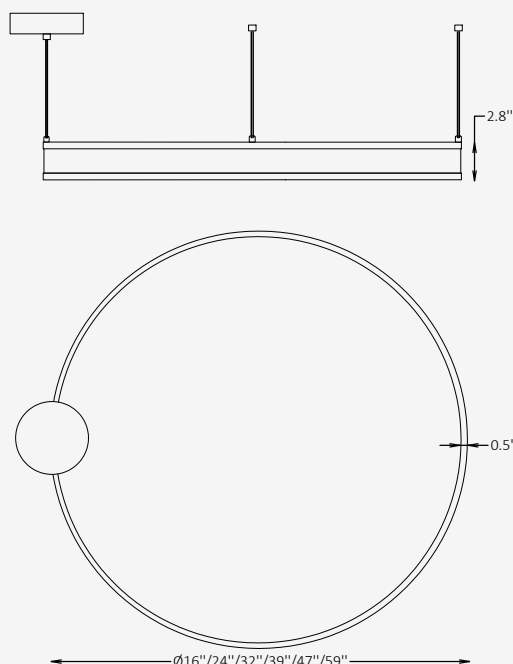

SPECIFICATIONS

Material	Aluminum
Lens	Polycarbonate
Diameter	16" / 23" / 31" / 39" / 47" / 59"
Profile Height	2.8"
Profile Width	0.5"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	30W / 50W / 60W / 80W / 90W / 100W
LED Output	70 lm/W
CCT	3000K / 4000K / 5000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Up & Down
IP Rating	IP 20
Warranty	5 years
Finishes	Sattin White / Sattin Black / RAL finishes

OTHER VERSIONS AVAILABLE

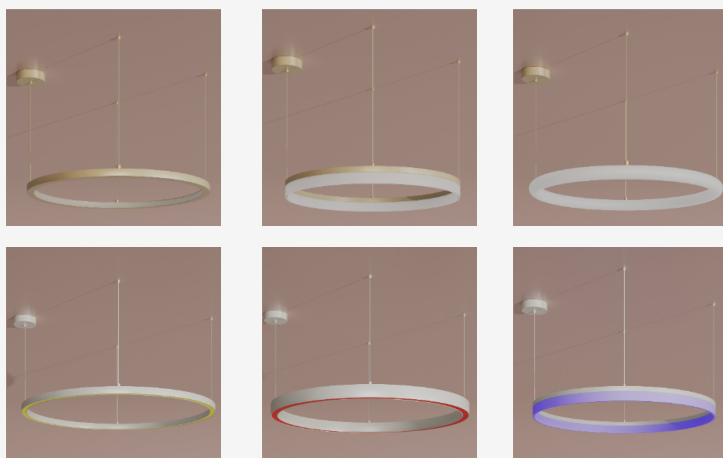

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage / Lumens		CCT
☒ OTE Circle / Pendant	☐ 16 16" / 30 W / 2100 lm	☐ 39 39" / 80 W / 5600 lm	☐ 30 3000K
	☐ 23 23" / 50 W / 3500 lm	☐ 47 47" / 90 W / 6300 lm	☐ 40 4000K
	☐ 31 31" / 60 W / 4200 lm	☐ 59 59" / 100 W / 7000 lm	☐ 50 5000K
Light Distribution	Dimming	CRI	Profile Finish Options
☒ BUD Beam Up & Down	☐ NN Non-Dimmable	☐ CR8 80	☐ SW Satin White
	☐ DM 0-10V	☐ CR9 90	☐ SB Satin Black
			☐ RAL RAL Finishes
Canopy Finish Options	Cord Finish Options	Mounting	Cord Length
☐ WH White	☐ WH White	☐ CT Central Canopy Suspension	☐ L11 118" (adjustable)
☐ BL Black	☐ BL Black	☐ MO Multi-Point Suspension	☐ Cus Custom on request

Finishes

Standard finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



RAL finishes



Photometric Data

