




GENERAL INFORMATION

The Orbita Arcus RGB Circle merges architectural form with vibrant dynamic lighting. Featuring a slim circular profile and RGB capability, this fixture delivers immersive ambient color effects with both inward and downward illumination. Ideal for hospitality, retail, or experiential spaces, Arcus creates visual impact while maintaining clean, modern lines and customizable finishes.

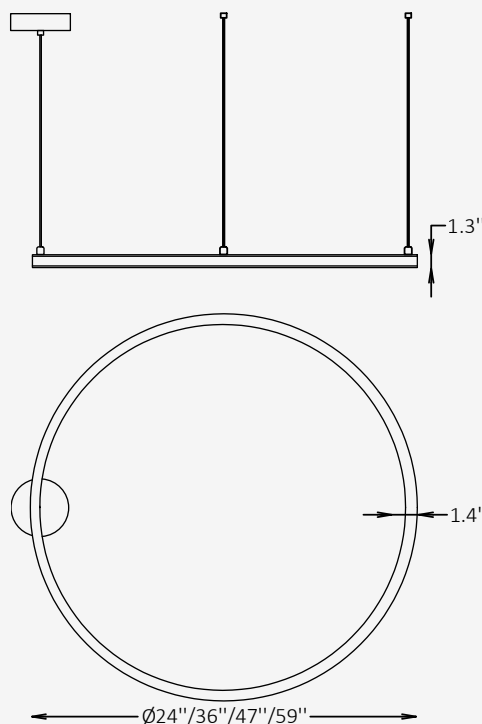

SPECIFICATIONS

Material	Aluminum
Lens	Polycarbonate
Diameter	23.6" / 35.4" / 47.2" / 59.1"
Profile Height	1.3"
Profile Width	1.4"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	32W / 40W / 70W / 80W
CCT	RGB
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam In / Beam Out
IP Rating	IP 20
Warranty	5 years
Finishes	Sattin White / Sattin Black / RAL finishes

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage	Light Distribution	Dimming
☒ OTU Circle / Pendant	☐ 23 23" / 32 W ☐ 35 35" / 40 W ☐ 47 47" / 70 W ☐ 59 59" / 80 W	☐ BN Beam In ☐ BO Beam Out	☐ NN Non-Dimmable ☐ DM 0-10V
CRI	Profile Finish Options	Canopy Finish Options	Cord Finish Options
☐ CR8 80 ☐ CR9 90	☐ SW Satin White ☐ SB Satin Black ☐ RAL RAL Finishes	☐ WH White ☐ BL Black	☐ WH White ☐ BL Black
Mounting	Cord Length		
☐ CT Central Canopy Suspension ☐ MO Multi-Point Suspension ☐ SM Surface-mounted	☐ L11 118" (adjustable) ☐ Cus Custom on request		

Finishes

Standard finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



RAL finishes



Photometric Data

