




GENERAL INFORMATION


The LOOMA Acoustic Pendant combines high-efficiency LED lighting with advanced sound-absorbing materials, delivering both visual comfort and acoustic enhancement to modern interiors. Its 300° beam in-and-out distribution creates balanced illumination, while the sleek profile and wide range of finishes make it a versatile choice for offices, hospitality, and contemporary living spaces.

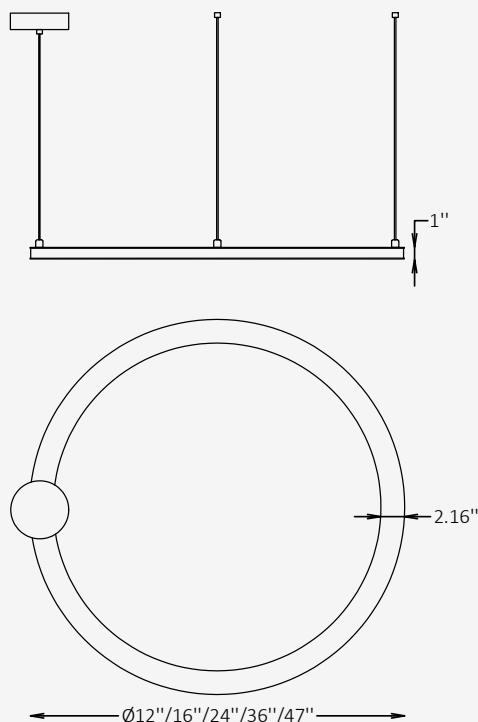

SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Silicon
Diameter	11.8" / 15.7" / 23.6" / 35.4" / 47.2
Height	1.1"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	32W / 45W / 60W / 100W / 135W
LED Output	70 lm/W
CCT	3000K / 3500K / 4000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	300° (Beam In and Out)
Appliance Class	I
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

OTHER VERSIONS AVAILABLE

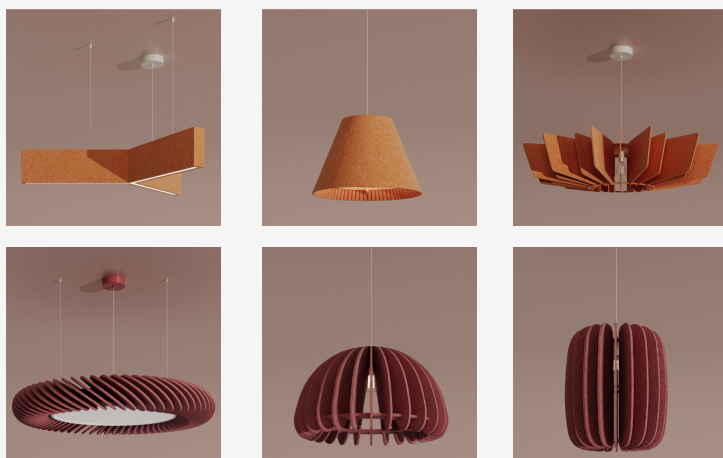

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Wattage / Lumens		CCT
☒ LMA Acoustic / Pendant	☐ 22 11.8" / 32 W / 2240 lm	☐ 70 35.4" / 100 W / 7000 lm	☐ 30 3000K
	☐ 29 15.7" / 42 W / 2940 lm	☐ 150 47.2" / 165 W / 11,500 lm	☐ 35 3500K
	☐ 42 23.6" / 60 W / 4200 lm		☐ 40 4000K
Light Distribution	Dimming	CRI	Acoustic Fiber Finish Options
☒ BIO 300° (Beam In and Out)	☐ NN Non-Dimmable	☐ CR8 80	☐ AF Acoustic fibers
	☐ DM 0-10V	☐ CR9 90	
Canopy Finish Options	Cord Finish Options		
☐ ST Standard	☐ WH White		
	☐ BL Black		

Finishes

Acoustic fiber finishes



Standard finishes

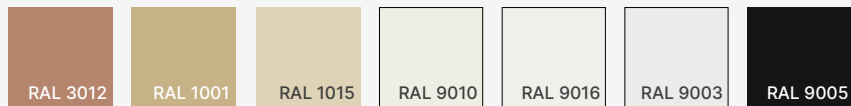

Cord finishes



RAL K7 CLASSIC COLORS

(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

