




GENERAL INFORMATION


The HALLEN acoustic pendant features a layered circular form crafted from 100% P.E.T. felt, designed to enhance sound absorption while providing soft, efficient illumination. With its 120° direct light distribution and modular sizing, it is ideal for open-plan spaces, meeting rooms, and hospitality environments where acoustic comfort and visual impact are equally important.

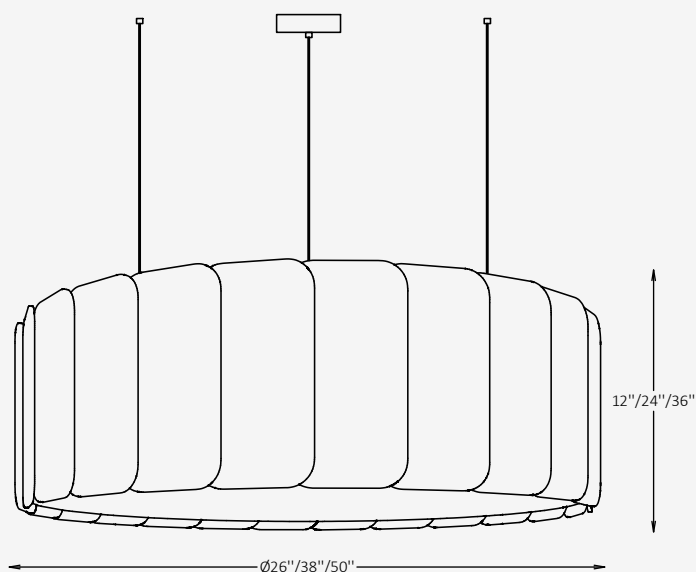

SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Diameter	26" / 38" / 50"
Height	12" / 24" / 36"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	40W / 90W / 180W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	120° (Direct)
Appliance Class	I
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

OTHER VERSIONS AVAILABLE

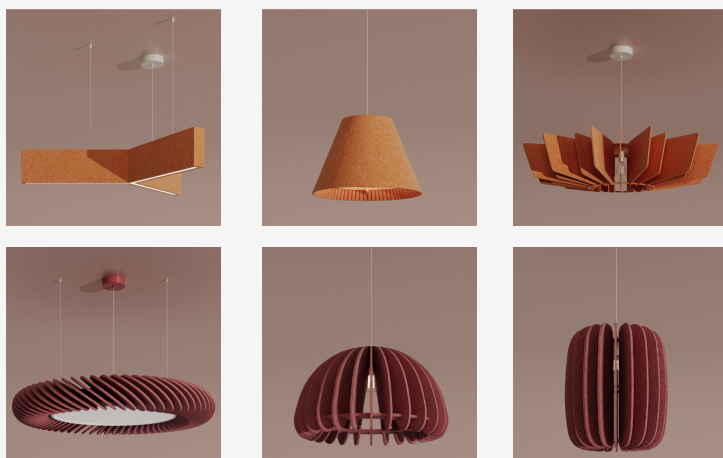

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Height / Wattage / Lumens	CCT	Light Distribution
☒ HLN Acoustic / Pendant	☐ 34 26" / 12" / 40 W / 3400 lm ☐ 76 38" / 24" / 90 W / 7650 lm ☐ 76 50" / 36" / 180 W / 15,300 lm	☐ 30 3000K ☐ 35 3500K ☐ 40 4000K	☒ DR 120° (Direct)
Dimming	CRI	Acoustic Fiber Finish Options	Canopy Finish Options
☐ NN Non-Dimmable ☐ DM 0-10V	☐ CR8 80 ☐ CR9 90	☐ AF Acoustic fibers	☐ ST Standard
Canopy Finish Options			
☐ WH White ☐ BL Black			

Finishes


Acoustic fiber finishes



Standard finishes

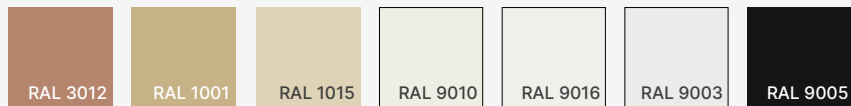

Cord finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL _ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

