



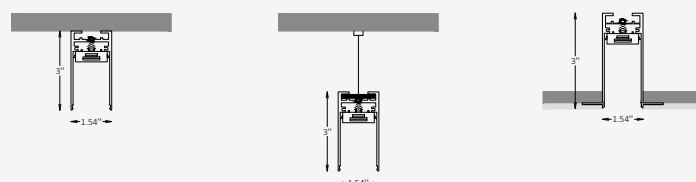

GENERAL INFORMATION


The MODARI DRIFTLINE Magnetic Track System offers a bold architectural presence with its geometric linear form and precision detailing. Designed for flexibility and performance, this suspended magnetic track system allows seamless integration of modular lighting heads, providing both functionality and visual balance. Ideal for modern interiors, it combines clean design lines with advanced lighting control to deliver efficient illumination and customizable configurations. Compatible with a range of A-We Lighting magnetic heads designed specifically for this system.

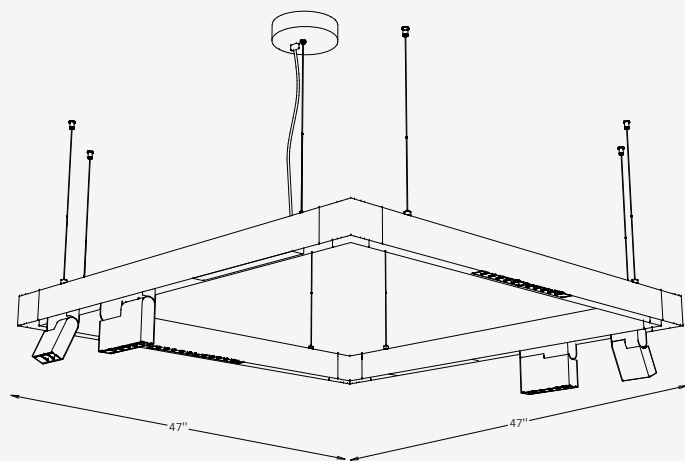

SPECIFICATIONS

Material	Aluminum
Width	47"
Length	47"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	82W
LED Output	6900 lm
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V / DALI
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 2 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE

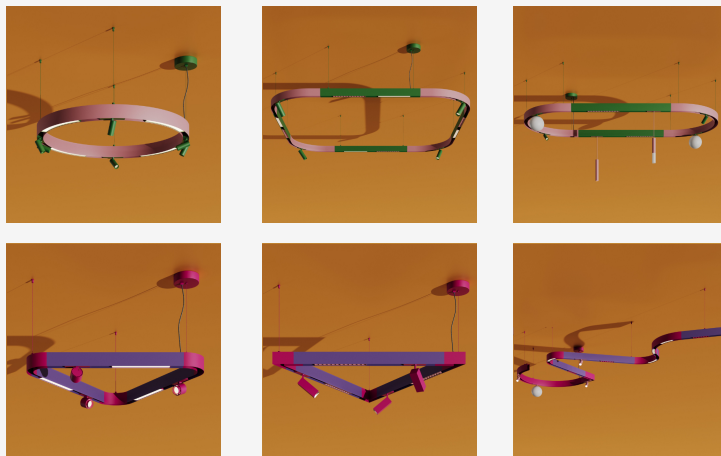

CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Width / Length	Wattage / Lumens	CCT
☒ DRF-MT Magnetic Track System	☐ 47 47" / 47" ☐ Cus Custom on request	☐ 69 82 W / 6900 lm ☐ Cus Custom on request	☐ 27 2700K ☐ 30 3000K ☐ 40 4000K ☐ Cus Custom on request
Dimming	CRI	Profile Finish Options	Heads Finish Options
☐ NN Non-Dimmable ☐ DM 0-10V ☐ DL DALI	☐ CR8 80 ☐ CR9 90	☐ ST Standard ☐ MC Metallic ☐ AWE A We Lighting Palette* ☐ Cus Custom on request	☐ ST Standard ☐ MC Metallic ☐ AWE A We Lighting Palette* ☐ Cus Custom on request
Canopy Finish Options	Cord Finish Options	Mounting	Cord Length
☐ ST Standard ☐ MC Metallic ☐ AWE A We Lighting Palette* ☐ Cus Custom on request	☐ WH White ☐ BL Black ☐ Cus Custom on request <i>Available only for the Pendant version*</i>	☐ PN Pendant ☐ MM Surface-mounted ☐ RD Recessed	☐ L11 118" (adjustable) ☐ Cus Custom on request <i>Available only for the Pendant version*</i>
DOT12 Head Beam Angle Options	FOLD03 Head Beam Angle Options	FOLD06 Head Beam Angle Options	
☐ DT12 12° ☐ DT34 34° ☐ DT48 48°	☐ FL12 12° ☐ FL34 34° ☐ FL48 48°	☐ FL12 12° ☐ FL34 34° ☐ FL48 48°	Note: The color combination shown in the photo on the first page of this spec sheet is part of the exclusive A We Lighting Design Palette. This custom palette reflects our brand's identity and is available as a special finish option — A We Lighting Palette*.

Compatible Heads for This Track System

LINEAR32



DOT12



FOLD03



FOLD06



Finishes

Standard finishes

RAL 4012	RAL 4005	RAL 4010	RAL 1012	RAL 1021	RAL 2000	RAL 2008	RAL 2002	RAL 3003	RAL 3011	RAL 3015	RAL 3014
RAL 3017	RAL 3018	RAL 5007	RAL 5019	RAL 5024	RAL 6011	RAL 6001	RAL 6017	RAL 6035	RAL 3012	RAL 1001	RAL 1015
RAL 9010	RAL 9016	RAL 9003	RAL 9022	RAL 7004	RAL 9005	RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _ All RAL Classic colors are available with no setup fee. On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).					



Metallic finishes

BB BLACK BRONZE	GL GOLD
-----------------------	------------