


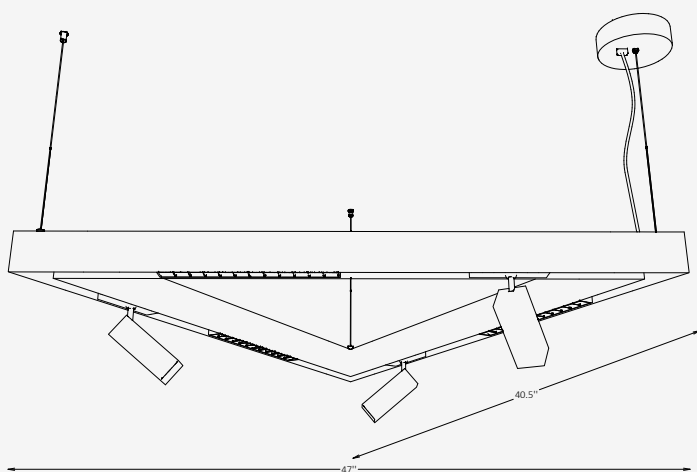




GENERAL INFORMATION







The MODARI FLUXAR Magnetic Track System combines geometric precision with magnetic versatility, offering a seamless lighting solution for architectural and commercial environments. Designed for both functionality and design flexibility, the system allows multiple head configurations to adapt illumination to specific needs. Constructed from aluminum and featuring high-performance LEDs with smooth dimming, FLUXAR delivers efficient, balanced lighting within a clean contemporary profile.



SPECIFICATIONS

Material	Aluminum
Width	40.5"
Length	47"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	72W
LED Output	5415 lm
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Dimming & Driver	Integral, 0-10V / DALI
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 2 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Width / Length	Wattage / Lumens	CCT
☒ FLX-MT Magnetic Track System	☐ 47 40.5" / 47"	☐ 54 72 W / 5415 lm	☐ 27 2700K
	☐ Cus Custom on request	☐ Cus Custom on request	☐ 30 3000K
			☐ 40 4000K
			☐ Cus Custom on request
Dimming	CRI	Profile Finish Options	Heads Finish Options
☐ NN Non-Dimmable	☐ CR8 80	☐ ST Standard	☐ ST Standard
☐ DM 0-10V	☐ CR9 90	☐ MC Metallic	☐ MC Metallic
☐ DL DALI		☐ AWE A We Lighting Palette*	☐ AWE A We Lighting Palette*
		☐ Cus Custom on request	☐ Cus Custom on request
Canopy Finish Options	Cord Finish Options	Mounting	Cord Length
☐ ST Standard	☐ WH White	☐ PN Pendant	☐ L11 118" (adjustable)
☐ MC Metallic	☐ BL Black	☐ MM Surface-mounted	☐ Cus Custom on request
☐ AWE A We Lighting Palette*	☐ Cus Custom on request	☐ RD Recessed	
☐ Cus Custom on request	Available only for the Pendant version*		Available only for the Pendant version*
DOT12 Head Beam Angle Options	SPOT35-SQ Head Beam Angle Options	Note: The color combination shown in the photo on the first page of this spec sheet is part of the exclusive A We Lighting Design Palette. This custom palette reflects our brand's identity and is available as a special finish option — A We Lighting Palette*.	
☐ DT12 12°	☐ SQ10 10°		
☐ DT34 34°			
☐ DT48 48°			

Compatible Heads for This Track System

DOT12



SPOT35-SQ



















Project

Notes

Finishes

Standard finishes

 RAL 4012	 RAL 4005	 RAL 4010	 RAL 1012	 RAL 1021	 RAL 2000	 RAL 2008	 RAL 2002	 RAL 3003	 RAL 3011	 RAL 3015	 RAL 3014
 RAL 3017	 RAL 3018	 RAL 5007	 RAL 5019	 RAL 5024	 RAL 6011	 RAL 6001	 RAL 6017	 RAL 6035	 RAL 3012	 RAL 1001	 RAL 1015
 RAL 9010	 RAL 9016	 RAL 9003	 RAL 9022	 RAL 7004	 RAL 9005	RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _ All RAL Classic colors are available with no setup fee. On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003). 					

Metallic finishes

 SB SHINY BRONZE	 GL GOLD
--	--