

VERAFORMA NODO

Pendant / VND




SPECIFICATIONS

Material	Metal + Glass			
Sphere Diameter	4.72"			
Length	69.7"			
Width	36.6"			
Input Voltage	110-277V, 50-60 Hz			
Light Source Type	LED			
Power	63W			
LED Output	7560 lm			
ССТ	2700K / 3000K / 4000K			
CRI	90			
Dimming & Driver	Integral, 0-10V			
Light Distribution	Omnidirectional / Diffused			
IP Rating	IP 20			
Finishes	28 RAL standard finishes 13 metallic finishes			
Warranty	5 years			

GENERAL INFORMATION

The Veraforma Nodo Pendant embodies balance, lightness, and sophistication through its sculptural form and radiant presence. A constellation of softly diffused glass spheres extends across slender aluminum arms, creating an elegant interplay of structure and glow. Designed for both residential and hospitality interiors, Veraforma Nodo offers ambient, omnidirectional illumination that enhances the atmosphere of any space. Available in multiple finishes and configurations, it harmonizes artistic design with technical precision.

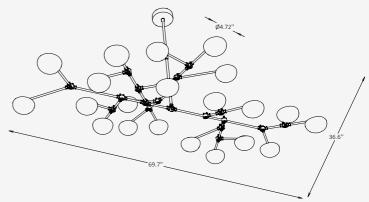

CERTIFICATION





Project	
Notes	
	J

Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

	Code	Length / Width	Wattage / Lumens		ССТ	
~	VND Pendant	70 69.7" / 36.6"		63 21 x 3 W = 63W / 7560 lm		27 2700K
		Cus Custom on request		Cus Custom on request		30 3000K
						40 4000K
	Glass Material	Dimming		Finish Options		Stem Length
	FR Frosted	NN Non-Dimmable		ST Standard		LAD 8" /16" /24" /32" /40" (adjustable)
	CL Clear	DM 0-10V		MC Metallic		Cus
	Cus Custom on request			Cus Custom on request		Custom on request

Finishes

Standard finishes



Metallic finishes



RAL 9010



RAL 9016



RAL 9003



RAL 9005



















RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL____

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

