

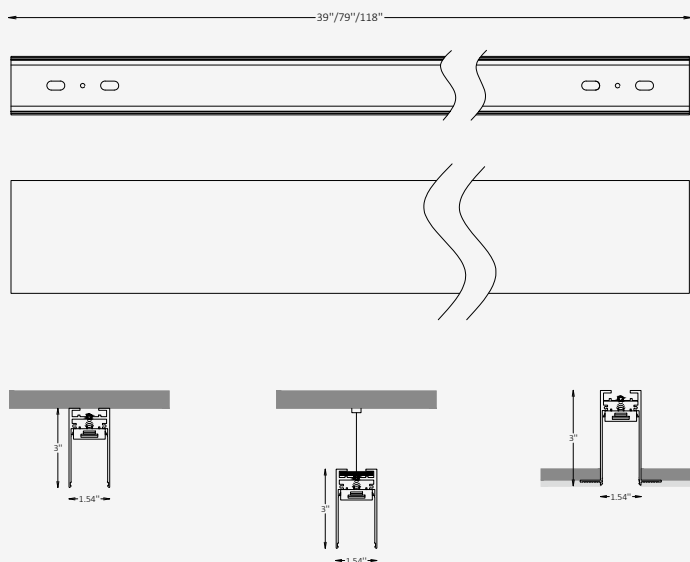


TRACK SPECIFICATIONS


Material	Aluminum
Length	39" / 79" / 118"
Width	1.54"
Height	3"
Input Voltage	110-277V, 50-60 Hz
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
Installation Type	Surface / Pendant / Recessed
IP Rating	IP 20
Warranty	5 years
Customisation	Full customisation available
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

GENERAL INFORMATION

The MODARI A-TRACK CORE is a fundamental component of the Modari magnetic lighting system, designed to support a variety of luminaire configurations. Its streamlined aluminum profile allows for surface, pendant, or recessed installation, providing maximum design flexibility and seamless integration into architectural environments. Compatible with multiple dimming protocols and available in a wide range of finishes, the A-TRACK CORE offers both technical precision and visual refinement for contemporary lighting layouts.



OTHER VERSIONS AVAILABLE

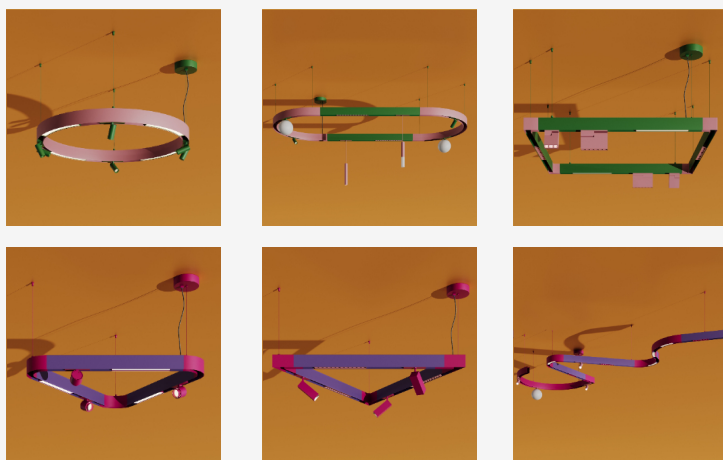

CERTIFICATION



Track Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Length	Mounting
☒ ATC-MT Magnetic Track System	☐ 27 110-277V, 50-60 Hz ☐ Cus Custom on request	☐ 39 39" ☐ 79 79" ☐ 118 118" ☐ Cus Custom on request	☐ PN Pendant ☐ SM Surface-mounted ☐ RD Recessed
Cord Length	Track Finish Option	Canopy Finish Option	
☐ L11 118" (adjustable) ☐ Cus Custom on request Available only for the Pendant version*	☐ ST Standard ☐ WE Wood effect ☐ MC Metallic ☐ Cus Custom on request	☐ WH White ☐ BL Black ☐ Cus Custom on request Available only for the Pendant version*	

Track Finishes

Standard finishes

RAL 4012	RAL 4005	RAL 4010	RAL 1012	RAL 1021	RAL 2000	RAL 2008	RAL 2002	RAL 3003	RAL 3011	RAL 3015	RAL 3014
RAL 3017	RAL 3018	RAL 5007	RAL 5019	RAL 5024	RAL 6011	RAL 6001	RAL 6017	RAL 6035	RAL 3012	RAL 1001	RAL 1015
						RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL _ _ _ _ All RAL Classic colors are available with no setup fee. On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).					
RAL 9010	RAL 9016	RAL 9003	RAL 9022	RAL 7004	RAL 9005						



Wood-effect finishes

WO WHITE OAK	OA OAK	HO HONEY OAK	MP MAPLE	WT WALNUT	MG MAHOGANY	DO DARK OAK	ES ESPRESSO


Metallic finishes

SB SHINY BRONZE	GL GOLD



GENERAL INFORMATION

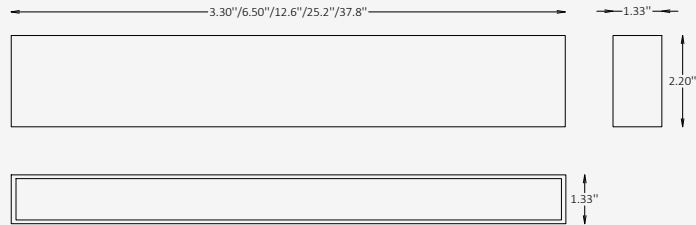The LINE-X is a modular lighting element engineered for the MODARI magnetic track system, offering clean linear illumination and versatile placement. Constructed from precision-formed aluminum with a frosted acrylic diffuser, it delivers consistent, glare-free light suitable for both ambient and task applications. Available in multiple lengths, dimming options, and finish selections, the LINE-X provides a refined balance of performance, flexibility, and architectural appeal within contemporary lighting compositions.



MODULE SPECIFICATIONS

Material	Aluminum
Lens	Acrylic, Frosted
Length	3.31" / 6.46" / 12.6" / 25.2" / 37.8"
Width	1.34"
Height	2.2"
Input Voltage	DC 24V
Light Source Type	LED
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

CERTIFICATION



Line-X Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Module Length / Wattage / Lumens	CCT
☒ LNx Line-X Module	☐ D24 DC 24V	☐ 3 3.31" / 4 W / 223 lm	☐ 27 2700K
	☐ Cus Custom on request	☐ 6 6.46" / 7 W / 488 lm	☐ 30 3000K
		☐ 12 12.6" / 13 W / 895 lm	☐ 40 4000K
		☐ 25 25.2" / 26 W / 1720 lm	☐ Cus Custom on request
		☐ 37 37.8" / 39 W / 2550 lm	
Light Distribution	CRI	Dimming	Finish Option
☒ DF Diffused	☐ CR8 80	☐ NN Non-Dimmable	☐ ST Standard
	☐ CR9 90	☐ DM0 0-10V	☐ WE Wood effect
		☐ DM1 1-10V	☐ MC Metallic
		☐ DL DALI	☐ Cus Custom on request
		☐ TR TRIAC	

Line-X Module Finishes

Standard finishes

RAL 4012	RAL 4005	RAL 4010	RAL 1012	RAL 1021	RAL 2000	RAL 2008	RAL 2002	RAL 3003	RAL 3011	RAL 3015	RAL 3014
RAL 3017	RAL 3018	RAL 5007	RAL 5019	RAL 5024	RAL 6011	RAL 6001	RAL 6017	RAL 6035	RAL 3012	RAL 1001	RAL 1015
						RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _ All RAL Classic colors are available with no setup fee. On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).					
RAL 9010	RAL 9016	RAL 9003	RAL 9022	RAL 7004	RAL 9005						



Wood-effect finishes

WO WHITE OAK	OA OAK	HO HONEY OAK	MP MAPLE	WT WALNUT	MG MAHOGANY	DO DARK OAK	ES ESPRESSO


Metallic finishes

SB SHINY BRONZE	GL GOLD



GENERAL INFORMATION

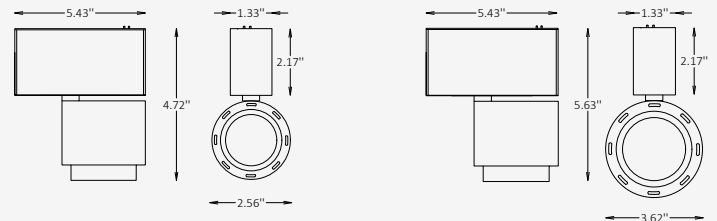The A-VUE is a high-precision spotlight module for the MODARI magnetic track system, designed to deliver clean, focused illumination with a selection of beam angles for adaptable lighting control. Its compact aluminum body and refined optics ensure visual comfort and accuracy, making it ideal for accent, retail, or architectural applications. With multiple dimming options and finish choices, A-VUE integrates effortlessly into both functional and decorative lighting compositions.



MODULE SPECIFICATIONS

Material	Aluminum
Diameter	2.55" / 3.62"
Height	2.55" / 3.46"
Input Voltage	DC 24V
Light Source Type	LED
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Beam Angle	10° / 20° / 30°
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

CERTIFICATION















A-Vue Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Diameter / Height / Wattage / Lumens	CCT
☒ VUE A-Vue Module	☐ D24 DC 24V	☐ 2 2.55" / 2.55" / 8 W / 251 lm	☐ 27 2700K
	☐ Cus Custom on request	☐ 3 3.62" / 3.46" / 15 W / 481 lm	☐ 30 3000K
			☐ 40 4000K
			☐ Cus Custom on request
Beam Angle	CRI	Dimming	Finish Option
☐ B10 10°	☐ CR8 80	☐ NN Non-Dimmable	☐ ST Standard
☐ B20 20°	☐ CR9 90	☐ DM0 0-10V	☐ WE Wood effect
☐ B30 30°		☐ DM1 1-10V	☐ MC Metallic
		☐ DL DALI	☐ Cus Custom on request
		☐ TR TRIAC	



A-Vue Module Finishes

Standard finishes


											
											
						RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _ All RAL Classic colors are available with no setup fee. On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).					



Wood-effect finishes

							
--	---	---	---	---	---	---	--



Metallic finishes

	
--	---



GENERAL INFORMATION

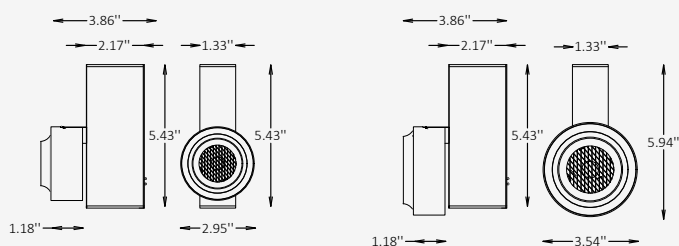The A-PIX is a compact spotlight module engineered for the MODARI magnetic track system, delivering precise directional illumination with a 36° beam angle. Designed for versatility, it integrates seamlessly into architectural spaces where focused, high-performance lighting is desired. Available in a variety of finishes and dimming options, the A-PIX combines aesthetic adaptability with technical precision, making it ideal for accent, display, or ambient applications.



MODULE SPECIFICATIONS

Material	Aluminum
Diameter	2.75" / 3.54" / 4.33"
Height	1.18" / 1.26"
Input Voltage	DC 24V
Light Source Type	LED
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Beam Angle	36°
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

CERTIFICATION














A-Pix Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Diameter / Wattage / Lumens	CCT
☒ PIX A-Pix Module	☐ D24 DC 24V	☐ 2 2.75" / 10 W / 790 lm	☐ 27 2700K
	☐ Cus Custom on request	☐ 3 3.54" / 15 W / 1072 lm	☐ 30 3000K
		☐ 4 4.33" / 20 W / 1430 lm	☐ 40 4000K
			☐ Cus Custom on request
Beam Angle	CRI	Dimming	Finish Option
☒ B36 36°	☐ CR8 80	☐ NN Non-Dimmable	☐ ST Standard
	☐ CR9 90	☐ DM0 0-10V	☐ WE Wood effect
		☐ DM1 1-10V	☐ MC Metallic
		☐ DL DALI	☐ Cus Custom on request
		☐ TR TRIAC	


A-Pix Module Finishes

Standard finishes


											
RAL 4012	RAL 4005	RAL 4010	RAL 1012	RAL 1021	RAL 2000	RAL 2008	RAL 2002	RAL 3003	RAL 3011	RAL 3015	RAL 3014
											
RAL 3017	RAL 3018	RAL 5007	RAL 5019	RAL 5024	RAL 6011	RAL 6001	RAL 6017	RAL 6035	RAL 3012	RAL 1001	RAL 1015
						RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _ All RAL Classic colors are available with no setup fee. On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).					
RAL 9010	RAL 9016	RAL 9003	RAL 9022	RAL 7004	RAL 9005						



Wood-effect finishes

							
WO WHITE OAK	OA OAK	HO HONEY OAK	MP MAPLE	WT WALNUT	MG MAHOGANY	DO DARK OAK	ES ESPRESSO


Metallic finishes

	
SB SHINY BRONZE	GL GOLD

Photometric Data

Line-X 3


Diffuse



h(m)	E(lx)	Φ(m)
1	88	Φ2.38
2	22	Φ4.77
3	9	Φ7.16
4	5	Φ9.55
5	3	Φ11.94

A-Vue 2 / 10°


10°



h(m)	E(lx)	Φ(m)
1	4109	Φ0.20
2	1027	Φ0.40
3	456	Φ0.61
4	256	Φ0.81
5	164	Φ1.02

A-Pix 2 / 36°


36°



h(m)	E(lx)	Φ(m)
1	3431	Φ0.66
2	857	Φ1.33
3	381	Φ2.00
4	214	Φ2.66
5	137	Φ3.33

Line-X 6


Diffuse



h(m)	E(lx)	Φ(m)
1	189	Φ2.46
2	47	Φ4.92
3	21	Φ7.38
4	11	Φ9.84
5	7	Φ12.30

A-Vue 2 / 20°


10°



h(m)	E(lx)	Φ(m)
1	4109	Φ0.20
2	1027	Φ0.40
3	456	Φ0.61
4	256	Φ0.81
5	164	Φ1.02

A-Pix 3 / 36°


36°



h(m)	E(lx)	Φ(m)
1	1585	Φ0.65
2	396	Φ1.30
3	176	Φ1.95
4	99	Φ2.60
5	63	Φ3.25

Line-X 12


Diffuse



h(m)	E(lx)	Φ(m)
1	189	Φ2.46
2	47	Φ4.92
3	21	Φ7.38
4	11	Φ9.84
5	7	Φ12.30

A-Vue 2 / 30°


10°



h(m)	E(lx)	Φ(m)
1	4109	Φ0.20
2	1027	Φ0.40
3	456	Φ0.61
4	256	Φ0.81
5	164	Φ1.02

A-Pix 4 / 36°


36°



h(m)	E(lx)	Φ(m)
1	3431	Φ0.66
2	857	Φ1.33
3	381	Φ2.00
4	214	Φ2.66
5	137	Φ3.33

Line-X 25


Diffuse



h(m)	E(lx)	Φ(m)
1	344	Φ2.47
2	86	Φ4.94
3	38	Φ7.41
4	21	Φ9.88
5	13	Φ12.35

A-Vue 3 / 10°


10°



h(m)	E(lx)	Φ(m)
1	9750	Φ0.20
2	2437	Φ0.40
3	1083	Φ0.60
4	609	Φ0.80
5	390	Φ1.00

Line-X 25


Diffuse



h(m)	E(lx)	Φ(m)
1	661	Φ2.47
2	165	Φ4.94
3	73	Φ7.41
4	41	Φ9.88
5	26	Φ12.36

A-Vue 3 / 20°


20°



h(m)	E(lx)	Φ(m)
1	6022	Φ0.25
2	1505	Φ0.50
3	669	Φ0.75
4	376	Φ1.00
5	240	Φ1.25

A-Vue 3 / 30°

30°



h(m)	E(lx)	Φ(m)
1	2204	Φ0.39
2	551	Φ0.79
3	244	Φ1.19
4	137	Φ1.59
5	88	Φ1.99