





## GENERAL INFORMATION


The PILLAR W is a contemporary outdoor wall luminaire that combines soft illumination with refined architectural form. Its cylindrical housing and frosted acrylic diffuser provide smooth, downward light distribution ideal for façades, entryways, and pathways. Designed for durability and performance, PILLAR W features IP65 protection, multiple finish and CCT options, and integral 0-10V dimming for enhanced versatility in modern exterior lighting applications.



## SPECIFICATIONS

|                    |                                                                                              |
|--------------------|----------------------------------------------------------------------------------------------|
| Material           | Extruded Aluminum                                                                            |
| Lens               | Frosted, Acrylic                                                                             |
| Diameter           | 4" / Custom on request*                                                                      |
| Height             | 7"                                                                                           |
| Depth              | 5"                                                                                           |
| Light Source Type  | LED                                                                                          |
| Power              | 10W / 18W / 23W                                                                              |
| Input Voltage      | 110-277V, 50-60 Hz                                                                           |
| LED Output         | 48 lm/W                                                                                      |
| CCT                | 2200K / 2700K / 3000K / 4000K / 5000K                                                        |
| CRI                | 90                                                                                           |
| Dimming & Driver   | Integral, 0-10V                                                                              |
| Light Distribution | Type IV — Forward Throw (Downlight)                                                          |
| IP Rating          | IP 65                                                                                        |
| Warranty           | 5 years                                                                                      |
| Finishes           | 16 standard finishes<br>8 wood-effect finishes<br>12 metallic finishes<br>Custom on request* |

## OTHER VERSIONS AVAILABLE

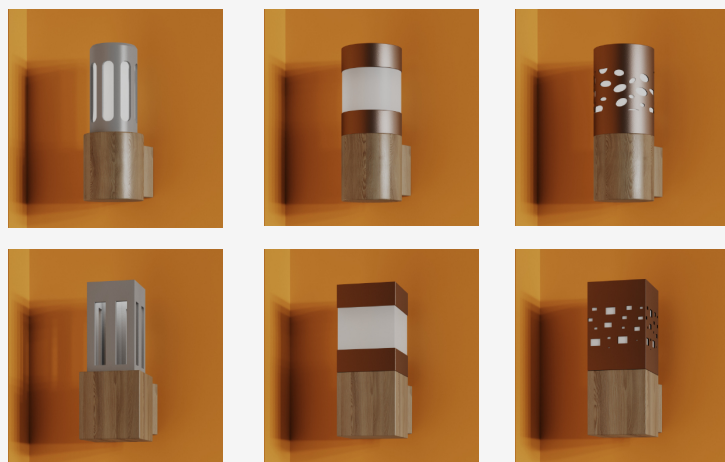

## CERTIFICATION




## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

| Code                                                                                                                                                                                                                                     | Diameter / Height / Depth                                                                                         | Material                                                                                              | CCT                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> <b>PLR-W</b><br>Outdoor Wall                                                                                                                                                                         | <input type="checkbox"/> <b>4</b><br>4" x 7" x 5"<br><br><input type="checkbox"/> <b>Cus</b><br>Custom on request | <input checked="" type="checkbox"/> <b>AL</b><br>Extruded Aluminum                                    | <input type="checkbox"/> <b>22</b><br>2200K<br><br><input type="checkbox"/> <b>30</b><br>3000K<br><br><input type="checkbox"/> <b>40</b><br>4000K<br><br><input type="checkbox"/> <b>50</b><br>5000K                          |
| Wattage / Lumens                                                                                                                                                                                                                         | Light Distribution                                                                                                | Dimming                                                                                               | Body Finish Options                                                                                                                                                                                                           |
| <input type="checkbox"/> <b>4</b><br>10 W / 480 lm<br><br><input type="checkbox"/> <b>8</b><br>18 W / 864 lm<br><br><input type="checkbox"/> <b>11</b><br>23 W / 1104 lm<br><br><input type="checkbox"/> <b>Cus</b><br>Custom on request | <input checked="" type="checkbox"/> <b>LD4</b><br>Type IV — Forward Throw (Downlight)                             | <input type="checkbox"/> <b>NN</b><br>Non-Dimmable<br><br><input type="checkbox"/> <b>DM</b><br>0-10V | <input type="checkbox"/> <b>ST</b><br>Standard<br><br><input type="checkbox"/> <b>WE</b><br>Wood effect<br><br><input type="checkbox"/> <b>MC</b><br>Metallic<br><br><input type="checkbox"/> <b>Cus</b><br>Custom on request |
| Base Finish Options                                                                                                                                                                                                                      |                                                                                                                   |                                                                                                       |                                                                                                                                                                                                                               |
| <input type="checkbox"/> <b>ST</b><br>Standard<br><br><input type="checkbox"/> <b>WE</b><br>Wood effect<br><br><input type="checkbox"/> <b>MC</b><br>Metallic<br><br><input type="checkbox"/> <b>Cus</b><br>Custom on request            |                                                                                                                   |                                                                                                       |                                                                                                                                                                                                                               |

## Finishes

### Standard finishes

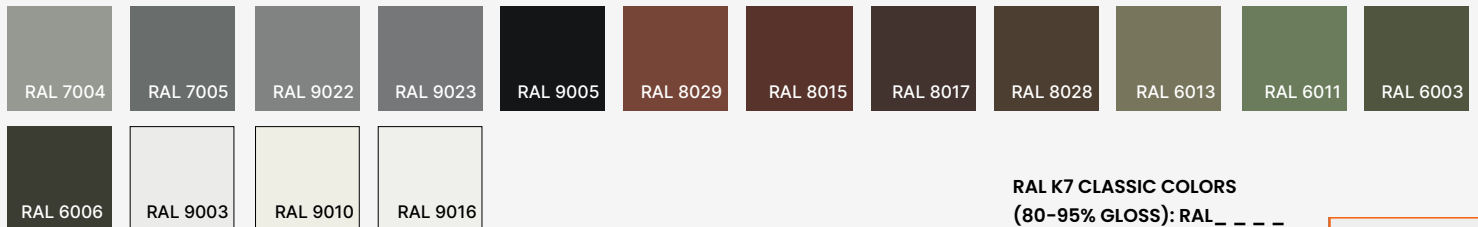

### RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



### Wood-effect finishes



### Metallic finishes

