



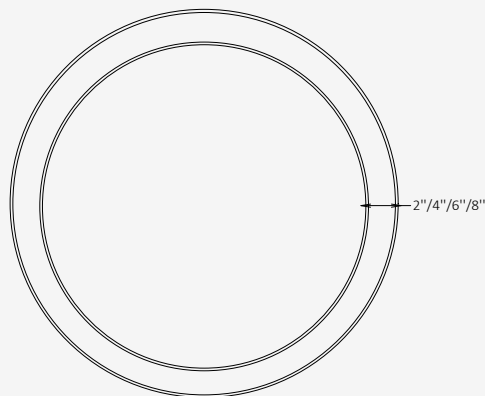

GENERAL INFORMATION

The ORBITA CYCLE CIRCLE is a contemporary ring pendant designed for balanced architectural illumination. Combining precision-engineered aluminum with a seamless polycarbonate diffuser, it offers uniform light in beam-down, beam-up, or dual-emission configurations. Its minimalist circular form and wide range of finishes make it ideal for offices, hospitality, and modern interior environments.

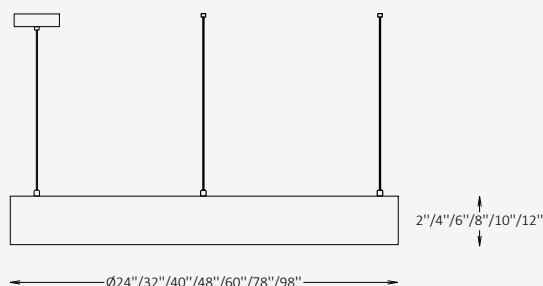

SPECIFICATIONS

Material	Stainless Steel
Lens	Polycarbonate
Diameter	24" / 32" / 40" / 48" / 60" / 78" / 98"
Profile Height	2" / 4" / 6" / 8" / 10" / 12"
Profile Width	2" / 4" / 6" / 8"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	38W / 52W / 64W / 77W / 97W / 126W / 158W
LED Output	Beam Up / Beam Down - 120 lm/w Beam Up & Down - 120 lm/w & 80 lm/w
CCT	2700K / 3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Down / Beam Up / Beam Up & Down
IP Rating	IP 20
Warranty	5 years
Finishes	30 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage / Lumens		Profile Height
☒ CYL Circle / Pendant	☐ 24 24" / 38 W / 4560 lm	☐ 24-BI 24" / 76 W / 4560 + 3040 lm	☐ 2 2"
	☐ 32 32" / 52 W / 6200 lm	☐ 32-BI 32" / 108 W / 6200 lm + 4200 lm	☐ 4 4"
	☐ 40 40" / 64 W / 7600 lm	☐ 40-BI 40" / 128 W / 7600 lm + 5150 lm	☐ 6 6"
	☐ 48 48" / 77 W / 9200 lm	☐ 48-BI 48" / 154 W / 9200 lm + 6200 lm	☐ 8 8"
	☐ 60 60" / 97 W / 11,600 lm	☐ 60-BI 60" / 194 W / 11,600 lm + 7800 lm	☐ 10 10"
	☐ 151 78" / 126 W / 15,100 lm	☐ 151-BI 78" / 252 W / 15,100 lm + 10,100 lm	☐ 12 12"
	☐ 189 98" / 158 W / 18,900 lm	☐ 189-BI 98" / 316 W / 18,900 lm + 12,700 lm	☐ Cus Custom on request
	*Supports only DIRECT or INDIRECT emission types. *Supports only simultaneous DIRECT and INDIRECT lighting output.		
Profile Width	Light Distribution	Dimming	Profile Finish Options
☐ 2 2"	☐ BD Beam Down	☐ NN Non-Dimmable	☐ ST Standard
☐ 4 4"	☐ BU Beam Up	☐ DM 0-10V	☐ WE Wood effect
☐ 6 6"	☐ BUD Beam Up & Down	☐ Cus Custom on request	☐ MC Metallic
☐ 8 8"			☐ Cus Custom on request
☐ Cus Custom on request			
Canopy Finish Options	Cord Finish Options	Mounting	Cord Length
☐ ST Standard	☐ SVW White	☐ CT Central Canopy Suspension	☐ L11 118" (adjustable)
☐ WE Wood effect	☐ SVB Black	☐ MO Multi-Point Suspension	☐ Cus Custom on request
☐ MC Metallic	☐ SVT Transparent		
☐ Cus Custom on request	☐ Cus Custom on request		

Finishes

Standard finishes

RAL 4012	RAL 4005	RAL 4010	RAL 1012	RAL 1021	RAL 2000	RAL 2008	RAL 2002	RAL 3003	RAL 3011	RAL 3015	RAL 3014
RAL 3017	RAL 3018	RAL 5007	RAL 5019	RAL 5024	RAL 6011	RAL 6001	RAL 6017	RAL 6035	RAL 3012	RAL 1001	RAL 1015
RAL 9010	RAL 9016	RAL 9003	RAL 9022	RAL 7004	RAL 9005						

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Wood-effect finishes

WO WHITE OAK	OA OAK	HO HONEY OAK	MP MAPLE	WT WALNUT	MG MAHOGANY	DO DARK OAK	ES ESPRESSO
-----------------	-----------	-----------------	-------------	--------------	----------------	----------------	----------------

Metallic finishes

001 SUNLIT GOLD	003 IMPERIAL GOLD	005 DESERT BRONZE	007 AMBER ALLOY	009 SIENNA BRONZE	014 REDWOOD GLOW	017 AGED CITRON	018 ARCTIC STEEL	019 CAMEL BRASS	020 CEDAR FLAME	021 CHARRED OAK	023 OBSIDIAN STEEL
--------------------	----------------------	----------------------	--------------------	----------------------	---------------------	--------------------	---------------------	--------------------	--------------------	--------------------	-----------------------

Cord finishes

Standard Vinyl

SVB BLACK	SVW WHITE	SVT TRANSPARENT
--------------	--------------	--------------------