


GENERAL INFORMATION

The Orbita Noctis Circle is a striking pendant fixture designed to deliver vibrant 360° RGB illumination in a sleek, seamless ring. Its uniform light output and clean polycarbonate profile make it ideal for modern commercial, hospitality, and event spaces where full-circle visual impact and ambient glow are essential.

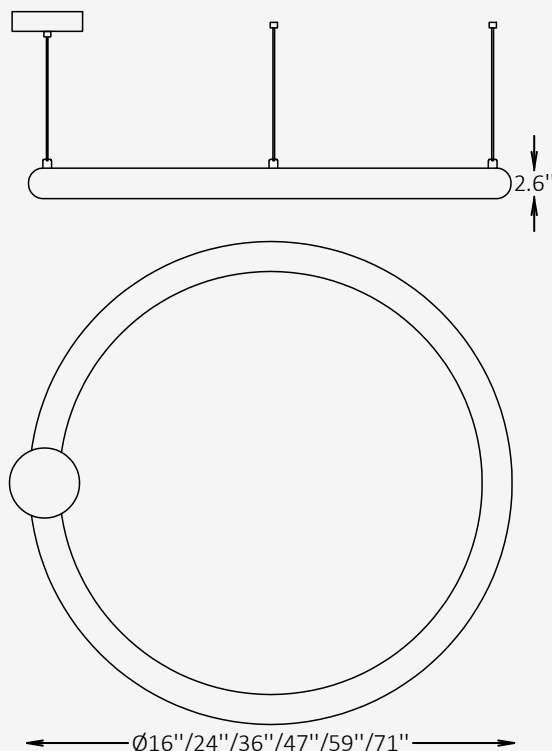

SPECIFICATIONS

Material	Polycarbonate
Diameter	16" / 23" / 35" / 47" / 59" / 71"
Profile Height	2.6"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	25W / 36W / 60W / 80W / 100W / 120W
CCT	RGB
CRI	80 / 90
Dimming & Driver	Integral, 0-10V
Light Distribution	360°
IP Rating	IP 20
Warranty	5 years
Finishes	White

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage		Light Distribution
<input checked="" type="checkbox"/> OTO Circle / Pendant	<input type="checkbox"/> 16 16" / 25 W	<input type="checkbox"/> 47 47" / 80 W	<input checked="" type="checkbox"/> B36 Beam 360°
	<input type="checkbox"/> 23 23" / 36 W	<input type="checkbox"/> 59 59" / 100 W	
	<input type="checkbox"/> 35 35" / 60 W	<input type="checkbox"/> 71 71" / 120 W	
Dimming	CRI	Canopy Finish Options	Cord Finish Options
<input type="checkbox"/> NN Non-Dimmable	<input type="checkbox"/> CR8 80	<input type="checkbox"/> WH White	<input type="checkbox"/> WH White
<input type="checkbox"/> DM 0-10V	<input type="checkbox"/> CR9 90	<input type="checkbox"/> BL Black	<input type="checkbox"/> BL Black
Mounting	Cord Length		
<input type="checkbox"/> CT Central Canopy Suspension	<input type="checkbox"/> L11 118" (adjustable)		
<input type="checkbox"/> MO Multi-Point Suspension	<input type="checkbox"/> Cus Custom on request		
*Central Canopy Suspension Mounting is only available for diameters of 23" / 35" / 47" / 59"			

Finishes

RAL finishes



RAL K7 CLASSIC COLORS

(80-95% GLOSS): RAL _ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Photometric Data

