




GENERAL INFORMATION


The A-FOCUS is a linear lighting module for the MODARI A-Track Core magnetic system, offering precise, even illumination with selectable beam angles for task or accent use. Its slim aluminum profile integrates cleanly into the track, maintaining a modern, unobtrusive aesthetic with strong visual comfort. With multiple dimming options and finish choices, A-FOCUS adapts easily to a wide range of functional and decorative lighting compositions.

MODULE SPECIFICATIONS

Material	Aluminum
Diameter	1.4" / 1.97" / 2.76"
Height	1.96" / 2.55" / 3.3"
Length	3.15" / 5.51" / 6.38"
Input Voltage	DC 24V
Light Source Type	LED
Power	5W / 10W
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Beam Angle	18° / 20° / 24° / 30° / 36° / 40°
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

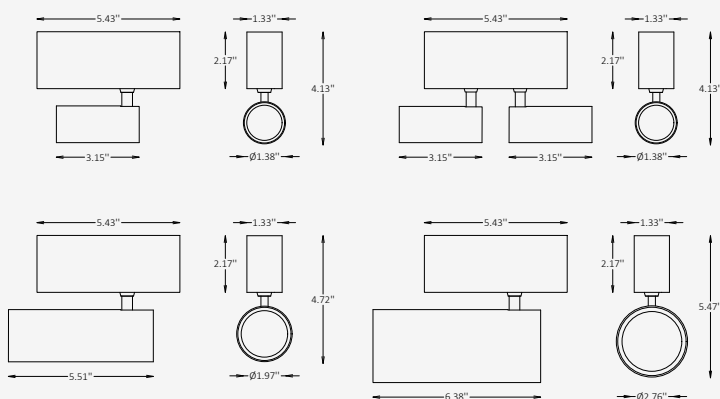

OTHER VERSIONS AVAILABLE

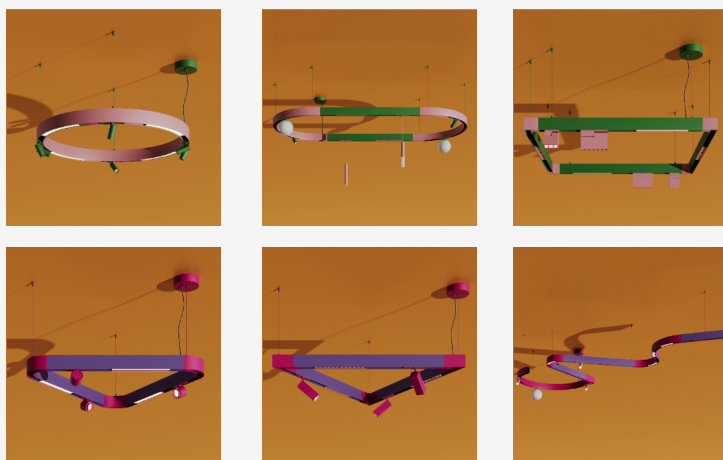

CERTIFICATION



A-Focus Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Diameter / Length / Wattage / Lumens	CCT
☒ FCS A-Focus Module	☐ D24 DC 24V ☐ Cus Custom on request	☐ 1 1.38" / 3.15" / 5 W / 526 lm ☐ 1D 2 x 1.4" / 3.15" / 5 W / 1052 lm ☐ 2 1.97" / 5.51" / 10 W / 682 lm ☐ 3 2.76" / 6.38" / 10 W / 1343 lm	☐ 27 2700K ☐ 30 3000K ☐ 40 4000K ☐ Cus Custom on request
Beam Angle	CRI	Dimming	Finish Option
☐ B20 20° ☐ B30 Available only for the 30° 1 and 1D modules* ☐ B40 40°	☐ CR8 80 ☐ CR9 90	☐ NN Non-Dimmable ☐ DM0 0-10V ☐ DM1 1-10V ☐ DL DALI ☐ TR TRIAC	☐ ST Standard ☐ WE Wood effect ☐ MC Metallic ☐ Cus Custom on request
☐ B18 18° ☐ B24 Available only for the 24° 2 and 3 modules* ☐ B36 36°			

A-Focus Module Finishes

Standard finishes

RAL 4012	RAL 4005	RAL 4010	RAL 1012	RAL 1021	RAL 2000	RAL 2008	RAL 2002	RAL 3003	RAL 3011	RAL 3015	RAL 3014
RAL 3017	RAL 3018	RAL 5007	RAL 5019	RAL 5024	RAL 6011	RAL 6001	RAL 6017	RAL 6035	RAL 3012	RAL 1001	RAL 1015
						RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _ All RAL Classic colors are available with no setup fee. On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).					
RAL 9010	RAL 9016	RAL 9003	RAL 9022	RAL 7004	RAL 9005						



Wood-effect finishes

WO WHITE OAK	OA OAK	HO HONEY OAK	MP MAPLE	WT WALNUT	MG MAHOGANY	DO DARK OAK	ES ESPRESSO


Metallic finishes

SB SHINY BRONZE	GL GOLD

Photometric Data

A-Focus 1 / 20°


20°



h(m)	E(lx)	Φ(m)
1	3146	Φ0.34
2	786	Φ0.68
3	349	Φ1.02
4	196	Φ1.36
5	125	Φ1.71

A-Focus 1 / 30°


30°



h(m)	E(lx)	Φ(m)
1	3121	Φ0.36
2	780	Φ0.72
3	346	Φ1.08
4	195	Φ1.45
5	124	Φ1.81

A-Focus 1 / 40°


40°



h(m)	E(lx)	Φ(m)
1	1963	Φ0.43
2	490	Φ0.87
3	218	Φ1.30
4	122	Φ1.74
5	78	Φ2.17

A-Focus 1D / 20°


10°



h(m)	E(lx)	Φ(m)
1	9750	Φ0.20
2	2437	Φ0.40
3	1083	Φ0.60
4	609	Φ0.80
5	390	Φ1.00

A-Focus 1D / 30°


20°



h(m)	E(lx)	Φ(m)
1	6022	Φ0.25
2	1505	Φ0.50
3	669	Φ0.75
4	376	Φ1.00
5	240	Φ1.25

A-Focus 1D / 40°


40°



h(m)	E(lx)	Φ(m)
1	1963	Φ0.43
2	490	Φ0.87
3	218	Φ1.30
4	122	Φ1.74
5	78	Φ2.17

A-Focus 2 / 18°


18°



h(m)	E(lx)	Φ(m)
1	4902	Φ0.32
2	1226	Φ0.65
3	544	Φ0.98
4	306	Φ1.31
5	196	Φ1.63

A-Focus 2 / 24°


24°



h(m)	E(lx)	Φ(m)
1	4186	Φ0.39
2	1047	Φ0.79
3	465	Φ1.19
4	261	Φ1.58
5	167	Φ1.98

A-Focus 2 / 36°


36°



h(m)	E(lx)	Φ(m)
1	2077	Φ0.64
2	519	Φ1.29
3	230	Φ1.94
4	129	Φ2.58
5	83	Φ3.23

A-Focus 3 / 18°


18°



h(m)	E(lx)	Φ(m)
1	9062	Φ0.30
2	2266	Φ0.61
3	1007	Φ0.91
4	566	Φ1.22
5	362	Φ1.52

A-Focus 3 / 24°


24°



h(m)	E(lx)	Φ(m)
1	5630	Φ0.46
2	1408	Φ0.93
3	625	Φ1.39
4	351	Φ1.86
5	225	Φ2.32

A-Focus 3 / 36°

36°



h(m)	E(lx)	Φ(m)
1	3427	Φ0.68
2	856	Φ1.37
3	380	Φ2.06
4	214	Φ2.75
5	137	Φ3.44