




GENERAL INFORMATION


The VELTO is a sculptural acoustic pendant that combines refined illumination with effective sound absorption, using its elongated geometric form to enhance both visual clarity and acoustic comfort. Crafted from a precision-formed aluminum body with high-density acoustic fiber, it offers flexible downlight or up-and-down distributions and multiple size, output, and finish options—providing a versatile, design-forward solution for modern hospitality, workspace, and residential interiors.

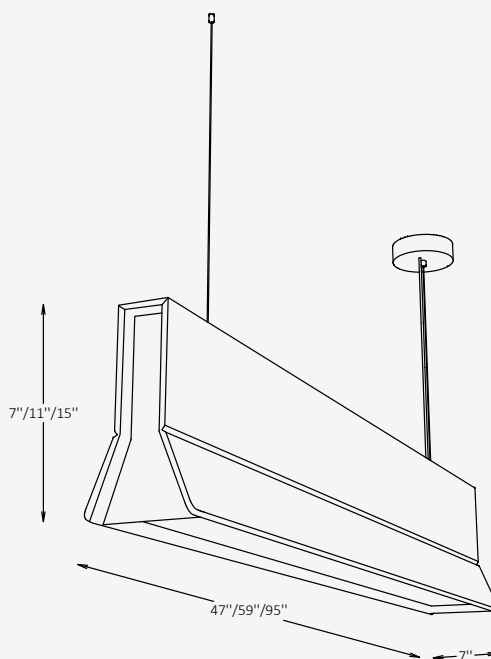

SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Length	47" / 59" / 95"
Height	7" / 11" / 15"
Width	7"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	40W+60W / 50W+80W / 80W+120W
LED Output	105 lm/W
CCT	3000K / 3500K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Down / Beam Up & Down
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

OTHER VERSIONS AVAILABLE

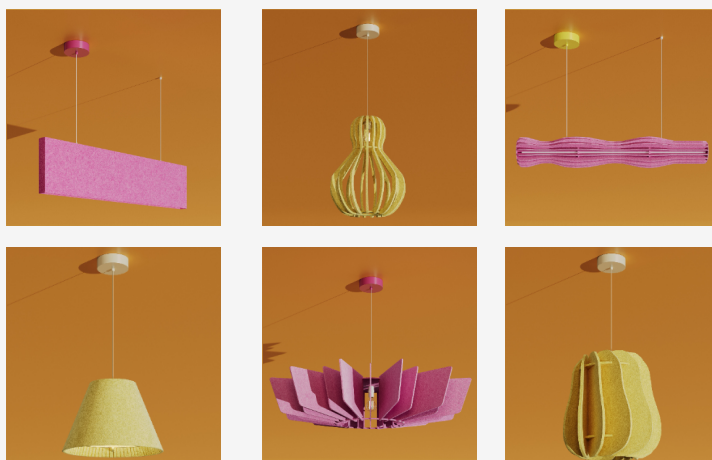

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Length / Height / Wattage / Lumens		CCT
☒ VLT Acoustic / Pendant	*Direct emission ☐ 47-7D 47" / 7" / 60W / 6300 lm ☐ 47-11D 47" / 11" / 60W / 6300 lm ☐ 47-15D 47" / 15" / 60W / 6300 lm ☐ 59-7D 59" / 7" / 80W / 8400 lm ☐ 59-11D 59" / 11" / 80W / 8400 lm ☐ 59-15D 59" / 15" / 80W / 6300 lm ☐ 95-7D 95" / 7" / 120W / 12,600 lm ☐ 95-11D 95" / 11" / 120W / 12,600 lm ☐ 95-15D 95" / 15" / 120W / 12,600 lm	*Direct & Indirect emission ☐ 47-7DI 47" / 7" / 60W, 6300 lm / 40W, 4200 lm ☐ 47-11DI 47" / 11" / 60W, 6300 lm / 40W, 4200 lm ☐ 47-15DI 47" / 15" / 60W, 6300 lm / 40W, 4200 lm ☐ 59-7DI 59" / 7" / 80W / 8400 lm / 40W, 4250 lm ☐ 59-11DI 59" / 11" / 80W / 8400 lm / 40W, 4250 lm ☐ 59-15DI 59" / 15" / 80W / 6300 lm / 40W, 4250 lm ☐ 95-7DI 95" / 7" / 120W / 12,600 lm / 80W / 8400 lm ☐ 95-11DI 95" / 11" / 120W / 12,600 lm / 80W / 8400 lm ☐ 95-15DI 95" / 15" / 120W / 12,600 lm / 80W / 8400 lm	☐ 30 3000K ☐ 35 3500K ☐ 40 4000K ☐ 50 5000K
Dimming	Acoustic Fiber Finish Option	Canopy Finish Option	Cord Length
☐ NN Non-Dimmable ☐ DM 0-10V	☐ AF Acoustic fibers	☐ ST Standard	☐ L5 59" (adjustable) ☐ Cus Custom on request
Cord Finish Option	Mounting		
☐ SVW White ☐ SVB Black ☐ SVT Transparent	☒ MO Multi-Point Suspension		

Finishes

Acoustic fiber finishes



Standard finishes



Cord finishes



DBI
MILK

DBI
MILK

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL _ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

