




SPECIFICATIONS

Material	Alabaster sphere + Aluminum				
Height	12"				
Width	5"				
Depth	4.5"				
Input Voltage	110-277V, 50-60 Hz				
Light Source Type	ype LED				
Power	5W				
LED Output	tput 120 lm/W				
CCT	2700K / 3000K / 4000K				
CRI	90				
Dimming & Driver	Integral, 0-10V				
Light Distribution	Directional Downlight				
IP Rating	IP 20				
Warranty	5 years				
Finishes	34 RAL finishes 8 wood-effect finishes 12 metallic finishes Custom on request*				

GENERAL INFORMATION

The ELO is a refined wall-mounted sconce that pairs a sculpted aluminum body with a luminous alabaster sphere, creating a warm, directional glow that balances decorative elegance with functional illumination. Designed for modern hospitality, residential, and commercial spaces, ELO offers a clean architectural silhouette, premium material expression, and versatile finish options—making it an elevated accent for interiors seeking both character and comfort.

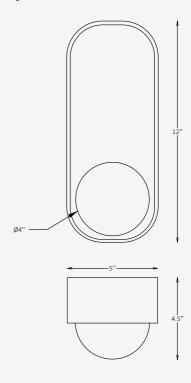

OTHER VERSIONS AVAILABLE



CERTIFICATION





Project	
	_
Notes	

Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

	Code Wattage / Lumens		сст		Dimming		
EL Wal	II		6 5 W / 600 lm		27 2700K 30		NN Non-Dimmable
			Custom on request		3000K 40 4000K Cus Custom on request		0-10V
Metal Body Finish Option Inner Panel Finish Option							
ST Star	ndard		ST Standard	Note: The color combination shown in the photo on the first page of this spec sheet is part of the exclusive A We Lighting Design Palette. This custom palette reflects our brand's identity and is available as a special finish option — A We Lighting Palette*.			
□ WE Woo	od effect		WE Wood effect				
Met Met	tallic		MC Metallic				
AW AW	∕E √e Lighting Palette*		AWE A We Lighting Palette*				
Cus Cus	s stom on request		Cus Custom on request				

Finishes

Standard finishes




Metallic finishes



Wood-effect finishes

Updated: 11/25/2025



(e.g., RAL 3003).