




GENERAL INFORMATION

The AURALIS pendant delivers expansive 300° beam coverage with a sleek, ultra-slim profile, seamlessly combining acoustic absorption and functional illumination. Crafted from 100% P.E.T. felt and polycarbonate, its refined design makes it ideal for modern commercial, educational, and hospitality spaces seeking both visual comfort and sound control. Offered in multiple sizes and finishes, AURALIS balances performance and aesthetics in open environments.

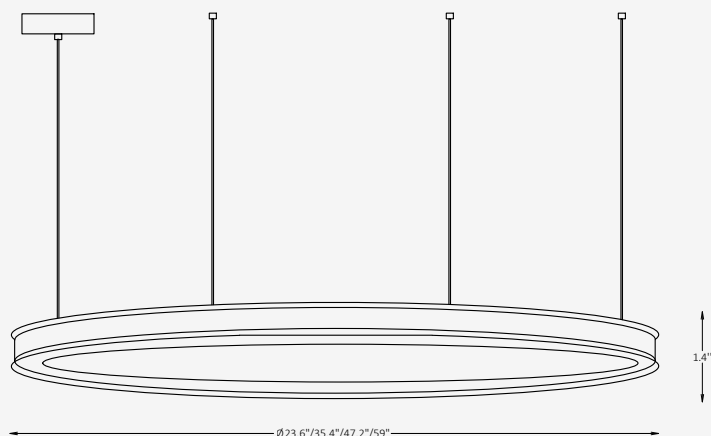

SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Diameter	23.6" / 35.4" / 47.2" / 59"
Height	1.4"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	32W / 40W / 70W / 80W
LED Output	70 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	300° (Beam Out)
Appliance Class	I
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

OTHER VERSIONS AVAILABLE



CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Wattage / Lumens		CCT
☒ ALS Acoustic / Pendant	☐ 22 23.6" / 32 W / 2240 lm	☐ 49 47.2" / 70 W / 4900 lm	☐ 30 3000K
	☐ 28 35.4" / 40 W / 2800 lm	☐ 56 59" / 80 W / 5600 lm	☐ 35 3500K
			☐ 40 4000K
Light Distribution	Dimming	Acoustic Fiber Finish Option	Profile Finish Option
☒ BIO 300° (Beam In and Out)	☐ NN Non-Dimmable	☐ AF Acoustic fibers	☐ ST Standard
	☐ DM 0-10V		
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
☐ ST Standard	☐ SVW White	☐ CT Central Canopy Suspension	☐ L5 59" (adjustable)
	☐ SVB Black	☐ MO Multi-Point Suspension	
	☐ SVT Transparent		

Finishes

Acoustic fiber finishes

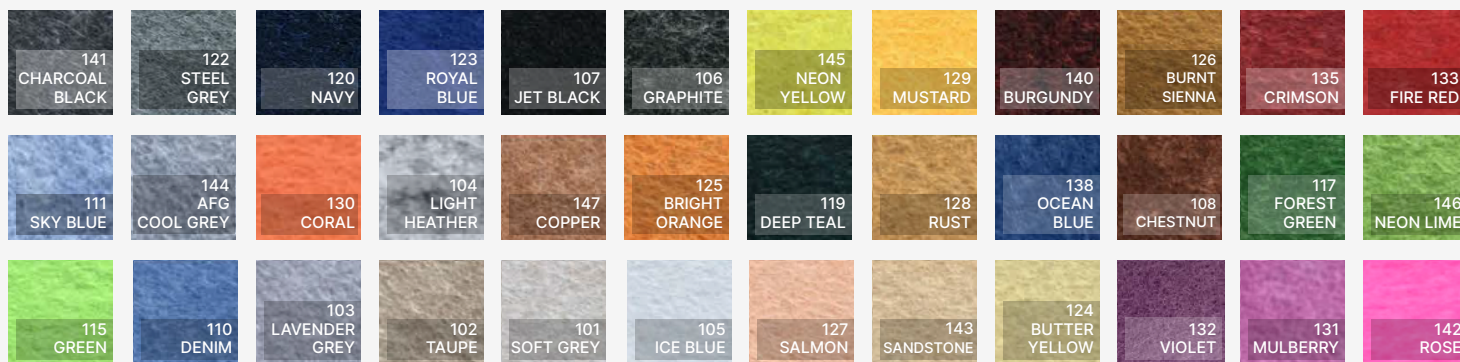

Standard finishes



Cord finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

