




GENERAL INFORMATION

The Ronde acoustic pendant combines architectural lighting performance with advanced sound-absorbing functionality. Crafted from 100% PET felt and finished with a refined aluminum structure, it provides balanced illumination and improved acoustic comfort in open spaces. Designed for offices, hospitality, and communal areas, Ronde delivers soft, even light with 120° direct distribution while reducing ambient noise. Available in 38 acoustic fiber finishes to harmonize lighting and interior design aesthetics.

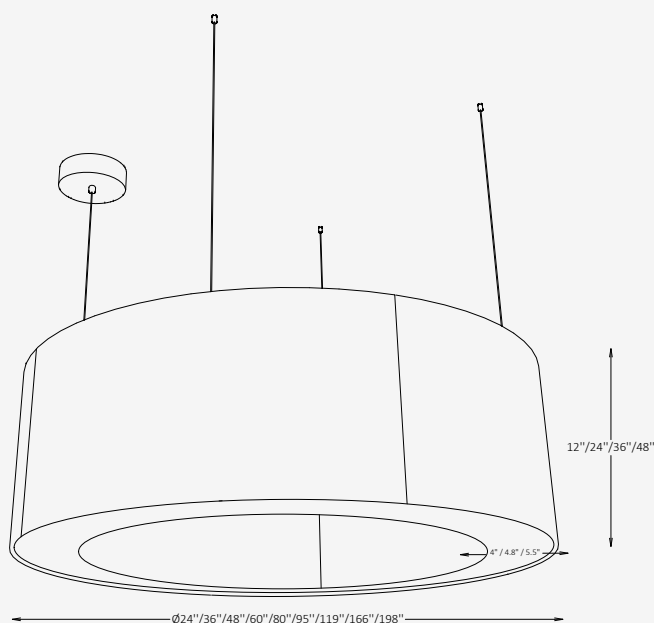

SPECIFICATIONS

Material	Aluminum, 100% P.E.T. Felt
Lens	Polycarbonate
Diameter	24.4" / 36.2" / 48" / 59" / 79" / 95" / 119" / 166" / 197"
Profile Width	4" / 4.8" / 5.5"
Profile Height	12" / 24" / 36" / 48"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	40W / 50W / 80W / 100W / 120W / 160W / 200W / 300W / 400W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	120° (Direct)
Appliance Class	I
IP Rating	IP 20
Finishes	38 acoustic fiber finishes
Warranty	5 years

OTHER VERSIONS AVAILABLE



CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter / Wattage / Lumens		Profile Height
☒ RND Acoustic / Pendant	☐ 34 24.4" / 40 W / 3400 lm ☐ 42 36.2" / 50 W / 4250 lm ☐ 68 48.0" / 80 W / 6800 lm ☐ 85 60" / 100 W / 8500 lm ☐ 102 79.5" / 120 W / 10,200 lm	☐ 136 95.3" / 160 W / 13,600 lm ☐ 170 119" / 200 W / 17,000 lm ☐ 255 166" / 300 W / 25,500 lm ☐ 340 197.6" / 400 W / 34,000 lm	☐ 12 12" ☐ 24 24" ☐ 36 36" ☐ 48 48"
Profile Width	CCT	Dimming	Acoustic Fiber Finish Option
☐ 4 4" ☐ 5 4.8" ☐ 6 5.5"	☐ 30 3000K ☐ 35 3500K ☐ 40 4000K	☐ NN Non-Dimmable ☐ DM 0-10V	☐ AF Acoustic fibers
Canopy Finish Option	Canopy Finish Option	Cord Length	
☐ ST Standard	☐ SVW White ☐ SVB Black ☐ SVT Transparent	☐ L11 118" (adjustable) ☐ Cus Custom on request	

Photometric Data

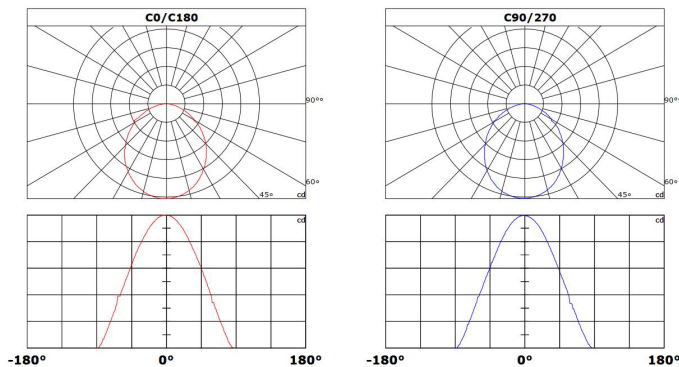

Height	Center lx	Diameter
1.m	3254.54 lx	338.18cm
2.m	813.64 lx	676.36cm
3.m	361.62 lx	1014.54cm
4.m	203.41 lx	1352.73cm
5.m	130.18 lx	1690.91cm
6.m	90.40 lx	2029.09cm
7.m	66.42 lx	2367.27cm
8.m	50.85 lx	2705.45cm
9.m	40.18 lx	3043.63cm
10.m	32.55 lx	3381.82cm
11.m	26.90 lx	3720.00cm
12.m	22.60 lx	4058.18cm
13.m	19.26 lx	4396.36cm
14.m	16.60 lx	4734.54cm
15.m	14.46 lx	5072.72cm
16.m	12.71 lx	5410.91cm

Beam Angle:118.80°(50%Imax)

Project


Notes

Finishes


Acoustic fiber finishes



Standard finishes



Cord finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

