




GENERAL INFORMATION

The VIVRE pendant expresses a sense of rhythm and lightness through its sculptural, open-frame design. Crafted from precision-formed stainless steel with a frosted acrylic diffuser, it delivers a warm and focused illumination that enhances outdoor spaces with elegance and durability. Its elongated, organic profile evokes natural harmony while maintaining architectural balance, making VIVRE ideal for patios, terraces, and contemporary hospitality environments seeking refined visual character and lasting performance.

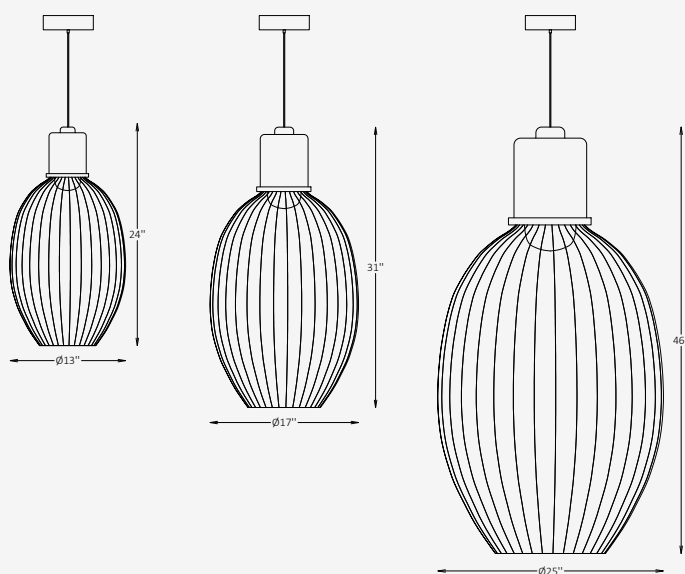

SPECIFICATIONS

Material	Stainless steel
Lens	Frosted, Acrylic
Diameter	13" / 17" / 25"
Height	24" / 31" / 46"
Light Source Type	LED
Power	12W / 15W / 20W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	2700K / 3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Down
IP Rating	IP 65
Warranty	5 years
Finishes	28 standard finishes 12 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Height	Material	CCT
<input checked="" type="checkbox"/> VRE Outdoor Pendant	<input type="checkbox"/> 13 13" / 24" <input type="checkbox"/> 17 17" / 31" <input type="checkbox"/> 25 25" / 46" <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> SS Stainless Steel <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 27 2700K <input type="checkbox"/> 30 3000K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 50 5000K
Wattage / Lumens	Light Distribution	Dimming	Finish Option
<input type="checkbox"/> 14 12 W / 1440 lm <input type="checkbox"/> 18 15 W / 1800 lm <input type="checkbox"/> 24 20 W / 2400 lm <input type="checkbox"/> Cus Custom on request	<input checked="" type="checkbox"/> BD Beam Down	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V	<input type="checkbox"/> ST Standard <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request
Canopy Finish Option	Cord Length	Cord Finish Option	
<input type="checkbox"/> ST Standard <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> L11 118" (adjustable) <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> WH White <input type="checkbox"/> BL Black <input type="checkbox"/> Cus Custom on request	

Finishes

Standard finishes

RAL 4012	RAL 4005	RAL 4010	RAL 1012	RAL 1021	RAL 2000	RAL 2008	RAL 2002	RAL 3003	RAL 3011	RAL 3014	RAL 3017
RAL 3018	RAL 5007	RAL 5019	RAL 5024	RAL 6011	RAL 6001	RAL 6017	RAL 3012	RAL 1001	RAL 1015	RAL 9010	RAL 9016
RAL 9003	RAL 9022	RAL 7004	RAL 9005								

Metallic finishes

001 SUNLIT GOLD	003 IMPERIAL GOLD	005 DESERT BRONZE	007 AMBER ALLOY	009 SIENNA BRONZE	014 REDWOOD GLOW	017 AGED CITRON	018 ARCTIC STEEL	019 CAMEL BRASS	020 CEDAR FLAME	021 CHARRED OAK	023 OBSIDIAN STEEL
-----------------------	-------------------------	-------------------------	-----------------------	-------------------------	------------------------	-----------------------	------------------------	-----------------------	-----------------------	-----------------------	--------------------------

Cord finishes

SVB BLACK	SVW WHITE
--------------	--------------

RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL _ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

