




GENERAL INFORMATION


The Orbita Aura Circle combines refined geometry with a clean, minimal aesthetic, delivering soft, downward illumination ideal for contemporary interior environments. With its ultra-slim ring profile and evenly diffused Beam Down light output, this pendant fixture provides both functional performance and visual lightness. Engineered with precision-machined aluminum and a polycarbonate lens, it is available in a wide range of diameters and finishes to meet the needs of architectural, hospitality, or commercial applications.

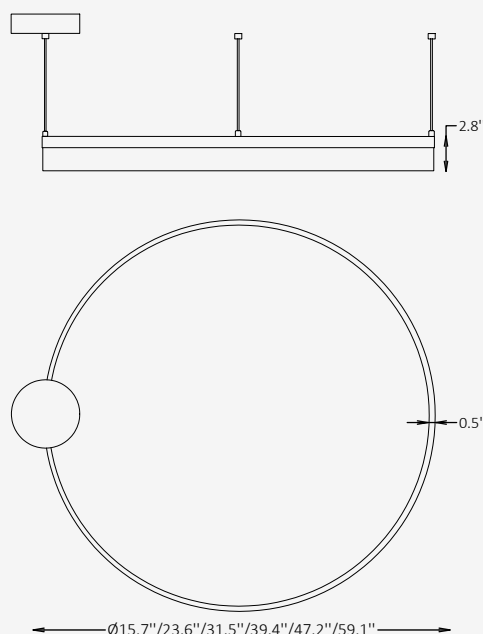

SPECIFICATIONS

Material	Aluminum
Lens	Polycarbonate
Diameter	15.7" / 23.6" / 31.5" / 39.4" / 47.2" / 59.1"
Profile Height	2.8"
Profile Width	0.5"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	15W / 25W / 35W / 45W / 50W / 60W
LED Output	70 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Down
IP Rating	IP 20
Warranty	5 years
Finishes	Satin White / Satin Black / RAL finishes

OTHER VERSIONS AVAILABLE

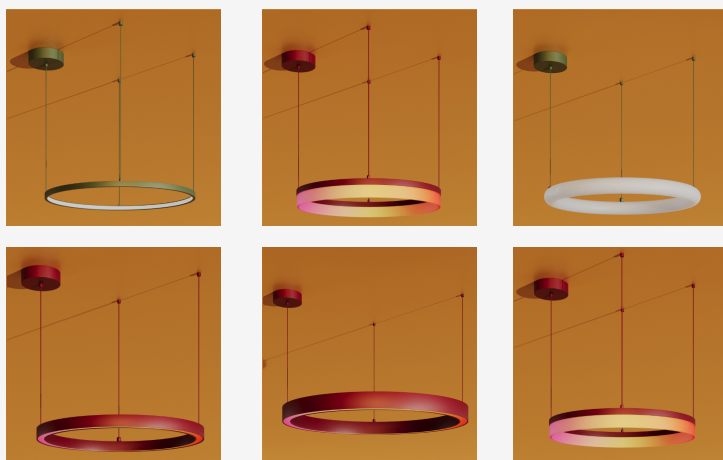

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Wattage / Lumens		CCT
☒ OTA Circle / Pendant	☐ 16 15.7" / 15 W / 1050 lm ☐ 23 23.6" / 25 W / 1750 lm ☐ 31 31.5" / 35 W / 2450 lm	☐ 39 39.4" / 45 W / 3150 lm ☐ 47 47.2" / 50 W / 3500 lm ☐ 59 59.1" / 60 W / 4200 lm	☐ 30 3000K ☐ 35 3500K ☐ 40 4000K
Light Distribution	Dimming	CRI	Profile Finish Option
☒ BD Beam Down	☐ NN Non-Dimmable ☐ DM 0-10V	☒ CR9 90	☐ SW Satin White ☐ SB Satin Black ☐ RAL RAL Finishes
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
☐ WH White ☐ BL Black ☐ RAL RAL Finishes	☐ SVW White ☐ SVB Black	☐ CT Central Canopy Suspension ☐ MO Multi-Point Suspension	☐ L6 59" (adjustable) ☐ Cus Custom on request

Finishes


Standard finishes



RAL finishes

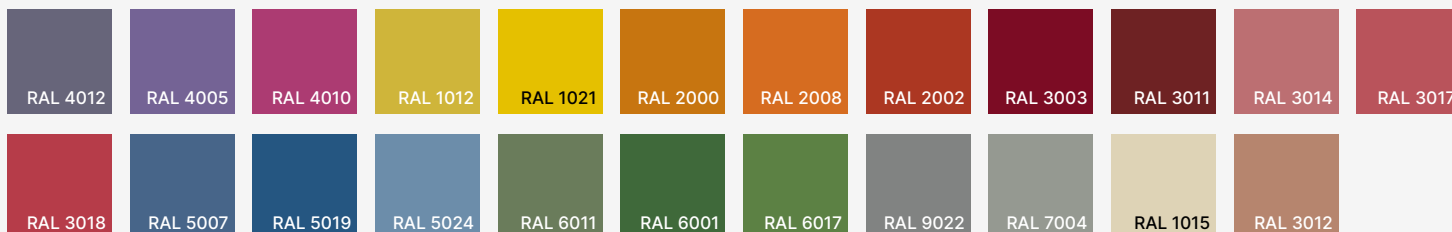

Cord finishes



RAL K7 CLASSIC COLORS
(80-95% GLOSS): RAL _ _ _ _

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Photometric Data

