




SPECIFICATIONS

Material	Die-cast aluminium + PMMA
Lens	Clear, Acrylic
Diameter	6.6"
Total Height	31.5" / 39.4"
Light Source Type	LED
Power	20W / 25W / 30W
Input Voltage	110-277V, 50-60 Hz
LED Output	70 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	80
Dimming & Driver	Integral, 0-10V / PWM / DALI
Light Distribution	Type V 360° symmetrical light distribution
IP Rating	IP 65
IK Rating	IK 08
Warranty	1 years
Finishing	Black (smooth glossy)

GENERAL INFORMATION

PLIN is an outdoor bollard luminaire defined by a clean cylindrical form and a durable die-cast aluminum body with a clear acrylic diffuser. The minimalist design delivers a balanced visual presence while ensuring long-lasting performance in outdoor environments. Its refined geometry integrates naturally into contemporary architectural and landscape settings. Designed to provide uniform 360° symmetrical illumination, PLIN is well suited for pathways, walkways, gardens, and public outdoor spaces where reliable and visually comfortable lighting is required.

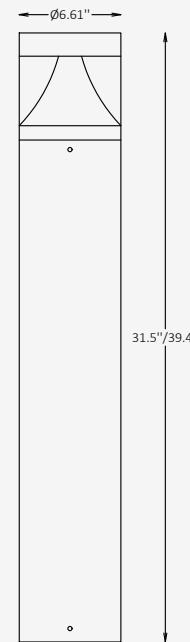

OTHER VERSIONS AVAILABLE



CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> PLN-B Bollard	<input checked="" type="checkbox"/> 6 6.6"	<input type="checkbox"/> 31 31.5" <input type="checkbox"/> 39 39.4"	<input checked="" type="checkbox"/> AL Die-cast aluminium
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> 22 2200K	<input type="checkbox"/> 14 20 W / 1400 lm	<input checked="" type="checkbox"/> LD5 Type V 360° symmetrical light distribution	<input type="checkbox"/> NN Non-Dimmable
<input type="checkbox"/> 27 2700K	<input type="checkbox"/> 17 25 W / 1750 lm		<input type="checkbox"/> DM 0-10V
<input type="checkbox"/> 30 3000K	<input type="checkbox"/> 21 30 W / 2100 lm		<input type="checkbox"/> PWM PWM
<input type="checkbox"/> 40 4000K			<input type="checkbox"/> DL DALI
<input type="checkbox"/> 50 5000K			
Appliance Class	Body Finish Option	Mounting	
<input type="checkbox"/> AC-I Class I	<input checked="" type="checkbox"/> RAL 9005 RAL 9005 (smooth glossy)	<input checked="" type="checkbox"/> SM Surface-mounted	
<input type="checkbox"/> AC-II Class II			

Finishes

Standard finishes



RAL 9005