



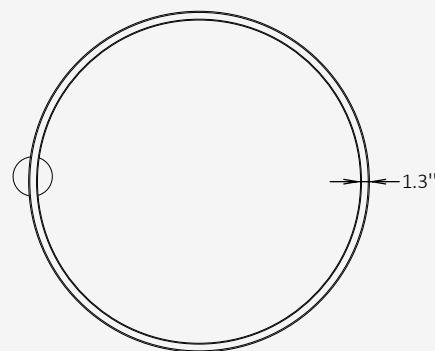

GENERAL INFORMATION

The Orbita Halo Circle is a striking circular pendant luminaire designed to deliver clean, uniform downlight with contemporary elegance. Engineered from precision-formed aluminum and equipped with an integrated LED module, it provides high-performance illumination ideal for hospitality, commercial, and modern residential applications. Available in multiple diameters and finishes, the fixture's slim, minimalist profile makes it a refined solution for open spaces, conference rooms, and statement installations.

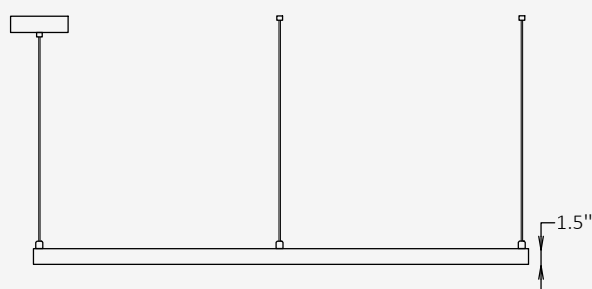


← Ø23.6"/35.4"/47.2"/59.1"/78.7"/98.4"/118.1"/157.5"/196.9" →

SPECIFICATIONS

Material	Aluminum
Lens	Polycarbonate
Diameter	23.6" / 35.4" / 47.2" / 59.1" / 78.7" / 98.4" / 118.1" / 157.5" / 196.9"
Profile Height	1.5"
Profile Width	1.3"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	40W / 50W / 80W / 100W / 120W / 160W / 200W / 300W / 400W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Down
IP Rating	IP 20
Warranty	5 years
Finishes	Satin White / Satin Black / RAL finishes

OTHER VERSIONS AVAILABLE

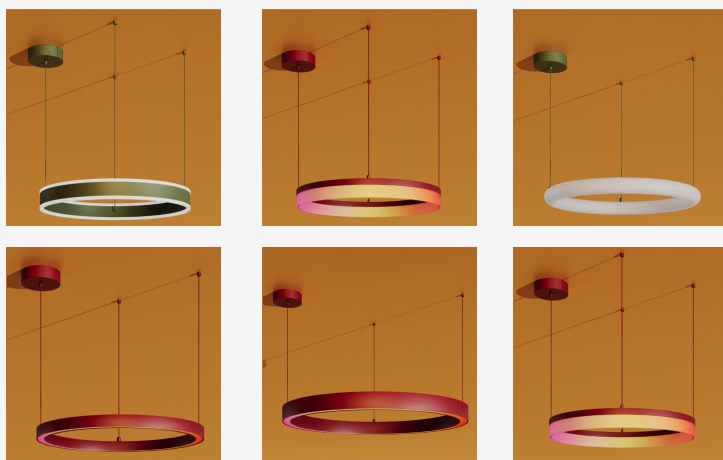

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


Code	Diameter Ø / Wattage / Lumens		CCT
☒ OTH Circle / Pendant	☐ 23 23.6" / 40 W / 3400 lm ☐ 35 35.4" / 50 W / 4250 lm ☐ 47 47.2" / 80 W / 6800 lm ☐ 59 59.1" / 100 W / 8500 lm ☐ 78 78.7" / 120 W / 10,200 lm	☐ 98 98.4" / 160 W / 13,600 lm ☐ 118 118" / 200 W / 17,000 lm ☐ 157 157.5" / 300 W / 25,500 lm ☐ 196 196.9" / 400 W / 34,000 lm	☐ 30 3000K ☐ 35 3500K ☐ 40 4000K
Light Distribution	Dimming	CRI	Profile Finish Option
☒ BD Beam Down	☐ NN Non-Dimmable ☐ DM 0-10V	☒ CR9 90	☐ SW Satin White ☐ SB Satin Black ☐ RAL RAL Finishes
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
☐ WH White ☐ BL Black ☐ RAL RAL Finishes	☐ SVW White ☐ SVB Black	☐ CT Central Canopy Suspension ☐ MO Multi-Point Suspension *Central Canopy Suspension Mounting is only available for diameters of 23" / 35" / 47" / 59"	☐ L6 59" (adjustable) ☐ Cus Custom on request

Finishes


Standard finishes



RAL finishes

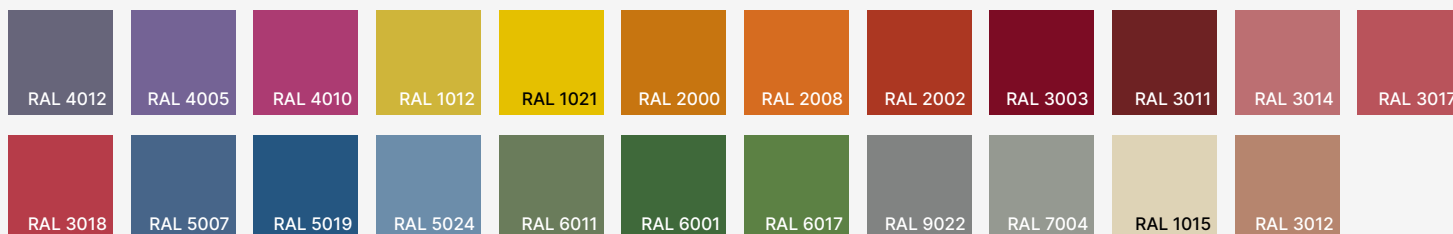


Cord finishes



RAL K7 CLASSIC COLORS
(80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Photometric Data

