




## GENERAL INFORMATION

BRIQ G is a low-profile outdoor bollard luminaire defined by its compact cubic form and clear architectural proportions. The solid aluminum housing and continuous luminous top create a grounded, monolithic presence while maintaining visual simplicity and durability for exterior use. Designed to deliver uniform ambient illumination with a symmetrical Type V, 360° light distribution, BRIQ G is ideal for courtyards, terraces, pathways, and landscape settings where subtle guidance, visual comfort, and a refined contemporary character are required.

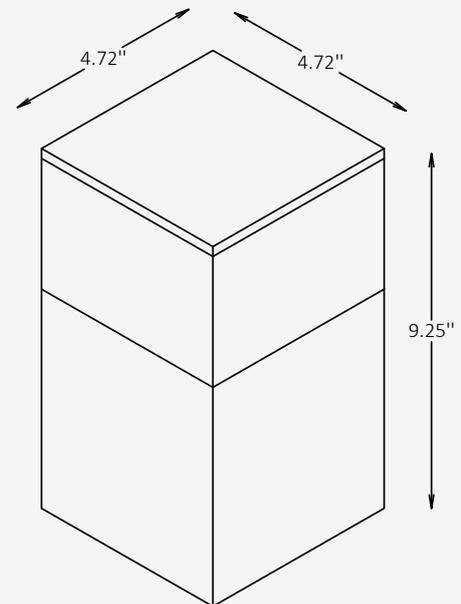

## SPECIFICATIONS

Material	Aluminium
Lens	Acrylic
Height	9.25"
Length	4.72"
Width	4.72"
Light Source Type	LED
Power	5W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	3000K / 4000K / 6000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V 360° symmetrical
IP Rating	IP 65
Warranty	5 years
Finishing	16 standard finishes

## OTHER VERSIONS AVAILABLE



## CERTIFICATION




## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height / Length / Width	Material	CCT
<input checked="" type="checkbox"/> <b>BRQ-G</b> Bollard	<input checked="" type="checkbox"/> <b>9</b> 9.25" / 4.72" / 4.72"	<input checked="" type="checkbox"/> <b>AL</b> Aluminium	<input type="checkbox"/> <b>30</b> 3000K <input type="checkbox"/> <b>40</b> 4000K <input type="checkbox"/> <b>60</b> 6000K
Wattage / Lumens	Light Distribution	Dimming	Body Finish Option
<input checked="" type="checkbox"/> <b>6</b> 5 W / 600 lm	<input checked="" type="checkbox"/> <b>LD5</b> Type V 360° symmetrical	<input type="checkbox"/> <b>NN</b> Non-Dimmable <input type="checkbox"/> <b>DM</b> 0-10V	<input type="checkbox"/> <b>ST</b> Standard <input type="checkbox"/> <b>Cus</b> Custom on request
Finish Type	Mounting		
<input type="checkbox"/> <b>GL</b> Glossy <input type="checkbox"/> <b>MT</b> Matte	<input checked="" type="checkbox"/> <b>SM</b> Surface-mounted		

## Finishes

### Standard finishes

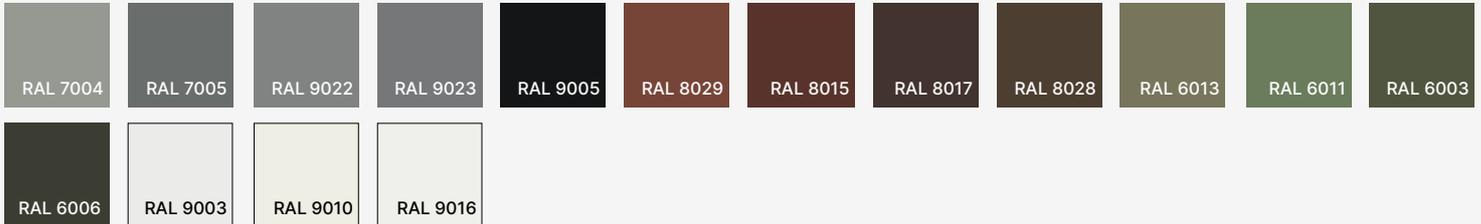

#### RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

