




GENERAL INFORMATION


TALUS is a compact outdoor bollard luminaire characterized by its bold linear profile and pronounced cantilevered head, creating a confident architectural expression with clear directional intent. The solid aluminum construction and crisp geometry emphasize material strength while ensuring durability in demanding exterior conditions. Designed to provide controlled, downward illumination with a symmetrical Type V distribution, TALUS is well suited for pathways, entrances, and landscape environments where precise light placement, visual comfort, and a strong contemporary identity are essential.

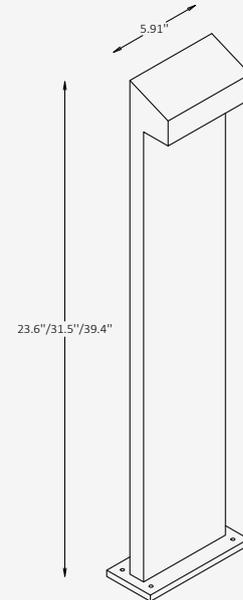

SPECIFICATIONS

Material	Aluminium
Lens	Tempered glass
Height	23.6" / 31.5" / 39.4"
Length	5.91"
Light Source Type	LED
Power	12W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	3000K / 4000K / 6000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V – symmetrical, downward
IP Rating	IP 65
Warranty	5 years
Finishing	34 RAL finishes

OTHER VERSIONS AVAILABLE

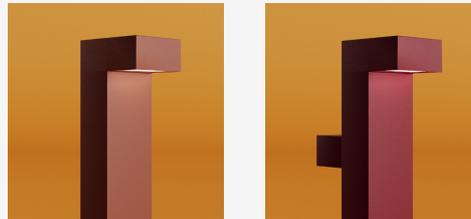

CERTIFICATION



Project

Notes

Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height	Material	CCT
<input checked="" type="checkbox"/> TLS Bollard	<input type="checkbox"/> 23 23.6" <input type="checkbox"/> 31 31.5" <input type="checkbox"/> 39 39.4"	<input checked="" type="checkbox"/> AL Aluminium	<input type="checkbox"/> 30 3000K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 60 6000K
Wattage / Lumens	Light Distribution	Dimming	Body Finish Option
<input checked="" type="checkbox"/> 14 12 W / 1440 lm	<input checked="" type="checkbox"/> LD5 Type V – symmetrical, downward	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V	<input type="checkbox"/> ST Standard <input type="checkbox"/> Cus Custom on request
Finish Type	Mounting		
<input type="checkbox"/> GL Glossy <input type="checkbox"/> MT Matte	<input checked="" type="checkbox"/> SM Surface-mounted		

Finishes

Standard finishes

