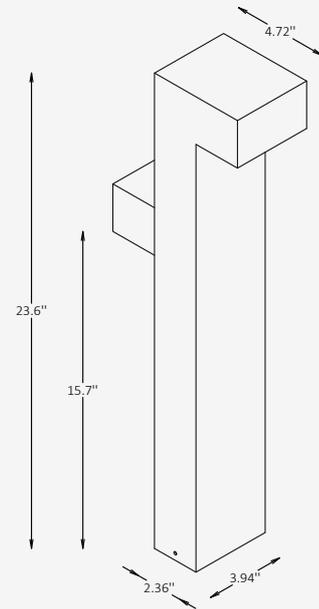## GENERAL INFORMATION

NODEX+ is a compact outdoor bollard luminaire that expands on the sharp geometric language of the NODEX design, featuring an offset dual-aperture configuration that reinforces its strong architectural presence. The solid aluminum body and precise cut-out detailing maintain a clean, disciplined form while ensuring long-term durability in exterior environments. Designed to deliver enhanced, controlled downward illumination with a symmetrical Type V distribution, NODEX+ is well suited for pathways, entrances, and landscape applications where increased light output, visual guidance, and glare control are essential.

SPECIFICATIONS

Material	Aluminium
Lens	Acrylic
Height	23.6''
Length	3.94''
Width	2.36''
Light Source Type	LED
Power	2 x 5W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	3000K / 4000K / 6000K
CRI	80
Dimming & Driver	Integral, 0-10V
Light Distribution	Type V – symmetrical, downward
IP Rating	IP 65
Warranty	5 years
Finishing	34 RAL finishes

Dimensions: 4.72'', 23.6'', 15.7'', 2.36'', 3.94''

OTHER VERSIONS AVAILABLE

CERTIFICATION

ETL LISTED INTERTEK US

Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Height / Length / Width	Material	CCT
☑ **NDX+** Bollard	☑ **23** 23.6" / 3.94'' / 2.36''	☑ **AL** Aluminium	☐ **30** 3000K
			☐ **40** 4000K
			☐ **60** 6000K

Wattage / Lumens	Light Distribution	Dimming	Body Finish Option
☑ **6** 2 x 5 W / 2 x 600 lm	☑ **LD5** Type V – symmetrical, downward	☐ **NN** Non-Dimmable	☐ **ST** Standard
		☐ **DM** 0-10V	☐ **Cus** Custom on request*

Finish Type	Mounting		
☐ **GL** Glossy	☑ **SM** Surface-mounted		
☐ **MT** Matte			

Finishes

Standard finishes

RAL 7004	RAL 7005	RAL 9022	RAL 9023	RAL 9005	RAL 8029	RAL 8015	RAL 8017	RAL 8028	RAL 6013	RAL 6011	RAL 6003
RAL 6006	RAL 9003	RAL 9010	RAL 9016								

Updated: 01/22/2026

a-welighting.com │ +1 (307) 761-7154 │ sales@a-welighting.com
A We Lighting™ │ A We Light & Co, LLC Specifications are subject to change without notice