




SPECIFICATIONS


Material	Extruded Aluminum
Lens	Frosted, Acrylic
Diameter	4" / Custom on request*
Height	10" / 14"
Depth	5.2"
Light Source Type	LED
Power	12W / 20W / 26W
Input Voltage	110-277V, 50-60 Hz
LED Output	48 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Up & Down
IP Rating	IP 65
Warranty	5 years
Finishes	16 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*

GENERAL INFORMATION

THORNE W DUAL is a refined outdoor wall luminaire defined by its cylindrical form and layered material composition, combining metal, wood-effect finishes, and a softly diffused light band. The balanced proportions and precise detailing create a warm yet contemporary architectural presence on exterior façades. Designed to deliver both upward and downward illumination, THORNE W DUAL provides functional accent lighting while enhancing surface texture and spatial depth. Ideal for entrances, terraces, and exterior walls, it offers visual comfort, durability, and a distinctive character for residential and hospitality environments.

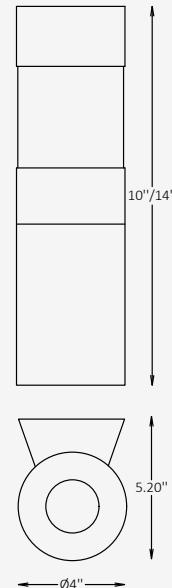

OTHER VERSIONS AVAILABLE

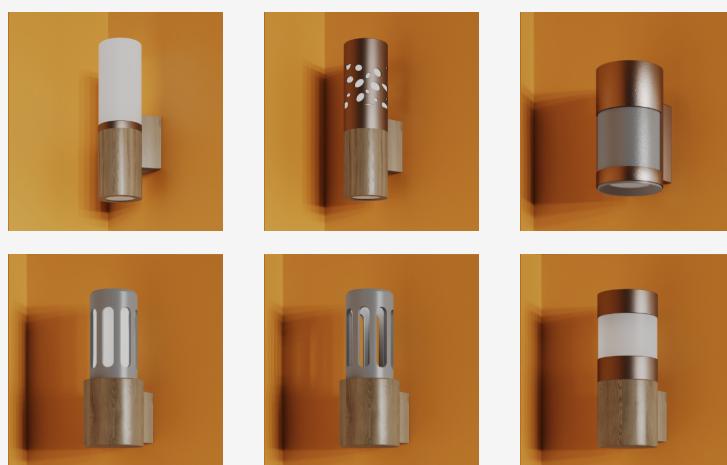

CERTIFICATION




Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> THR-WD Outdoor Wall	<input type="checkbox"/> 4 4" <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 10 10" <input type="checkbox"/> 14 14" <input type="checkbox"/> Cus Custom on request	<input checked="" type="checkbox"/> AL Extruded Aluminum
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> 22 2200K <input type="checkbox"/> 30 3000K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 50 5000K	<input type="checkbox"/> 2 12 W / 290 lm (up) / 290 lm (down) <input type="checkbox"/> 5 20 W / 500 lm (up) / 500 lm (down) <input type="checkbox"/> 6 26 W / 620 lm (up) / 620 lm (down) <input type="checkbox"/> Cus Custom on request	<input checked="" type="checkbox"/> BUD Beam Up & Down	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V
Body Finish Option	Base Finish Option		
<input type="checkbox"/> ST Standard <input type="checkbox"/> WE Wood effect <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> ST Standard <input type="checkbox"/> WE Wood effect <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request		

Finishes

Standard finishes

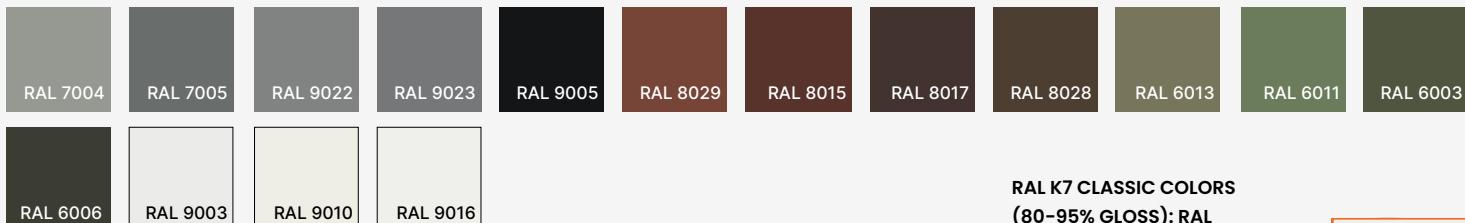

RAL K7 CLASSIC COLORS
(80-95% GLOSS): RAL- - - -

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Wood-effect finishes



Metallic finishes

