




## SPECIFICATIONS

Material	Stainless steel + Acrylic
Diffuser	Acrylic, Frosted
Diameter	11.8"
Height	9.84"
Light Source Type	LED
Power	15W / 20W / 30W
Input Voltage	110-277V, 50-60 Hz
LED Output	80 lm/W
CCT	2200K / 2700K / 3000K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Spot / Medium / Flood
IP Rating	IP 65
Warranty	5 years
Finishes	28 standard finishes 8 wood-effect finishes 12 metallic finishes Custom on request*

## GENERAL INFORMATION

The ARQEN Catenary System is a refined outdoor lighting solution designed for suspended cable installations across courtyards, walkways, and hospitality spaces. Its clean conical form delivers both visual rhythm and precise illumination. Constructed from stainless steel with a frosted acrylic diffuser, ARQEN is IP65 rated for durability in exterior environments. Multiple beam options — Spot, Medium and Flood — provide flexible lighting performance, while integrated 0-10V dimming ensures seamless control. Engineered for reliability and architectural impact, ARQEN balances technical precision with modern outdoor aesthetics.

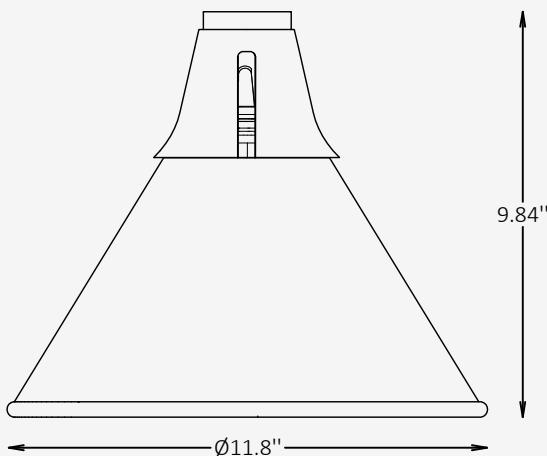

### Important:

Catenary steel wire rope and all associated installation hardware/accessories—including anchors, fittings, tensioning/turnbuckles, and attachment hardware are not included and shall be provided by others.

## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø	Height	Material
<input checked="" type="checkbox"/> <b>ARQN</b> Catenary System	<input type="checkbox"/> <b>11</b> 11.8" <input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>9</b> 9.84" <input type="checkbox"/> <b>Cus</b> Custom on request	<input checked="" type="checkbox"/> <b>SS</b> Stainless steel
CCT	Wattage / Lumens	Light Distribution	Dimming
<input type="checkbox"/> <b>22</b> 2200K <input type="checkbox"/> <b>30</b> 3000K <input type="checkbox"/> <b>35</b> 3500K <input type="checkbox"/> <b>40</b> 4000K <input type="checkbox"/> <b>50</b> 5000K <input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>12</b> 15 W / 1200 lm <input type="checkbox"/> <b>16</b> 20 W / 1600 lm <input type="checkbox"/> <b>24</b> 30 W / 2400 lm <input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>SP</b> Spot (20°) <input type="checkbox"/> <b>MD</b> Medium (25°) <input type="checkbox"/> <b>FL</b> Flood (45°) <input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>NN</b> Non-Dimmable <input type="checkbox"/> <b>DM</b> 0-10V
Metal Accent Finish Option	Shade Finish Option	Electrical Cable Finish Option	
<input type="checkbox"/> <b>ST</b> Standard <input type="checkbox"/> <b>WE</b> Wood effect <input type="checkbox"/> <b>MC</b> Metallic <input type="checkbox"/> <b>Cus</b> Custom on request	<input type="checkbox"/> <b>ST</b> Standard <input type="checkbox"/> <b>WE</b> Wood effect <input type="checkbox"/> <b>MC</b> Metallic <input type="checkbox"/> <b>Cus</b> Custom on request	<input checked="" type="checkbox"/> <b>BL</b> Black	

## Finishes

### Standard finishes



### Wood-effect finishes



### Metallic finishes



**RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_**

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

