




GENERAL INFORMATION


The VENTO pendant captures the essence of open-air design through its sculptural form and refined functionality. Crafted from durable stainless steel with a frosted acrylic diffuser, it delivers a soft, even beam ideal for outdoor environments. Its open-frame silhouette evokes movement and lightness while ensuring long-lasting performance in all weather conditions. Designed for versatility and elegance, VENTO harmonizes architectural precision with atmospheric illumination, making it a defining element for terraces, courtyards, and contemporary exterior spaces.

SPECIFICATIONS

Material	Stainless steel
Lens	Frosted, Acrylic
Diameter	12" / 18" / 24"
Height	16" / 23" / 32"
Light Source Type	LED
Power	12W / 15W / 20W
Input Voltage	110-277V, 50-60 Hz
LED Output	120 lm/W
CCT	2700K / 3000K / 3500K / 4000K / 5000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Direct
IP Rating	IP 65
Warranty	5 years
Finishes	28 standard finishes 12 metallic finishes Custom on request*

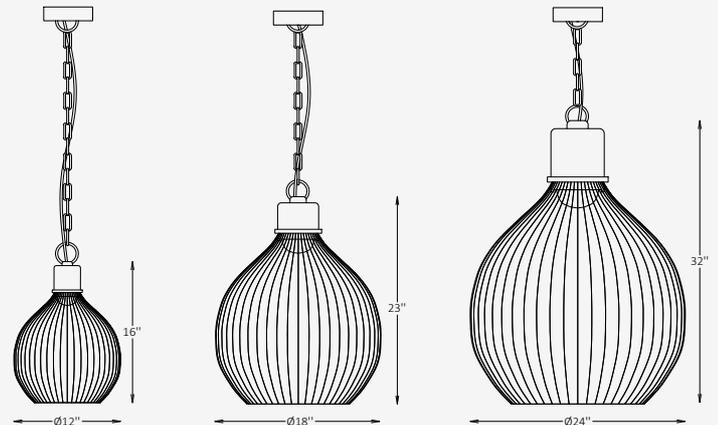

OTHER VERSIONS AVAILABLE

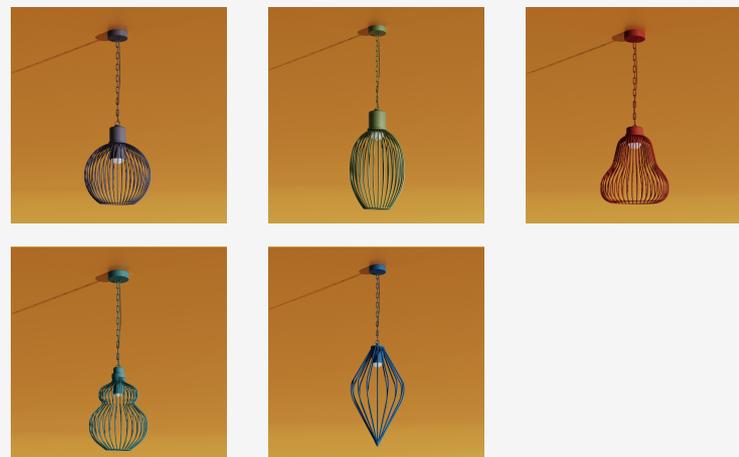

CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Height	Material	CCT
<input checked="" type="checkbox"/> VNT Outdoor Pendant	<input type="checkbox"/> 12 12" / 16" <input type="checkbox"/> 18 18" / 23" <input type="checkbox"/> 24 24" / 32" <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> SS Stainless Steel <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 27 2700K <input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 50 5000K
Wattage / Lumens	Light Distribution	Dimming	Body Finish Option
<input type="checkbox"/> 14 12 W / 1440 lm <input type="checkbox"/> 18 15 W / 1800 lm <input type="checkbox"/> 24 20 W / 2400 lm <input type="checkbox"/> Cus Custom on request	<input checked="" type="checkbox"/> DR Direct	<input type="checkbox"/> NN Non-Dimmable <input type="checkbox"/> DM 0-10V	<input type="checkbox"/> ST Standard <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request
Finish Type	Canopy Finish Option	Suspension Option	Stem/Chain Finish Option
<input type="checkbox"/> GL Glossy <input type="checkbox"/> MT Matte	<input type="checkbox"/> ST Standard <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> RGS Rigid Stem <input type="checkbox"/> MCH Metal Chain	<input type="checkbox"/> ST Standard <input type="checkbox"/> MC Metallic <input type="checkbox"/> Cus Custom on request
Stem/Chain Length			
<input type="checkbox"/> L8 8" <input type="checkbox"/> L16 16" <input type="checkbox"/> L24 24" <input type="checkbox"/> L32 32" <input type="checkbox"/> Cus Custom on request			

Project

Notes

Finishes

Standard finishes



Metallic finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL _ _ _ _

All RAL Classic colors are available with no setup fee.

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

