




GENERAL INFORMATION

RONEX SP is a modern circular pendant that combines minimal geometry with high-performance illumination. Crafted from precision-formed aluminum, the fixture delivers a clean, architectural presence while providing both direct and indirect lighting for balanced visual comfort. Its slim profile and wide range of diameters make it adaptable to various applications, from dining areas and workspaces to hospitality and commercial interiors. With efficient LED technology, multiple wattage options, and customizable finishes, RONEX SP offers a versatile lighting solution designed to integrate seamlessly into contemporary environments.

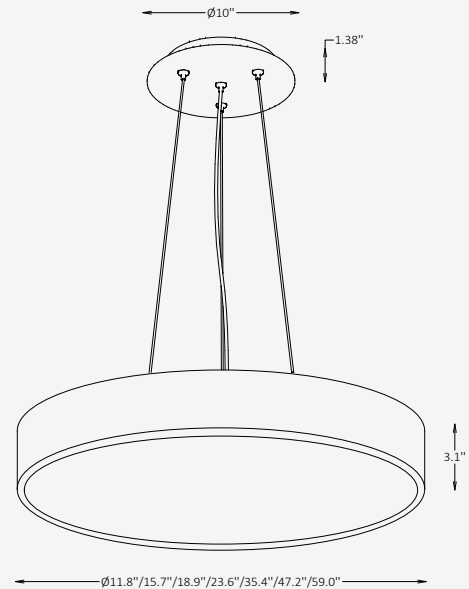

SPECIFICATIONS

| | |
|--------------------|---|
| Material | Aluminum |
| Diffuser | Acrylic, Frosted |
| Diameter | 11.8" / 15.7" / 18.9" / 23.6" / 35.4" / 47.2" / 59" |
| Height | 3.1" |
| Input Voltage | 110-277V |
| Light Source | LED |
| Power | 15W / 20W / 25W / 40W / 90W / 180W / 220W |
| LED Output | 85 lm/W |
| CCT | 3000K / 3500K / 4000K |
| CRI | 90 |
| Dimming & Driver | Integral, 0-10V |
| Light Distribution | Direct / Direct + Indirect |
| IP Rating | IP 20 |
| Warranty | 5 years |
| Finishes | White / Black 23 RAL finishes |

OTHER VERSIONS AVAILABLE



CERTIFICATION



Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.


| Code | Diameter Ø / Wattage / Lumens | | CCT |
|--|---|---|--|
| <input checked="" type="checkbox"/> RNX-SP Pendant | <input type="checkbox"/> 11-D 11.8" / 15W / ↓1275 lm | <input type="checkbox"/> 18-ID 18.9" / 50W / ↓2550 lm + ↑1700 lm | <input type="checkbox"/> 30 3000K |
| | <input type="checkbox"/> 15-D 15.7" / 20W / ↓1700 lm | <input type="checkbox"/> 23-ID 23.6" / 80W / ↓4250 lm + ↑2550 lm | <input type="checkbox"/> 35 3500K |
| | <input type="checkbox"/> 18-D 18.9" / 25W / ↓2125 lm | <input type="checkbox"/> 35-ID 35.4" / 120W / ↓6120 lm + ↑4080 lm | <input type="checkbox"/> 40 4000K |
| | <input type="checkbox"/> 23-D 23.6" / 40W / ↓3400 lm | <input type="checkbox"/> 47-ID 47.2" / 220W / ↓11,220 lm + ↑7480 lm | |
| | <input type="checkbox"/> 35-D 35.4" / 90W / ↓7650 lm | <input type="checkbox"/> 59-ID 59" / 220W / ↓11,220 lm + ↑7480 lm | |
| | <input type="checkbox"/> 47-D 47.2" / 180W / ↓15,300 lm | | |
| | <input type="checkbox"/> 59-D 59.2" / 220W / ↓18,700 lm | | |
| Dimming | Profile Finish Option | Canopy Finish Option | Cord Finish Option |
| <input type="checkbox"/> NN Non-Dimmable | <input type="checkbox"/> ST Standard | <input type="checkbox"/> ST Standard | <input type="checkbox"/> SVW White |
| <input type="checkbox"/> DM 0-10V | <input type="checkbox"/> RAL RAL finishes | <input type="checkbox"/> RAL RAL finishes | <input type="checkbox"/> SVB Black |
| Cord Length | Mounting | | |
| <input type="checkbox"/> L6 59" (adjustable) | <input type="checkbox"/> CT Central Canopy Suspension | | |
| <input type="checkbox"/> Cus Custom on request | <input type="checkbox"/> MO Multi-Point Suspension | | |

Finishes


Standard finishes



RAL finishes

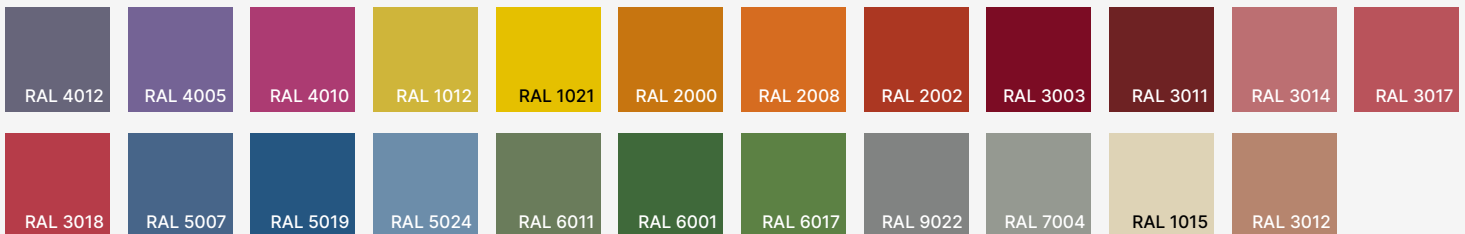

Cord finishes



RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _

All RAL Classic colors are available

On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).

