




GENERAL INFORMATION


The LINE-X is a modular lighting element engineered for the Modari A-Track Core magnetic track system, offering clean linear illumination and versatile placement. Constructed from precision-formed aluminum with a frosted acrylic diffuser, it delivers consistent, glare-free light suitable for both ambient and task applications. Available in multiple lengths, dimming options, and finish selections, the LINE-X provides a refined balance of performance, flexibility, and architectural appeal within contemporary lighting compositions.

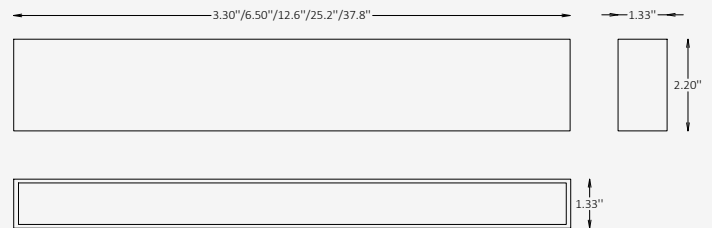

MODULE SPECIFICATIONS

Material	Aluminum
Lens	Acrylic, Frosted
Length	3.31" / 6.46" / 12.6" / 25.2" / 37.8"
Width	1.34"
Height	2.2"
Input Voltage	DC 24V
Light Source Type	LED
Power	4W / 7W / 13W / 26W / 39W
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

OTHER VERSIONS AVAILABLE

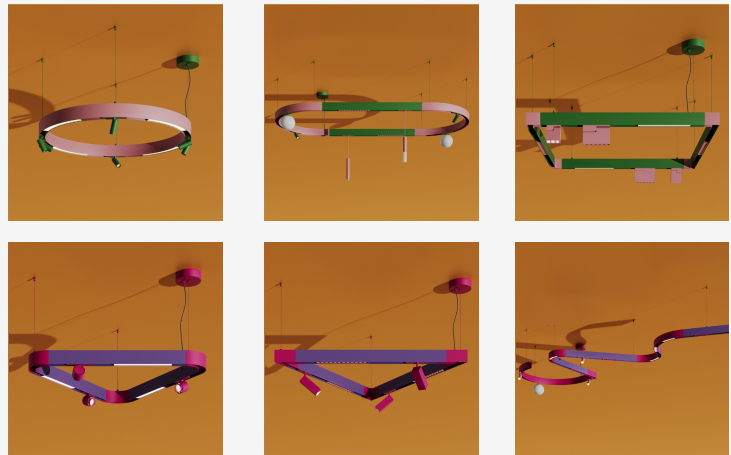

CERTIFICATION




Line-X Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Module Length / Wattage / Lumens	CCT
<input checked="" type="checkbox"/> LNX Line-X Module	<input type="checkbox"/> D24 DC 24V	<input type="checkbox"/> 3 3.31" / 4 W / 223 lm	<input type="checkbox"/> 27 2700K
	<input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 6 6.46" / 7 W / 488 lm	<input type="checkbox"/> 30 3000K
		<input type="checkbox"/> 12 12.6" / 13 W / 895 lm	<input type="checkbox"/> 40 4000K
		<input type="checkbox"/> 25 25.2" / 26 W / 1720 lm	<input type="checkbox"/> Cus Custom on request
		<input type="checkbox"/> 37 37.8" / 39 W / 2550 lm	
Light Distribution	CRI	Dimming	Finish Option
<input checked="" type="checkbox"/> DF Diffused	<input type="checkbox"/> CR8 80	<input type="checkbox"/> NN Non-Dimmable	<input type="checkbox"/> ST Standard
	<input type="checkbox"/> CR9 90	<input type="checkbox"/> DM0 0-10V	<input type="checkbox"/> WE Wood effect
		<input type="checkbox"/> DM1 1-10V	<input type="checkbox"/> MC Metallic
		<input type="checkbox"/> DL DALI	<input type="checkbox"/> Cus Custom on request
		<input type="checkbox"/> TR TRIAC	

Line-X Module Finishes


Standard finishes

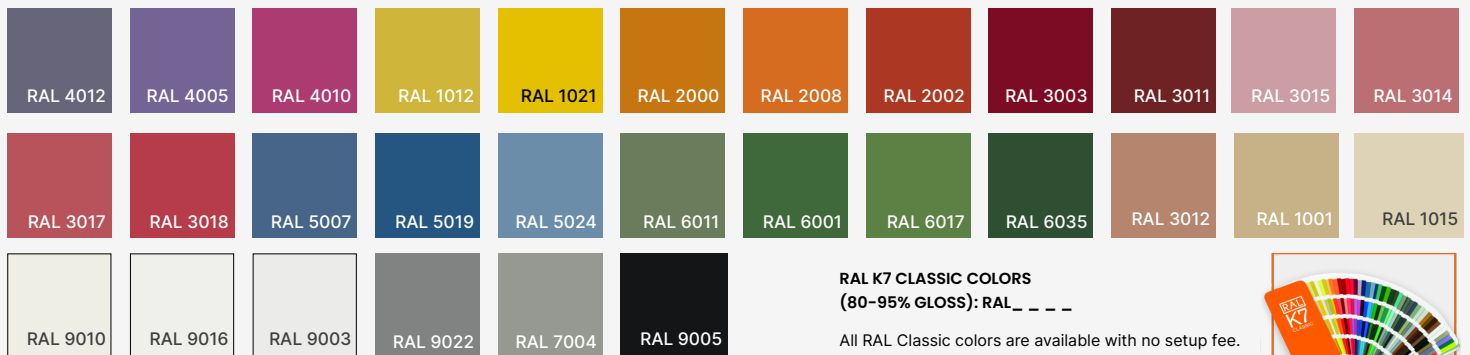

Wood-effect finishes




Metallic finishes



Photometric Data

Line-X 3


Diffuse



h(m)	E(lx)	Φ(m)
1	88	Φ2.38
2	22	Φ4.77
3	9	Φ7.16
4	5	Φ9.55
5	3	Φ11.94

Line-X 6


Diffuse



h(m)	E(lx)	Φ(m)
1	189	Φ2.46
2	47	Φ4.92
3	21	Φ7.38
4	11	Φ9.84
5	7	Φ12.30

Line-X 12


Diffuse



h(m)	E(lx)	Φ(m)
1	189	Φ2.46
2	47	Φ4.92
3	21	Φ7.38
4	11	Φ9.84
5	7	Φ12.30

Line-X 25


Diffuse



h(m)	E(lx)	Φ(m)
1	344	Φ2.47
2	86	Φ4.94
3	38	Φ7.41
4	21	Φ9.88
5	13	Φ12.35

Line-X 25

Diffuse



h(m)	E(lx)	Φ(m)
1	661	Φ2.47
2	165	Φ4.94
3	73	Φ7.41
4	41	Φ9.88
5	26	Φ12.36