




GENERAL INFORMATION


The A-CELL module is a precision-engineered linear lighting element designed for the Modari A-Track Core magnetic track system. With a slim aluminum profile and frosted acrylic lens, it delivers controlled, high-efficiency illumination with multiple beam angles for tailored light distribution. Available in a wide range of color temperatures and finishes, A-CELL integrates seamlessly into architectural environments, providing both performance and visual refinement in contemporary lighting compositions.

MODULE SPECIFICATIONS

Material	Aluminum
Length	1.33" / 3.31" / 6.46" / 12.6"
Width	1.33"
Height	2.2"
Input Voltage	DC 24V
Light Source Type	LED
Power	2W / 4W / 8W / 16W
CCT	2700K / 3000K / 4000K
Beam Angle	12° / 34° / 48°
CRI	80 / 90
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

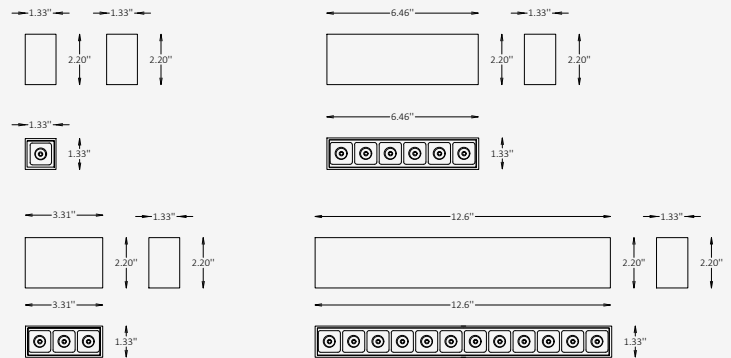

OTHER VERSIONS AVAILABLE

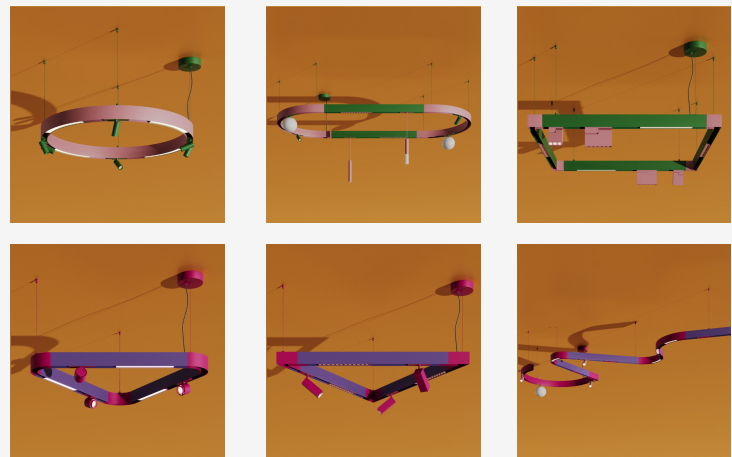

CERTIFICATION




A-Cell Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Length / Wattage / Lumens	CCT
<input checked="" type="checkbox"/> CL A-Cell Module	<input type="checkbox"/> D24 DC 24V	<input type="checkbox"/> 1 1.33" / 2 W / 126 lm	<input type="checkbox"/> 27 2700K
	<input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 3 3.31" / 4 W / 382 lm	<input type="checkbox"/> 30 3000K
		<input type="checkbox"/> 6 6.46" / 8 W / 733 lm	<input type="checkbox"/> 40 4000K
		<input type="checkbox"/> 12 12.6" / 16 W / 1440 lm	<input type="checkbox"/> Cus Custom on request
Beam Angle	CRI	Dimming	Finish Option
<input type="checkbox"/> B12 12°	<input type="checkbox"/> CR8 80	<input type="checkbox"/> NN Non-Dimmable	<input type="checkbox"/> ST Standard
<input type="checkbox"/> B34 34°	<input type="checkbox"/> CR9 90	<input type="checkbox"/> DM0 0-10V	<input type="checkbox"/> WE Wood effect
<input type="checkbox"/> B48 48°		<input type="checkbox"/> DM1 1-10V	<input type="checkbox"/> MC Metallic
		<input type="checkbox"/> DL DALI	<input type="checkbox"/> Cus Custom on request
		<input type="checkbox"/> TR TRIAC	

A-Cell Module Finishes


Standard finishes

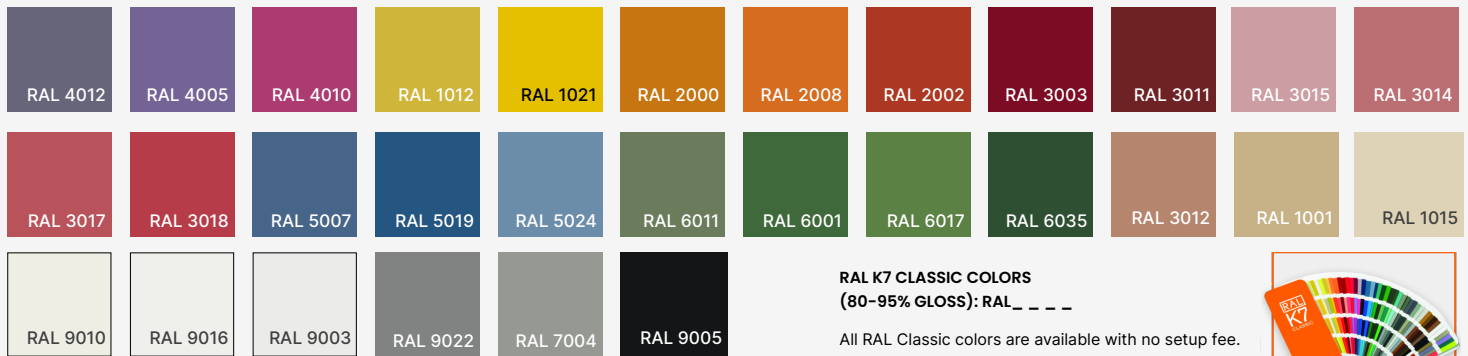

Wood-effect finishes




Metallic finishes




Photometric Data


A-Cell 1 / 12°

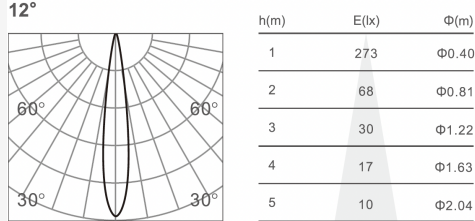


A-Cell 3 / 12°

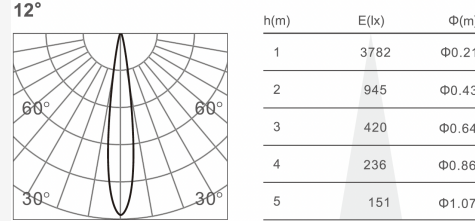


A-Cell 6 / 12°

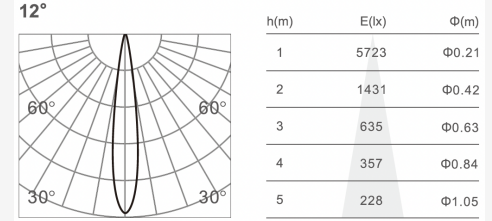


A-Cell 1 / 34°

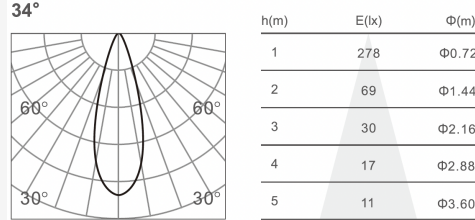


A-Cell 3 / 34°

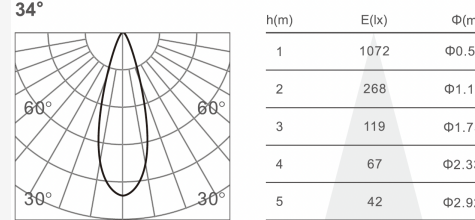


A-Cell 6 / 34°

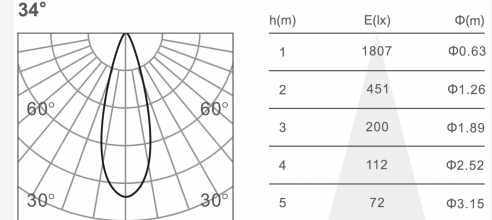


A-Cell 1 / 48°

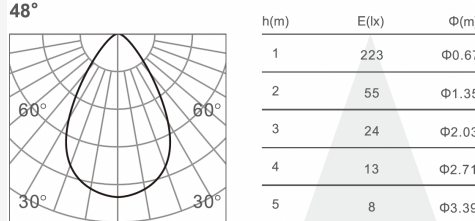


A-Cell 3 / 48°

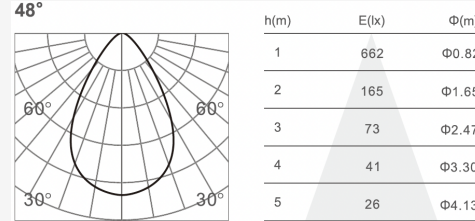


A-Cell 6 / 48°

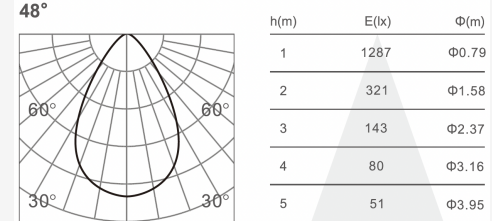

A-Cell 12 / 12°

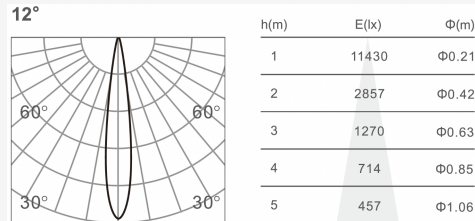

A-Cell 12 / 34°

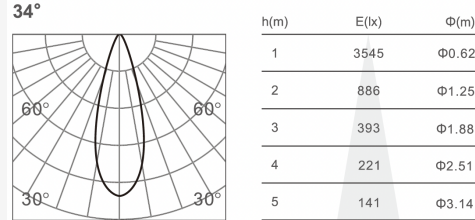

A-Cell 12 / 48°

