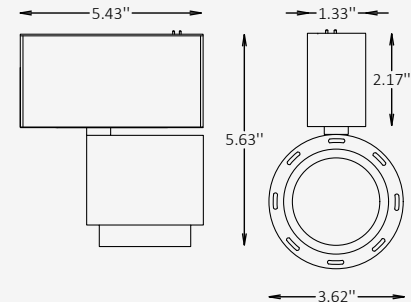
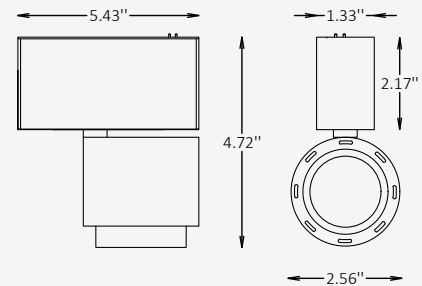




GENERAL INFORMATION


The A-VUE is a high-precision spotlight module for the MODARI A-Track Core magnetic track system, designed to deliver clean, focused illumination with a selection of beam angles for adaptable lighting control. Its compact aluminum body and refined optics ensure visual comfort and accuracy, making it ideal for accent, retail, or architectural applications. With multiple dimming options and finish choices, A-VUE integrates effortlessly into both functional and decorative lighting compositions.



MODULE SPECIFICATIONS

Material	Aluminum
Diameter	2.55" / 3.62"
Height	2.55" / 3.46"
Input Voltage	DC 24V
Light Source Type	LED
Power	8W / 15W
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Beam Angle	10° / 20° / 30°
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

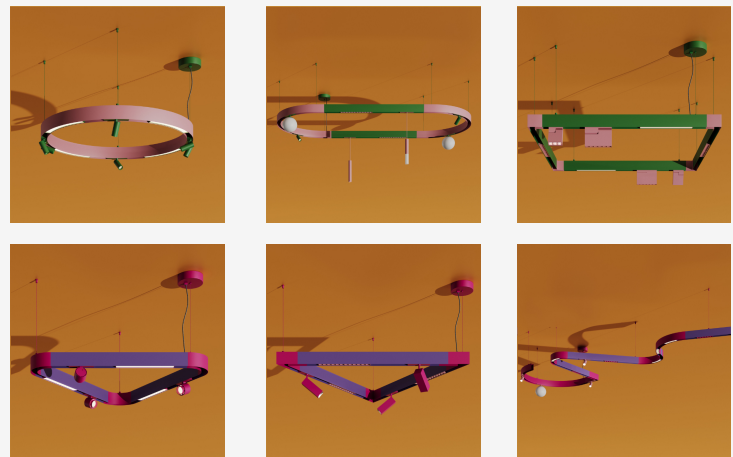OTHER VERSIONS AVAILABLE



CERTIFICATION


































A-View Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Diameter / Height / Wattage / Lumens	CCT
<input checked="" type="checkbox"/> VUE A-View Module	<input type="checkbox"/> D24 DC 24V	<input type="checkbox"/> 2 2.55" / 2.55" / 8 W / 251 lm	<input type="checkbox"/> 27 2700K
	<input type="checkbox"/> Cus Custom on request	<input type="checkbox"/> 3 3.62" / 3.46" / 15 W / 481 lm	<input type="checkbox"/> 30 3000K
			<input type="checkbox"/> 40 4000K
			<input type="checkbox"/> Cus Custom on request
Beam Angle	CRI	Dimming	Finish Option
<input type="checkbox"/> B10 10°	<input type="checkbox"/> CR8 80	<input type="checkbox"/> NN Non-Dimmable	<input type="checkbox"/> ST Standard
<input type="checkbox"/> B20 20°	<input type="checkbox"/> CR9 90	<input type="checkbox"/> DM0 0-10V	<input type="checkbox"/> WE Wood effect
<input type="checkbox"/> B30 30°		<input type="checkbox"/> DM1 1-10V	<input type="checkbox"/> MC Metallic
		<input type="checkbox"/> DL DALI	<input type="checkbox"/> Cus Custom on request
		<input type="checkbox"/> TR TRIAC	

A-View Module Finishes



Standard finishes

 RAL 4012	 RAL 4005	 RAL 4010	 RAL 1012	 RAL 1021	 RAL 2000	 RAL 2008	 RAL 2002	 RAL 3003	 RAL 3011	 RAL 3015	 RAL 3014
 RAL 3017	 RAL 3018	 RAL 5007	 RAL 5019	 RAL 5024	 RAL 6011	 RAL 6001	 RAL 6017	 RAL 6035	 RAL 3012	 RAL 1001	 RAL 1015
 RAL 9010	 RAL 9016	 RAL 9003	 RAL 9022	 RAL 7004	 RAL 9005	<p>RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _</p> <p>All RAL Classic colors are available with no setup fee.</p> <p>On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).</p> 					

Wood-effect finishes


 WO WHITE OAK	 OA OAK	 HO HONEY OAK	 MP MAPLE	 WT WALNUT	 MG MAHOGANY	 DO DARK OAK	 ES ESPRESSO
--	---	---	---	--	--	--	---

Metallic finishes

 SB SHINY BRONZE	 GL GOLD
--	--


Photometric Data

A-Vue 2 / 10°




h(m)	E(lx)	Φ(m)
1	4109	Φ0.20
2	1027	Φ0.40
3	456	Φ0.61
4	256	Φ0.81
5	164	Φ1.02

A-Vue 2 / 20°




h(m)	E(lx)	Φ(m)
1	4109	Φ0.20
2	1027	Φ0.40
3	456	Φ0.61
4	256	Φ0.81
5	164	Φ1.02

A-Vue 2 / 30°




h(m)	E(lx)	Φ(m)
1	4109	Φ0.20
2	1027	Φ0.40
3	456	Φ0.61
4	256	Φ0.81
5	164	Φ1.02

A-Vue 3 / 10°




h(m)	E(lx)	Φ(m)
1	9750	Φ0.20
2	2437	Φ0.40
3	1083	Φ0.60
4	609	Φ0.80
5	390	Φ1.00

A-Vue 3 / 20°



h(m)	E(lx)	Φ(m)
1	6022	Φ0.25
2	1505	Φ0.50
3	669	Φ0.75
4	376	Φ1.00
5	240	Φ1.25

A-Vue 3 / 30°



h(m)	E(lx)	Φ(m)
1	2204	Φ0.39
2	551	Φ0.79
3	244	Φ1.19
4	137	Φ1.59
5	88	Φ1.99