



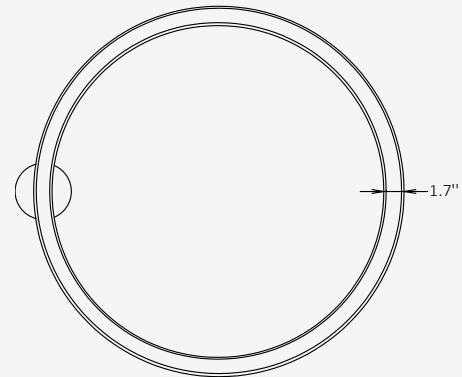

## GENERAL INFORMATION

The Orbita Core Circle is a high-output architectural pendant designed to deliver powerful and balanced illumination in downlight and uplight directions. Featuring a bold, dimensional profile with precision-engineered aluminum construction, this fixture offers outstanding performance for large-scale commercial interiors, lobbies, and public spaces. Available in a range of diameters up to 197", the Core Circle supports Beam Up & Down configuration, enabling design flexibility across varied ceiling heights and lighting needs. Its refined aesthetic and clean finish options make it ideal for projects requiring both function and visual impact.

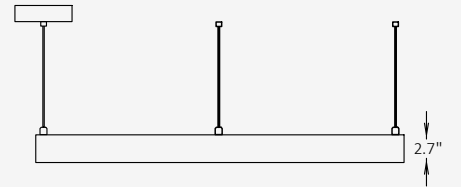


→ Ø23.6"/35.4"/47.2"/59.1"/78.7"/98.4"/118.1"/157.5"/196.9" ←

## SPECIFICATIONS

Material	Aluminum
Lens	Polycarbonate
Diameter	23.6" / 35.4" / 47.2" / 59.1" / 78.7" / 98.4" / 118.1" / 157.5" / 196.9"
Profile Height	2.7"
Profile Width	1.7"
Input Voltage	110-277V, 50-60 Hz
Light Source Type	LED
Power	65W / 80W / 120W / 135W / 150W / 200W / 300W / 400W / 480W
LED Output	85 lm/W
CCT	3000K / 3500K / 4000K
CRI	90
Dimming & Driver	Integral, 0-10V
Light Distribution	Beam Up & Down
IP Rating	IP 20
Warranty	5 years
Finishes	Satin White / Satin Black / RAL finishes

## OTHER VERSIONS AVAILABLE

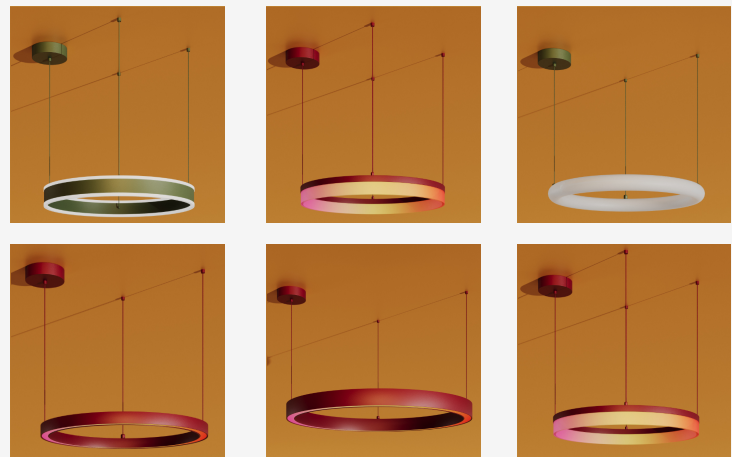

## CERTIFICATION



## Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Diameter Ø / Wattage / Lumens		CCT
<input checked="" type="checkbox"/> <b>OTC</b> Circle / Pendant	<input type="checkbox"/> <b>23</b> 23.6" / 65 W / 3400 + 2125 lm	<input type="checkbox"/> <b>98</b> 98.4" / 200 W / 12,750 + 4250 lm	<input type="checkbox"/> <b>30</b> 3000K
	<input type="checkbox"/> <b>35</b> 35.4" / 80 W / 4760 + 2040 lm	<input type="checkbox"/> <b>118</b> 118.1" / 300 W / 17,850 + 7650 lm	<input type="checkbox"/> <b>35</b> 3500K
	<input type="checkbox"/> <b>47</b> 47.2" / 120 W / 7140 + 3060 lm	<input type="checkbox"/> <b>157</b> 157.5" / 400 W / 25,500 + 8500 lm	<input type="checkbox"/> <b>40</b> 4000K
	<input type="checkbox"/> <b>59</b> 59.1" / 135 W / 7650 + 3825 lm	<input type="checkbox"/> <b>196</b> 196.9" / 480 W / 28,560 + 12,240 lm	
	<input type="checkbox"/> <b>78</b> 78.7" / 150 W / 8925 + 3825 lm		
Light Distribution	Dimming	CRI	Profile Finish Option
<input checked="" type="checkbox"/> <b>BUD</b> Beam Up & Down	<input type="checkbox"/> <b>NN</b> Non-Dimmable	<input checked="" type="checkbox"/> <b>CR9</b> 90	<input type="checkbox"/> <b>SW</b> Satin White
	<input type="checkbox"/> <b>DM</b> 0-10V		<input type="checkbox"/> <b>SB</b> Satin Black
			<input type="checkbox"/> <b>RAL</b> RAL Finishes
Canopy Finish Option	Cord Finish Option	Mounting	Cord Length
<input type="checkbox"/> <b>WH</b> White	<input type="checkbox"/> <b>SVW</b> White	<input type="checkbox"/> <b>CT</b> Central Canopy Suspension	<input type="checkbox"/> <b>L6</b> 59" (adjustable)
<input type="checkbox"/> <b>BL</b> Black	<input type="checkbox"/> <b>SVB</b> Black	<input type="checkbox"/> <b>MO</b> Multi-Point Suspension	<input type="checkbox"/> <b>Cus</b> Custom on request
<input type="checkbox"/> <b>RAL</b> RAL Finishes		<small>*Central Canopy Suspension Mounting is only available for diameters of 23" / 35" / 47" / 59"</small>	

## Finishes


### Standard finishes



### RAL finishes



### Cord finishes



**RAL K7 CLASSIC COLORS**  
(80-95% GLOSS): RAL\_ \_ \_ \_

All RAL Classic colors are available.


On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).



Project

Notes

# Photometric Data

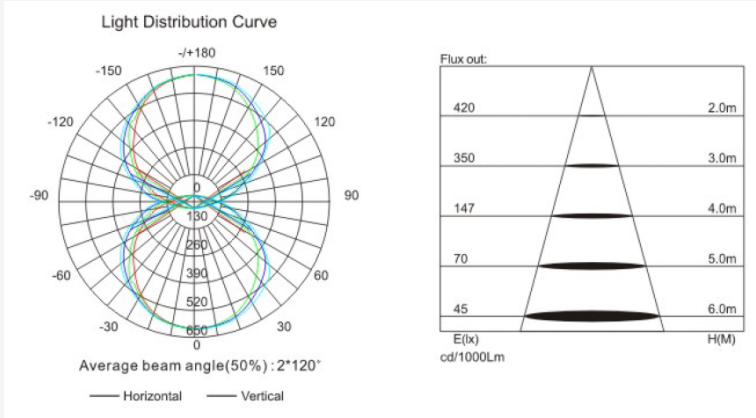

DBI MILK